


716003

PCR8E7/1

ELECTRIC BOILING TOP WITH 4 ROUND HERMETIC PLATES (DIAM. 22CM - 8.7 IN, TOP VERSION)



- Electric boiling top (80 cm) with 4 cast-iron, round plates (22 cm diameter).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron electric plates hermetically sealed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	10,4 kW	ELECTRIC POWER	10,4 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
BOILING TOP POWER	10,4 kW	COOKING ZONE POWER	4x2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	Ø 22 cm	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	721 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	IPX RATING	4
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	86 cm
PACKAGE DEPTH	80 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	30 kg	GROSS WEIGHT	38,2 kg
VOLUME	0,38 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	832.0 W	SENSIBLE HEAT RELEASE	2080.0 W
STEAM RELEASE	1227.2 g/h		

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

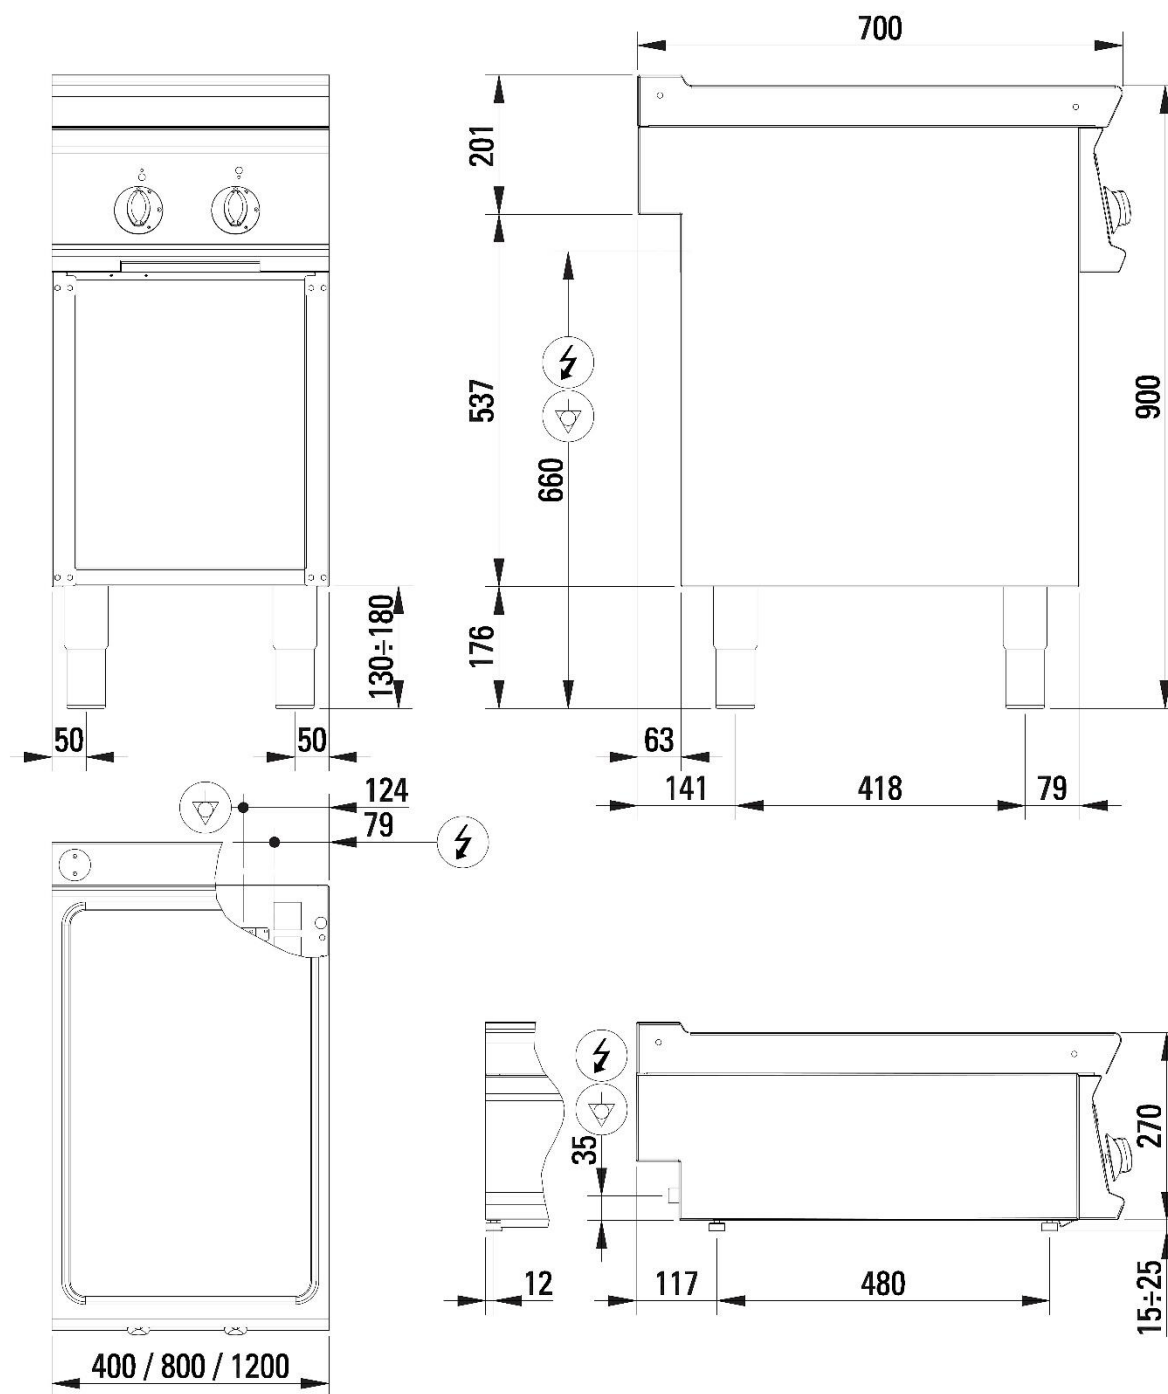


Fig.1 | Abb.1 | рис.1 - 5415.648.00