


716007

PCS12E7

ELECTRIC BOILING TOP WITH 6 SQUARED HERMETIC PLATES (22X22 CM - 8.7X8.7 IN, TOP VERSION)



- Electric boiling top (120 cm) with 6 squared cast iron plates (22x22 cm).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron electric plates hermetically sealed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.

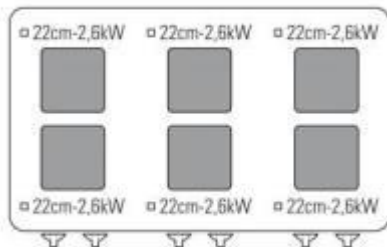

TECHNICAL DATA

TOTAL POWER	15,6 kW	ELECTRIC POWER	15,6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	15,6 kW	COOKING ZONE POWER	6x2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	22x22 cm	NUMBER OF COOKING ZONES	n° 6
MINIMUM POWER CABLE CROSS-SECTION	5 x 4 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	1121 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	127,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	54,0 cm
NET WEIGHT	55,8 kg	GROSS WEIGHT	65,8 kg
VOLUME	0,5500 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1248.0 W	SENSIBLE HEAT RELEASE	3120.0 W
STEAM RELEASE	1840.8 g/h		

ACCESSORIES

- 620690 TOP FRAME FOR 2 SQUARE HOT PLATES
 799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

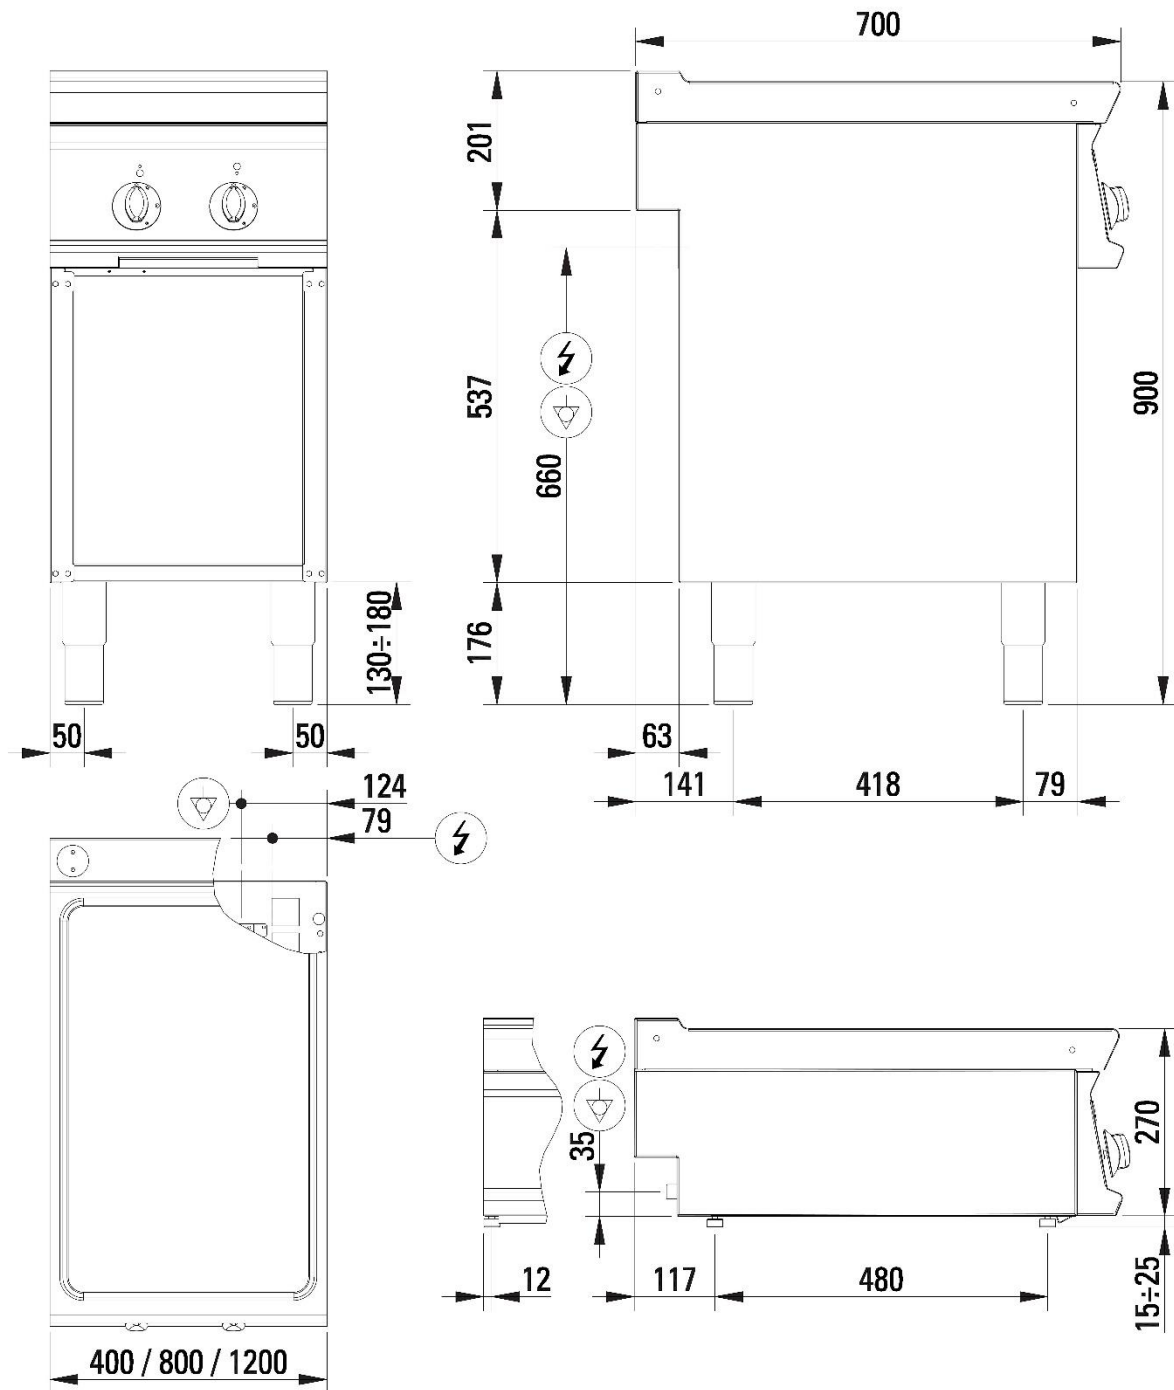


Fig.1 | Abb.1 | рис.1 - 5415.648.00