


716015

PCC4E7

## GLASS CERAMIC ELECTRIC BOILING TOP WITH 2 HEATING ZONES (TOP VERSION)



- Glass ceramic electric boiling top (40 cm) with 2 independent cooking zones.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top worktop for maximum hygiene and ease of cleaning.
- Ultra-fast radiant heating elements (3.4 kW) for each independent area.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent zone.
- Energy regulator 0-6-infinite.
- Temperature limiter to prevent overheating.
- Heating and control commands specific for each zone.
- Lights warning when the heating zones are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.

## TECHNICAL DATA

TOTAL POWER	4,3 kW	ELECTRIC POWER	4,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	4,3 kW	COOKING ZONE POWER	1x1,8 + 1x2,5 n°- kW
2-ZONE HEATING ELEMENTS	n° 1	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 2	ELECTRICAL CONNECTION HEIGHT (H)	35 mm
ELECTRICAL CONNECTION HEIGHT (X)	361 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	56 cm	NET WEIGHT	16,6000 kg
GROSS WEIGHT	22,2000 kg	VOLUME	0,21 m <sup>3</sup>
HARMONISED CODE	84198180	LATENT HEAT RELEASE	344.0 W
SENSIBLE HEAT RELEASE	860.0 W	STEAM RELEASE	507.4 g/h

## ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

## INSTALLATION SCHEMES

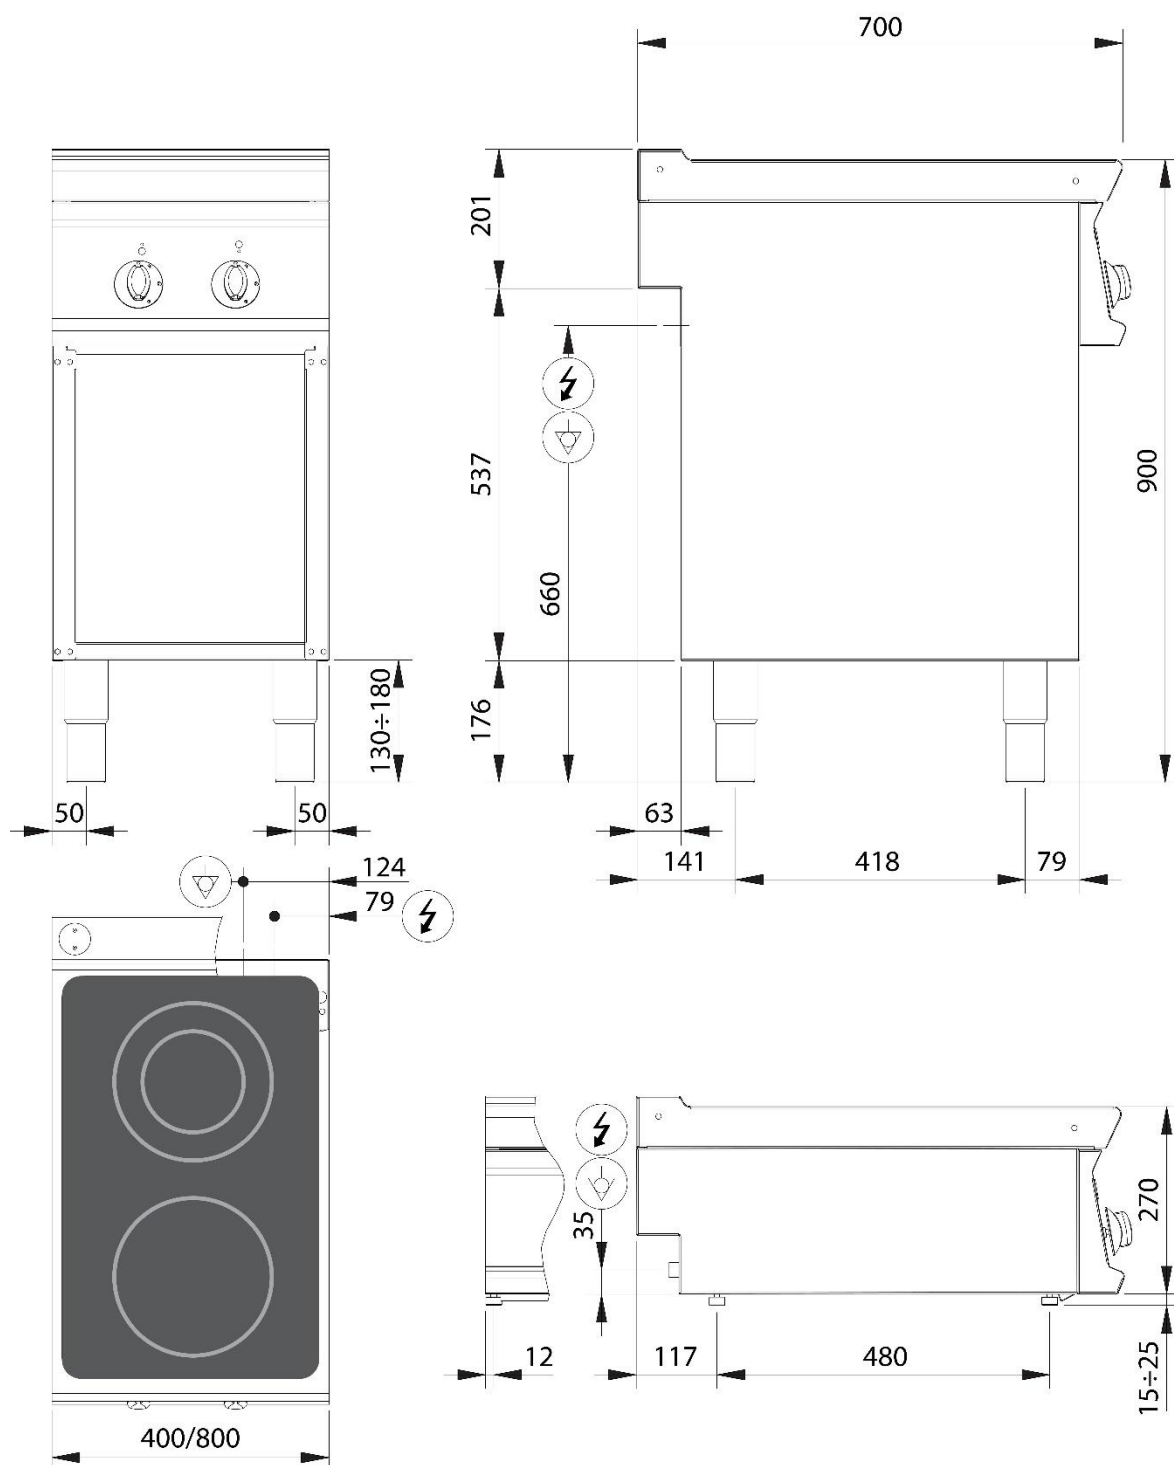


Fig.1 | Abb.1 | рис.1 - 5415.650.00