


---

**716081****PIW4E7****WOK INDUCTION BOILING TOP**

---



- Freestanding wok induction boiling top (40 cm) on an open cabinet.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic top (Ø 30 and 6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 5 kW single area.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other wok types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED light for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction wok pans.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.

---

**TECHNICAL DATA**

TOTAL POWER	5 kW	ELECTRIC POWER	5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	1x5 n°- kW	CABINET DIMENSIONS	33x57,4x39,5 cm
NUMBER OF COOKING ZONES	n° 1	MINIMUM POWER CABLE CROSS-SECTION	4 x 1,5 n° - mm <sup>2</sup>
ELECTRIC CABLE TYPE	H07 RN-F	CAMPO_0079	0001
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	361 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	56 cm
NET WEIGHT	25,1 kg	GROSS WEIGHT	30,5 kg
VOLUME	0,21 m <sup>3</sup>	HARMONISED CODE	84198180

---

**ACCESSORIES**

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

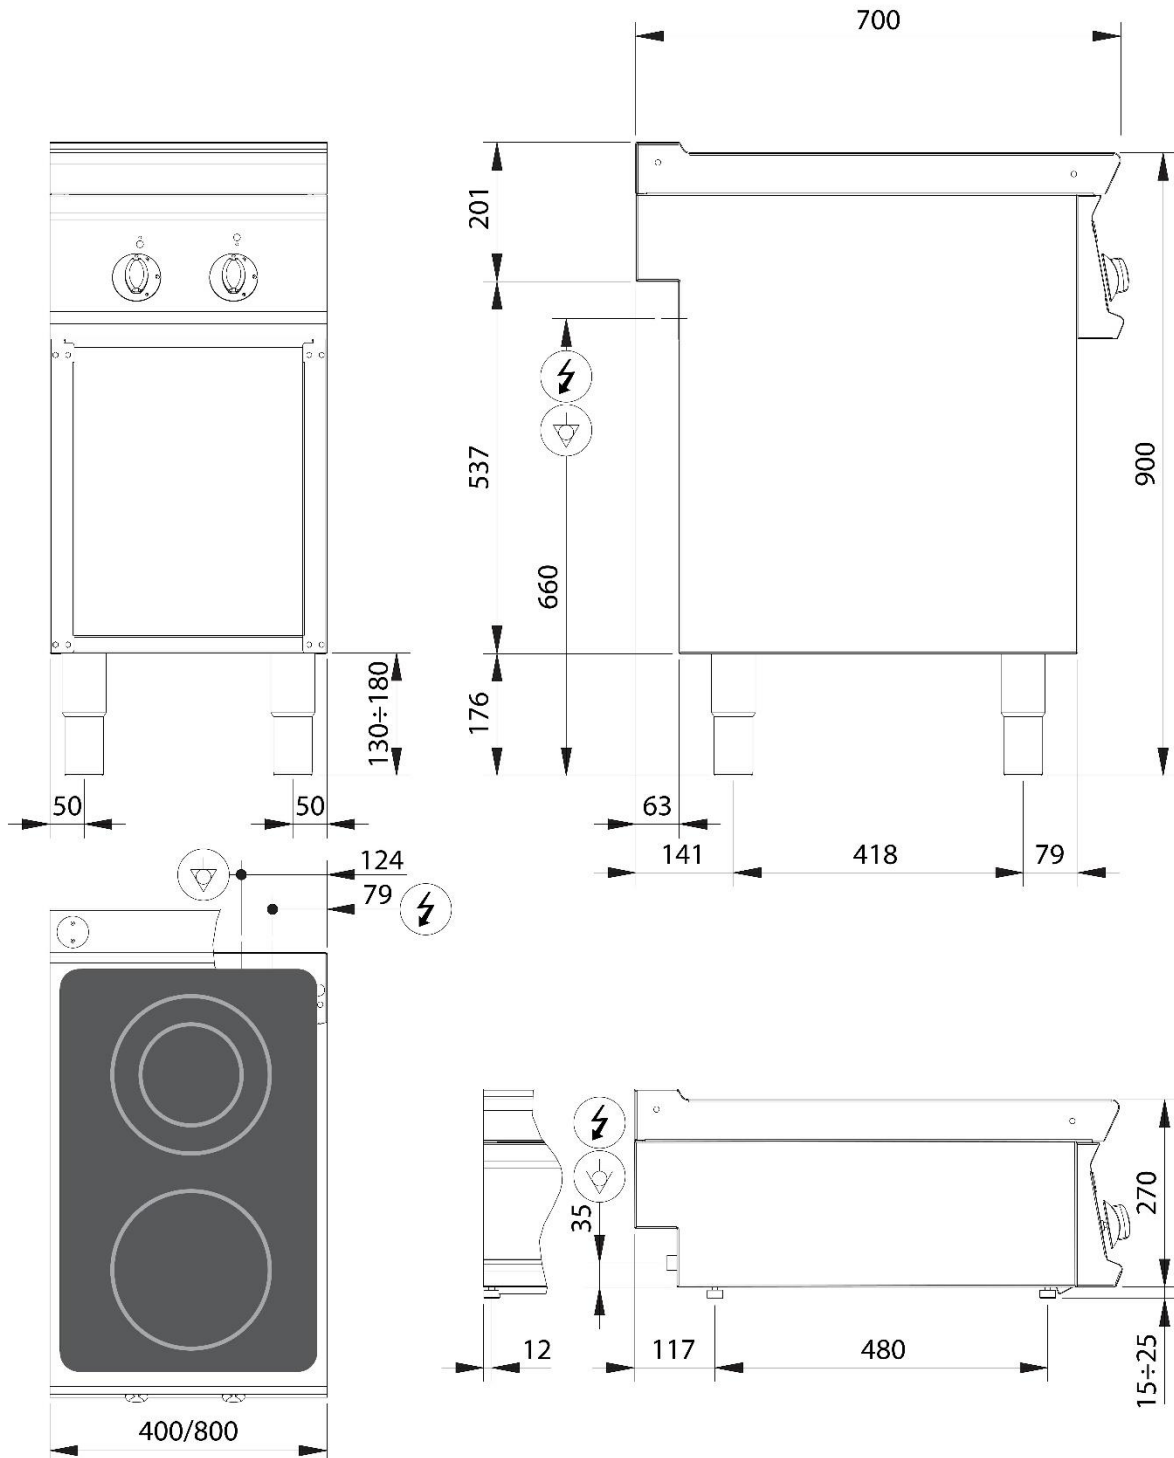


Fig.1 | Abb.1 | рис.1 - 5415.650.00