

716082

PIW4FE7

FREESTANDING WOK INDUCTION BOILING TOP ON OPEN CABINET



- Freestanding wok induction boiling top (40 cm), top version.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic top (Ø 30 and 6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 5 kW single area.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other wok types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED light for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction wok pans.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.

TECHNICAL DATA

TOTAL POWER	5 kW	ELECTRIC POWER	5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	1x5 n°- kW	CABINET DIMENSIONS	33x57,4x39,5 cm
NUMBER OF COOKING ZONES	n° 1	MINIMUM POWER CABLE CROSS-SECTION	4 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	CAMPO_0079	0001
ELECTRICAL CONNECTION HEIGHT (H)	660 mm	ELECTRICAL CONNECTION HEIGHT (X)	361 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	46 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	31 kg	GROSS WEIGHT	46 kg
VOLUME	0,42 m ³	HARMONISED CODE	84198180

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719004	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

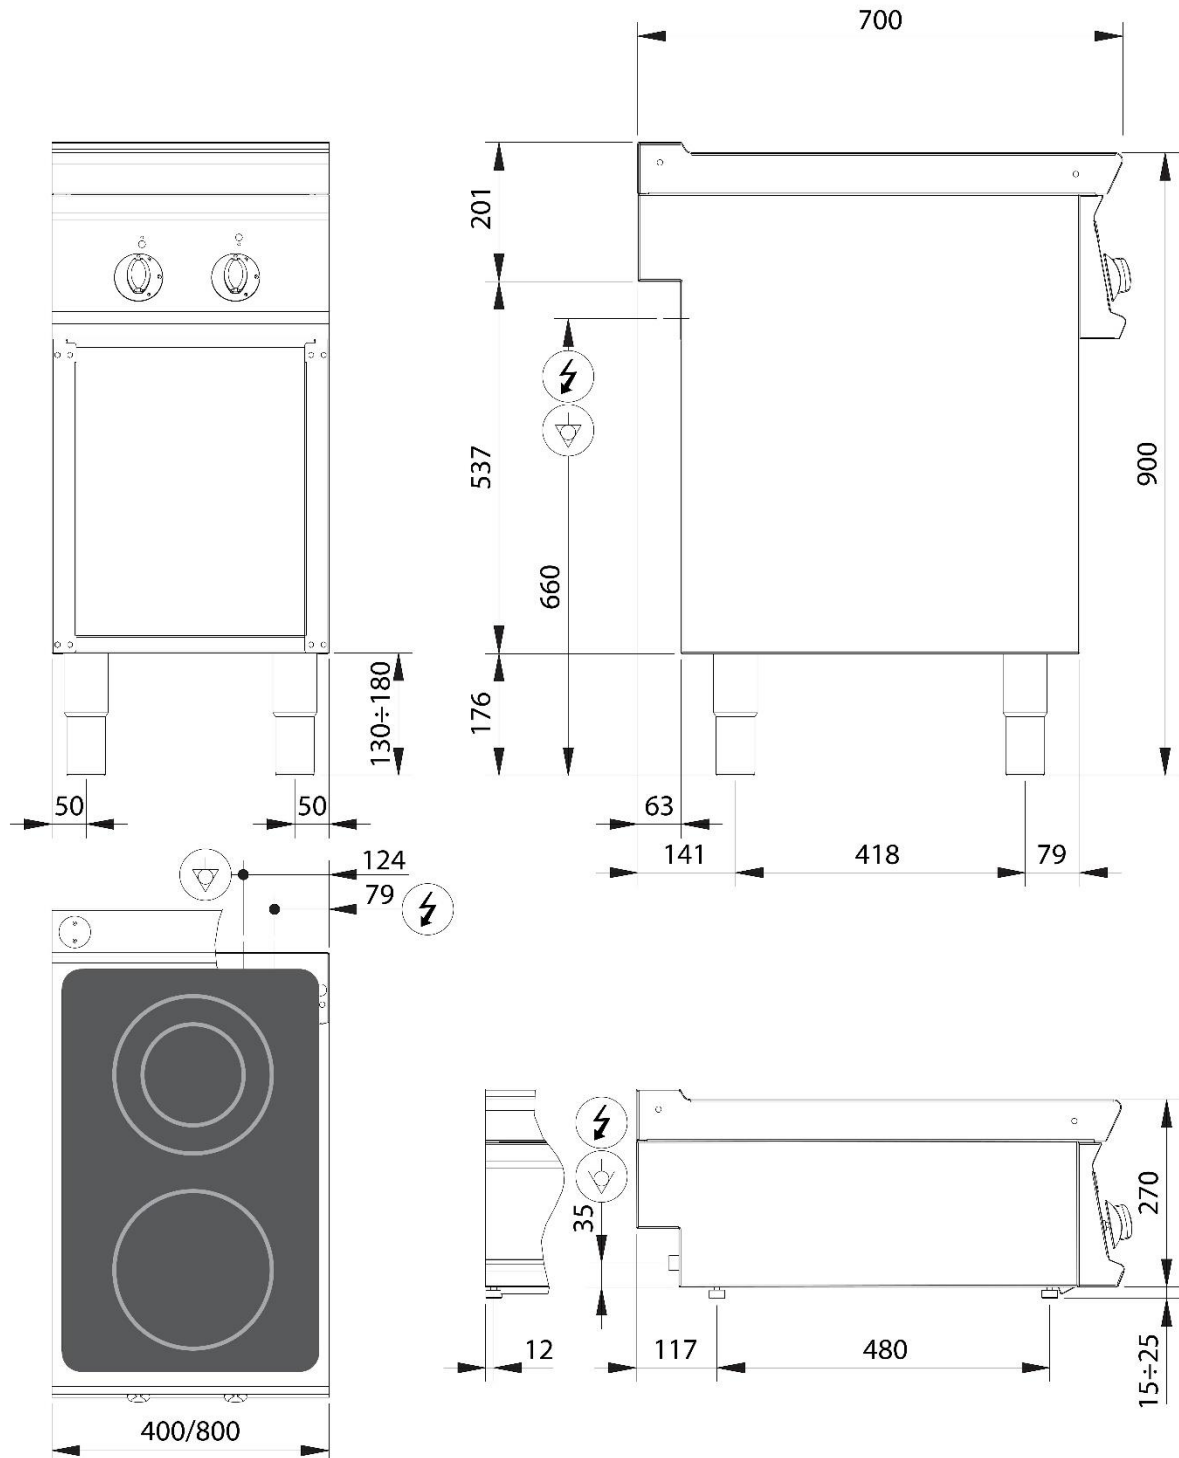


Fig.1 | Abb.1 | рис.1 - 5415.650.00