TECNO74



716099

PCU4E7

ELECTRIC BOILING TOP WITH 2 SQUARED COPLANAR TILTING PLATES (30X30 CM - 11.8X11.8 IN, TOP VERSION)



- Boiling top (40 cm) with 2 coplanar, tilting, electric plates.
- Coplanar, tilting, squared, cast iron electric plates (30x30 cm and 8 mm thick) not hermetically sealed to the worktop.
- 3 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Drawer to collect cooking residue.
- Height-adjustable rubberised plastic feet (15-25 mm).
- \bullet AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA			
TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	6 kW	COOKING ZONE POWER	2X3 n°- kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	56 cm
NET WEIGHT	46,5 kg	GROSS WEIGHT	52 kg
VOLUME	0,21 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	480.0 W	SENSIBLE HEAT RELEASE	1200.0 W
STEAM RELEASE	708.0 g/h		

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)



INSTALLATION SCHEMES

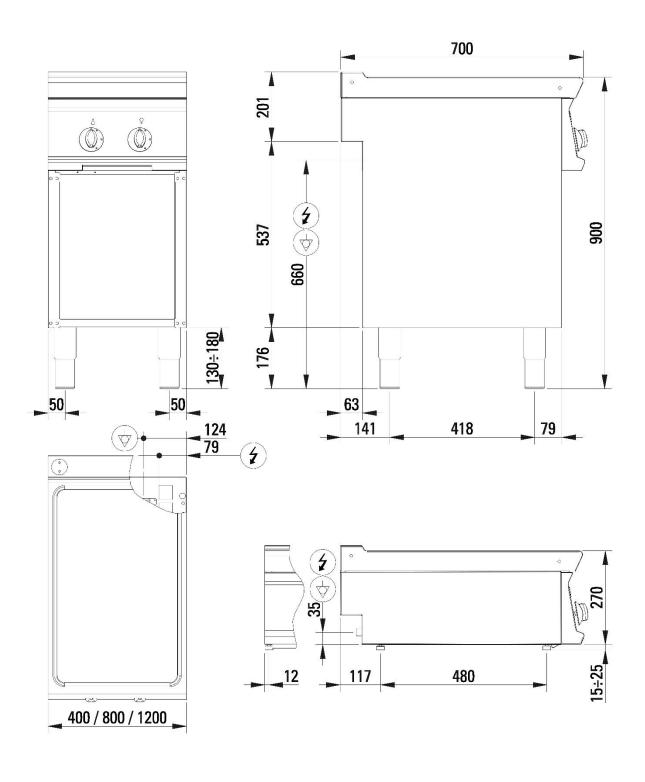


Fig.1 | Abb.1 | рис.1 - 5415.648.00