
716132

BRMD4FE7

**FREESTANDING ELECTRIC MULTI-PURPOSE
BRATT PAN 15L WITH DUPLEX TANK BOTTOM AND
ELECTRONIC CONTROL ON OPEN CABINET**



- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Freestanding multi-purpose electric bratt pan 28 L with electronic control on an open cabinet (80 cm).

TECHNICAL DATA

TOTAL POWER	4,5 kW	ELECTRIC POWER	4,5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	50÷320 °C	TANK CAPACITY	15t
TANK DIMENSIONS	30,5x57x10,2 cm	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
TANK BOTTOM THICKNESS	3(AISI316)+12(Fe510) mm	DRAINING THE TANK	Drain in the tank
ELECTRIC CABLE TYPE	H07 RN-F	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	81 cm
PACKAGE DEPTH	47 cm	PACKAGE HEIGHT	114 cm
NET WEIGHT	42 kg	GROSS WEIGHT	52 kg
VOLUME	0,43 m ³	HARMONISED CODE	84198180

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719004	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

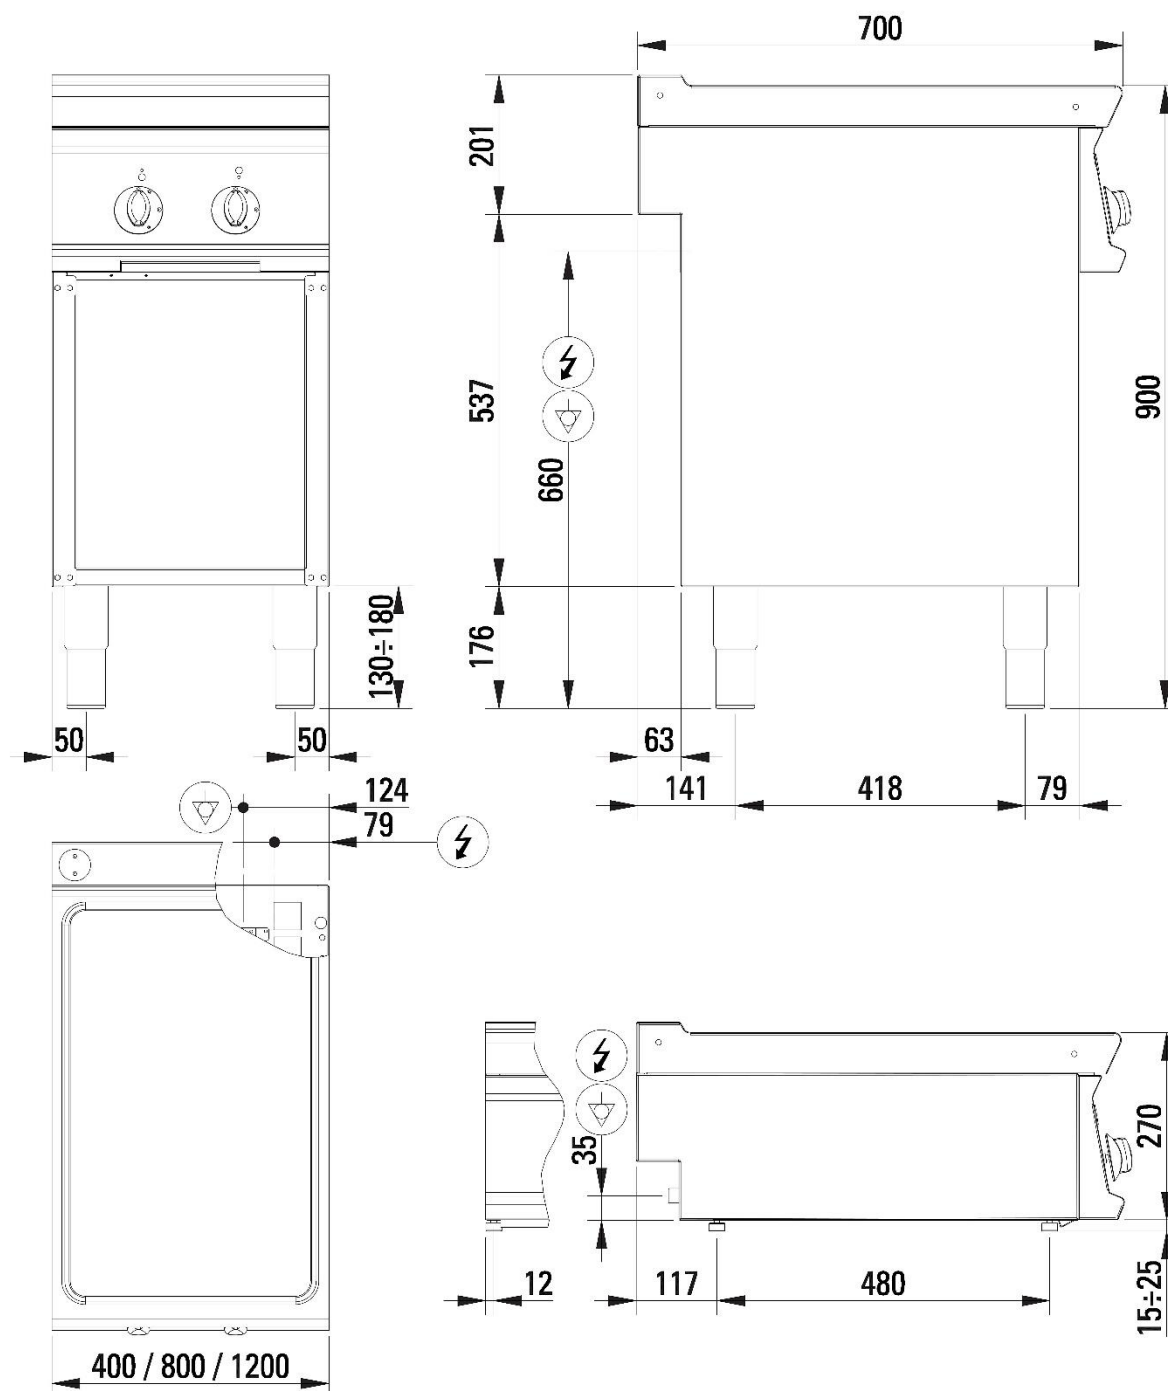


Fig.1 | Abb.1 | рис.1 - 5415.648.00