


716166

PIN4E7N

2-ZONE INDUCTION BOILING TOP (TOP VERSION)



- Induction boiling top (40 cm) with 2 independent cooking zones.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other boiling top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction cookware with a base diameter ranging between 12 cm and 28 cm.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.



TECHNICAL DATA

TOTAL POWER	7 kW	ELECTRIC POWER	7 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	2x3,5 n°- kW	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	4 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
CAMPO_0079	0001	ELECTRICAL CONNECTION HEIGHT (H)	35 mm
ELECTRICAL CONNECTION HEIGHT (X)	361 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	55 cm	NET WEIGHT	28,6 kg
GROSS WEIGHT	33 kg	VOLUME	0,2000 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	196.0 W
SENSIBLE HEAT RELEASE	490.0 W	STEAM RELEASE	287.0 g/h

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

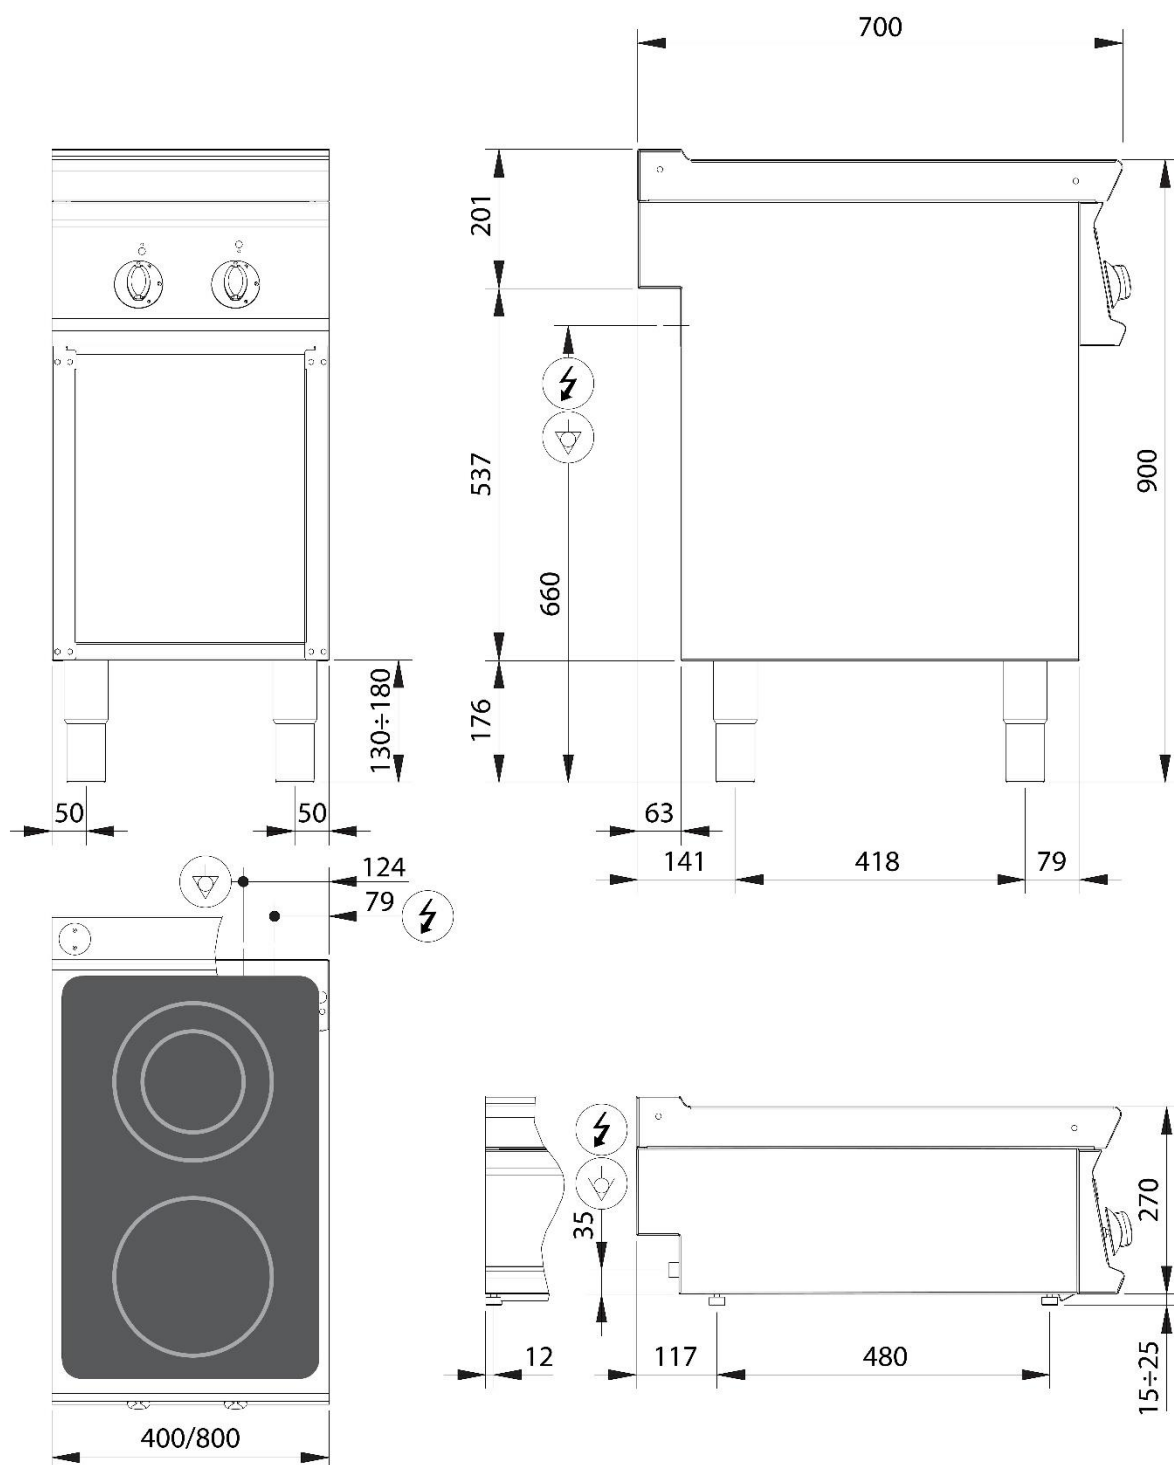


Fig.1 | Abb.1 | рис.1 - 5415.650.00