


716193

PFC8E7

ELECTRIC GLASS CERAMIC BOILING TOP ON GN2/1 ELECTRIC STATIC OVEN WITH 1 GRID



- Glass ceramic electric cooker (80 cm) with 4 independent zones on a GN 2/1 electric static oven.
- Glass ceramic top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent zone.
- Energy regulator 0-6-infinite.
- Temperature limiter to prevent overheating.
- Heating and control commands specific for each zone.
- Lights warning when the heating zones are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 ELECTRIC STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Heating through upper and lower heating elements that can be activated together or separately.

>> Thermostatic control 60-270°C.

>> Stainless steel removable side tray racks.

>> 1 grid supplied.

• AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.

• AISI 304 stainless steel control panel and side panels.

• Technical compartment to facilitate connection to the electrical network.


TECHNICAL DATA

| | | | |
|----------------------------------|----------------------|-----------------------------------|----------------------------|
| TOTAL POWER | 13,9 kW | ELECTRIC POWER | 13,9 kW |
| FREQUENCY | 50/60 Hz | VOLTAGE | 400 3N ~ V |
| OVEN POWER | 5,3 kW | BOILING TOP POWER | 8,6 kW |
| COOKING ZONE POWER | 2x2,5 + 2x1,8 n°- kW | TRAY CAPACITY | n° 4xGN2/1 |
| COOKING CHAMBER DIMENSIONS | 57,5x65x30 cm | OVEN DIMENSIONS | GN2/1 |
| 2-ZONE HEATING ELEMENTS | n° 2 | GUIDES | n° 4 |
| NUMBER OF COOKING ZONES | n° 4 | VERTICAL DISTANCE BETWEEN TRAYS | 6 cm |
| OVEN TEMPERATURE RANGE | 60÷270 °C | MINIMUM POWER CABLE CROSS-SECTION | 5 x 4 n° - mm ² |
| ELECTRIC CABLE TYPE | H07 RN-F | OVEN TYPE | Static |
| HEATING ZONES | n° 4 | ELECTRICAL CONNECTION HEIGHT (H) | 0 mm |
| ELECTRICAL CONNECTION HEIGHT (X) | 650 mm | ELECTRICAL CONNECTION HEIGHT (Y) | -580 mm |
| FOOT HEIGHT | 155 mm | FOOT ADJUSTMENT | 155/250 mm |
| IPX RATING | 4 | WIDTH | 80 cm |
| DEPTH | 70 cm | HEIGHT | 90 cm |
| PACKAGE WIDTH | 86 cm | PACKAGE DEPTH | 81 cm |
| PACKAGE HEIGHT | 115 cm | NET WEIGHT | 78,5 kg |
| GROSS WEIGHT | 98,5 kg | VOLUME | 0,80 m ³ |
| HARMONISED CODE | 84198180 | LATENT HEAT RELEASE | 1112.0 W |
| SENSIBLE HEAT RELEASE | 2780.0 W | STEAM RELEASE | 1640.2 g/h |

ACCESSORIES

| | |
|--------|----------------------------------------------------------------|
| 220590 | EXTRA OVEN GRID GN2/1 (53X63CM) |
| 399516 | ADJUSTABLE WATER TAP |
| 619012 | GN2/1 INOX TRAY |
| 719005 | TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM) |
| 799503 | SIDE COVERING PANEL FOR FREESTANDING MODULE |
| 799506 | PAIR OF CLOSING ELEMENTS (L=70CM) |

INSTALLATION SCHEMES

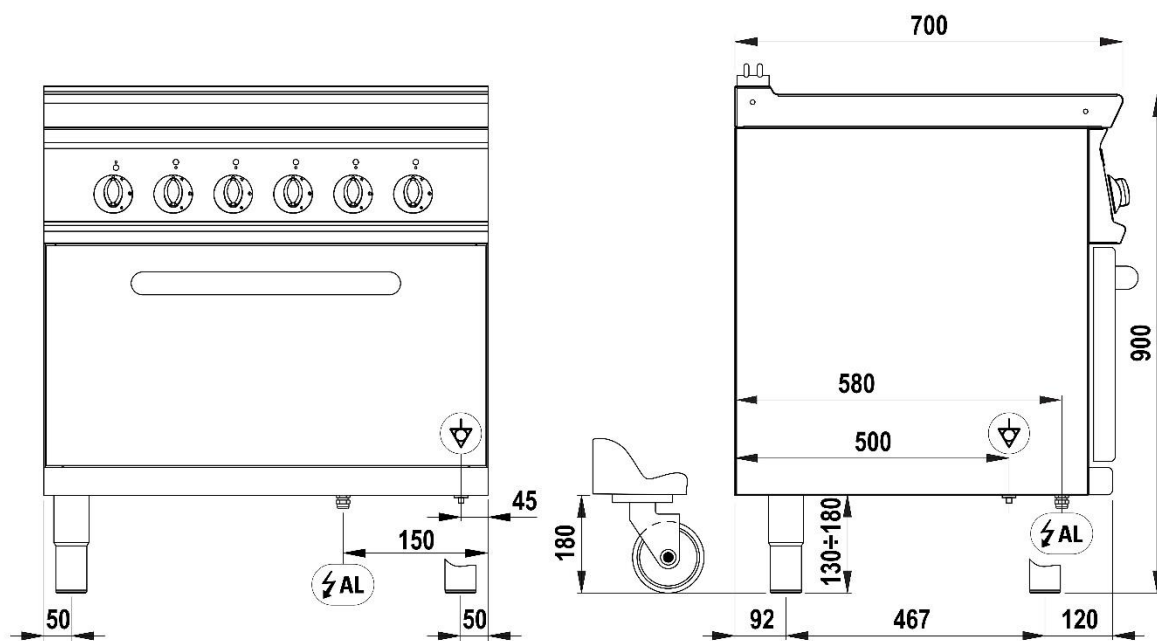

PFC8E7

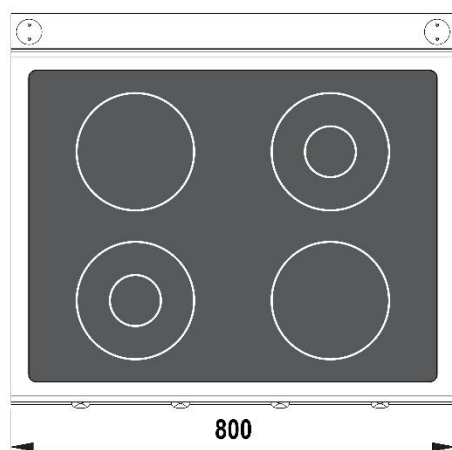


Fig.1 | Abb.1 | рис.1 - 5415.660.00