

716203

FTC12E7

ELECTRIC GRIDDLE WITH CHROME-PLATED SMOOTH PLATE (TOP VERSION)



- Electric griddle (120 cm), top version, with a mirror-polished chrome-plated, smooth plate recommended for cooking delicate products.
- The cooking plate, recessed and hermetically welded to the worktop, allows you to cook large quantities of different foods.
- Sloped cooking plate (15 mm thick) to facilitate the drainage of grease and liquids.
- 3 independent cooking zones.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- Height-adjustable (15/25 mm) rubbered plastic feet.
- Scraper included.
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.

TECHNICAL DATA

| | | | |
|----------------------------------|------------------------|-----------------------------------|------------------------------|
| TOTAL POWER | 11,7 kW | ELECTRIC POWER | 11,7 kW |
| FREQUENCY | 50/60 Hz | VOLTAGE | 380-415 3N~ V |
| TEMPERATURE RANGE | 60÷270 °C | MINIMUM POWER CABLE CROSS-SECTION | 5 x 2,5 n° - mm ² |
| COOKING SURFACE | 113x56 cm | ELECTRIC CABLE TYPE | H07 RN-F |
| PLATE TYPE | Chrome-plated - smooth | HEATING ZONES | n° 3 |
| ELECTRICAL CONNECTION HEIGHT (H) | 35 mm | ELECTRICAL CONNECTION HEIGHT (X) | 721 mm |
| ELECTRICAL CONNECTION HEIGHT (Y) | -63 mm | FOOT HEIGHT | 15 mm |
| FOOT ADJUSTMENT | 15/25 mm | IPX RATING | 4 |
| WIDTH | 120 cm | DEPTH | 70 cm |
| HEIGHT | 28 cm | PACKAGE WIDTH | 127 cm |
| PACKAGE DEPTH | 79 cm | PACKAGE HEIGHT | 54 cm |
| NET WEIGHT | 123 kg | GROSS WEIGHT | 132 kg |
| VOLUME | 0,55 m ³ | HARMONISED CODE | 84198180 |
| LATENT HEAT RELEASE | 4680.0 W | SENSIBLE HEAT RELEASE | 3861.0 W |
| STEAM RELEASE | 6879.6 g/h | | |

ACCESSORIES

| | |
|--------|------------------------------------|
| 120595 | GRIDDLE-CLEANING SCRAPER |
| 120597 | SCRAPER - SPARE BLADE KIT (10 PCS) |
| 719040 | SIDE HEAT PROTECTION DEVICE |
| 799506 | PAIR OF CLOSING ELEMENTS (L=70CM) |

INSTALLATION SCHEMES

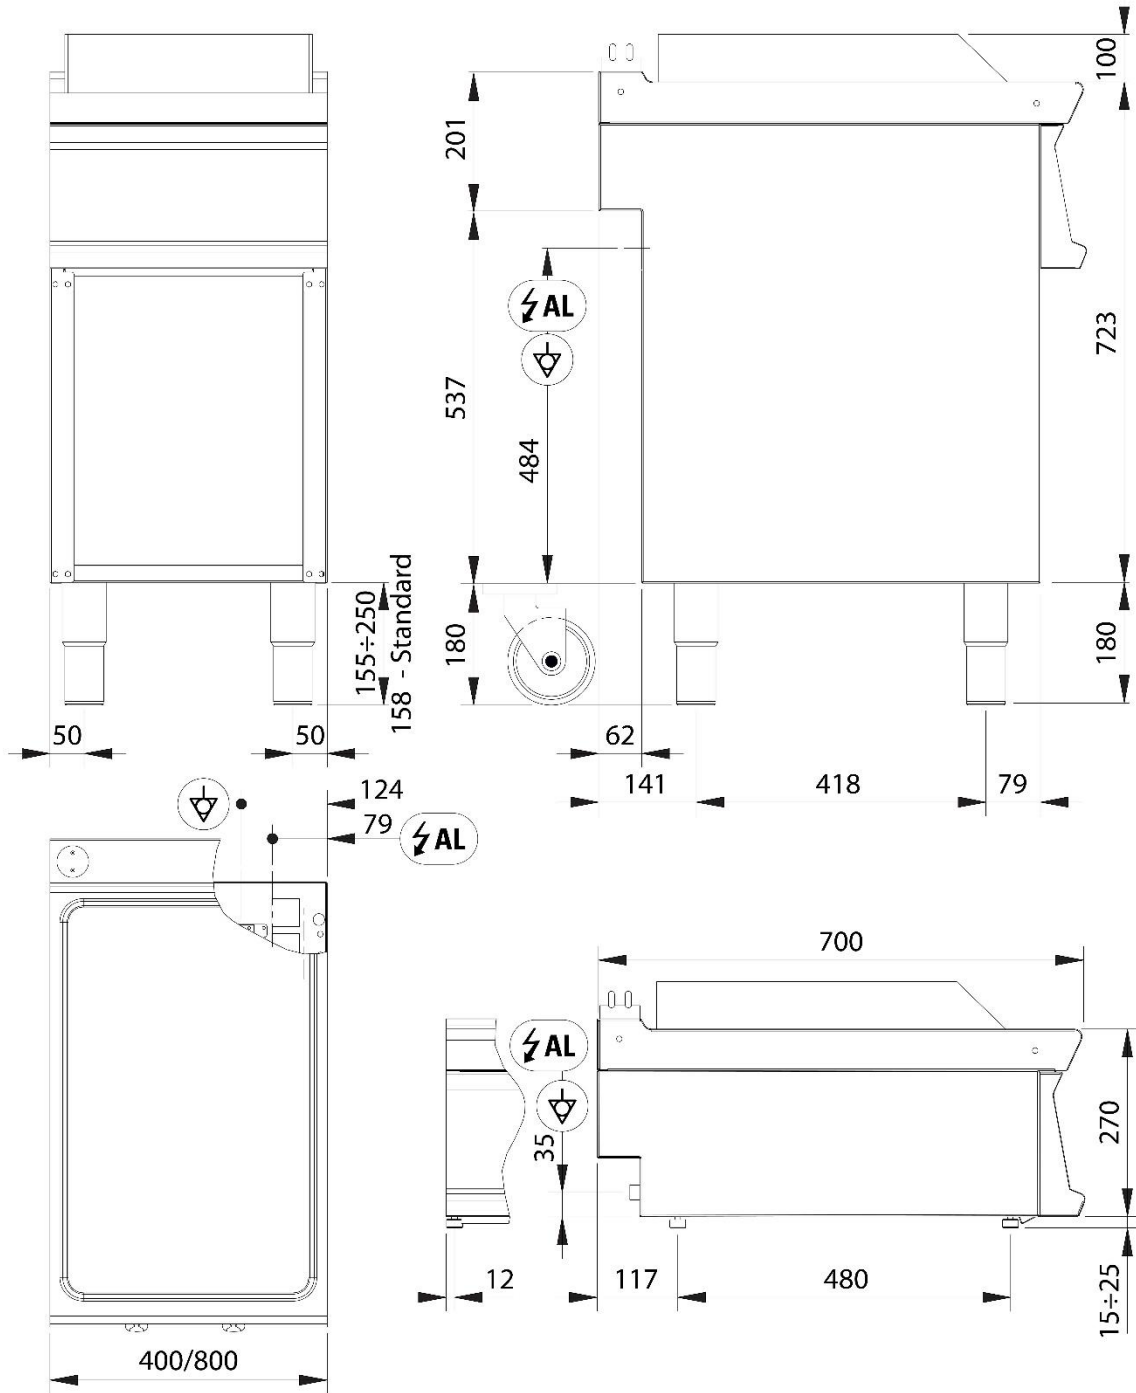


Fig.1 | Abb.1 | рис.1 - 5415.654.00