

716208

FTC12FF7

FREESTANDING ELECTRIC GRIDDLE WITH CHROME-PLATED SMOOTH PLATE ON OPEN CABINET



- Freestanding electric griddle on an open cabinet (120 cm) with a mirror-polished chrome-plated, smooth plate recommended for cooking delicate products.
- The cooking plate, recessed and hermetically welded to the worktop, allows you to cook large quantities of different foods.
- Sloped cooking plate (15 mm thick) to facilitate the drainage of grease and liquids.
- 3 independent cooking zones.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- Scraper included.
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- \bullet Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.



TECHNICAL DATA			
TOTAL POWER	11,7 kW	ELECTRIC POWER	11,7 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	60÷270 °C	CABINET DIMENSIONS	113x57,4x39,5 cm
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm²	COOKING SURFACE	113x56 cm
ELECTRIC CABLE TYPE	H07 RN-F	PLATE TYPE	Chrome-plated - smooth
HEATING ZONES	n° 3	ELECTRICAL CONNECTION HEIGHT (H)	660 mm
ELECTRICAL CONNECTION HEIGHT (X)	1121 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	125 cm	PACKAGE DEPTH	82,0 cm
PACKAGE HEIGHT	112 cm	NET WEIGHT	137 kg
GROSS WEIGHT	150 kg	VOLUME	1,13 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	4680.0 W
SENSIBLE HEAT RELEASE	3861.0 W	STEAM RELEASE	6879.6 g/h

ACCESSORIES

120595 GRIDDLE-CLEANING SCRAPER 120597 SCRAPER - SPARE BLADE KIT (10 PCS) 719040 SIDE HEAT PROTECTION DEVICE 799506 PAIR OF CLOSING ELEMENTS (L=70CM)



INSTALLATION SCHEMES

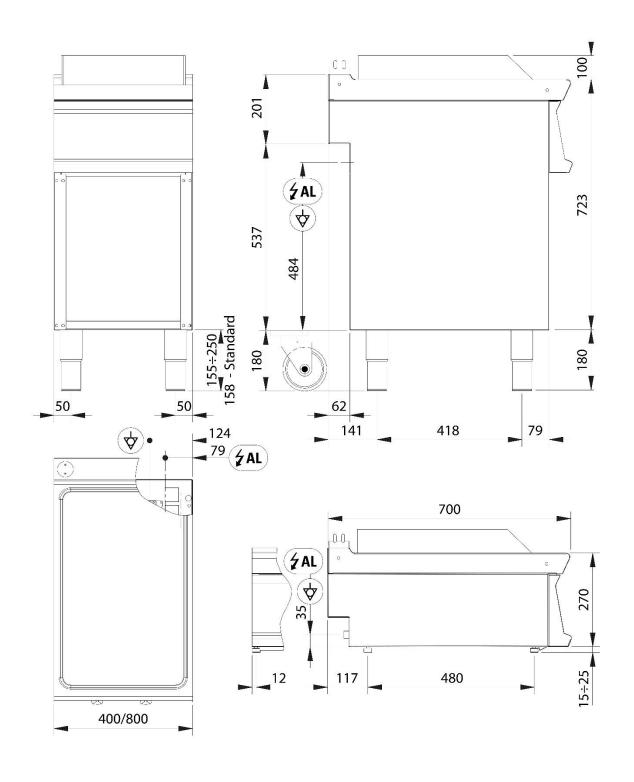


Fig.1 | Abb.1 | рис.1 - 5415.654.00