

716214

FTL8E7

## ELECTRIC GRIDDLE WITH SMOOTH PLATE (TOP VERSION)



- Electric griddle (80 cm), top version, with a smooth steel plate.
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Sloped cooking plate (12 mm thick) to facilitate the drainage of grease and liquids.
- 2 independent cooking zones.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- $\bullet$  Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.



| TECHNICAL DATA                      |                     |                                      |                  |
|-------------------------------------|---------------------|--------------------------------------|------------------|
| TOTAL POWER                         | 7,8 kW              | ELECTRIC POWER                       | 7,8 kW           |
| FREQUENCY                           | 50/60 Hz            | VOLTAGE                              | 380-415 3N~ V    |
| TEMPERATURE RANGE                   | 50÷320 °C           | MINIMUM POWER CABLE<br>CROSS-SECTION | 5 x 1,5 n° - mm² |
| COOKING SURFACE                     | 74,8x56,4 cm        | ELECTRIC CABLE TYPE                  | H07 RN-F         |
| PLATE TYPE                          | Smooth              | HEATING ZONES                        | n° 2             |
| ELECTRICAL CONNECTION<br>HEIGHT (H) | 35 mm               | ELECTRICAL CONNECTION<br>HEIGHT (X)  | 721 mm           |
| ELECTRICAL CONNECTION<br>HEIGHT (Y) | -63 mm              | FOOT HEIGHT                          | 15 mm            |
| FOOT ADJUSTMENT                     | 15/25 mm            | IPX RATING                           | 4                |
| WIDTH                               | 80 cm               | DEPTH                                | 70 cm            |
| HEIGHT                              | 28 cm               | PACKAGE WIDTH                        | 85 cm            |
| PACKAGE DEPTH                       | 79 cm               | PACKAGE HEIGHT                       | 54 cm            |
| NET WEIGHT                          | 75,2000 kg          | GROSS WEIGHT                         | 84,0000 kg       |
| VOLUME                              | 0,36 m <sup>3</sup> | HARMONISED CODE                      | 84198180         |
| LATENT HEAT RELEASE                 | 3120.0 W            | SENSIBLE HEAT RELEASE                | 2574.0 W         |
| STEAM RELEASE                       | 4586.4 g/h          |                                      |                  |

## **ACCESSORIES**

120595 GRIDDLE-CLEANING SCRAPER 120597 SCRAPER - SPARE BLADE KIT (10 PCS) 719040 SIDE HEAT PROTECTION DEVICE 799506 PAIR OF CLOSING ELEMENTS (L=70CM)



## **INSTALLATION SCHEMES**

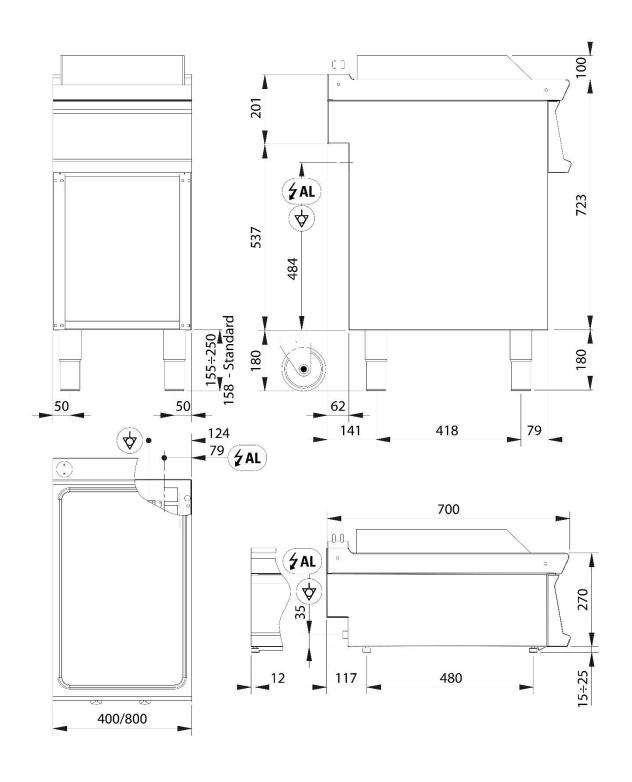


Fig.1 | Abb.1 | рис.1 - 5415.654.00