

716217

FTC8E7

## ELECTRIC GRIDDLE WITH CHROME-PLATED SMOOTH PLATE (TOP VERSION)



- Electric griddle (80 cm), top version, with a mirror-polished chromeplated, smooth cooking plate recommended for cooking delicate foods
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Sloped cooking plate (12 mm thick) to facilitate the drainage of grease and liquids.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- 2 independent cooking zones.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Scraper included.
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- $\bullet$  Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.



TECHNICAL DATA			
TOTAL POWER	7,8 kW	ELECTRIC POWER	7,8 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	50÷320 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²
COOKING SURFACE	74,8x56,4 cm	ELECTRIC CABLE TYPE	H07 RN-F
PLATE TYPE	Chrome-plated - smooth	HEATING ZONES	n° 2
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	721 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	86 cm
PACKAGE DEPTH	80 cm	PACKAGE HEIGHT	54 cm
NET WEIGHT	76,2000 kg	GROSS WEIGHT	86,4 kg
VOLUME	0,37 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	3120.0 W	SENSIBLE HEAT RELEASE	2574.0 W
STEAM RELEASE	4586.4 g/h		

## **ACCESSORIES**

120595 GRIDDLE-CLEANING SCRAPER 120597 SCRAPER - SPARE BLADE KIT (10 PCS) 719040 SIDE HEAT PROTECTION DEVICE 799506 PAIR OF CLOSING ELEMENTS (L=70CM)



## **INSTALLATION SCHEMES**

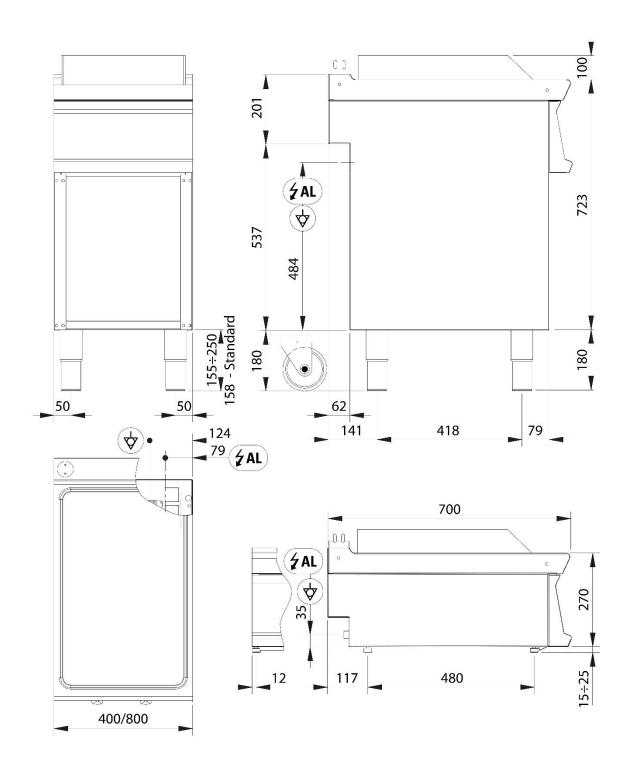


Fig.1 | Abb.1 | рис.1 - 5415.654.00