

716234

FTRR8BFE7

FREESTANDING ELECTRIC GRIDDLE WITH BRUSHED, CHROME-PLATED, RIBBED PLATE ON OPEN CABINET



- Freestanding electric griddle on an open cabinet (80 cm) with a brushed chrome-plated, ribbed cooking plate to cook a variety of products: from meat to fish and vegetables.
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Sloped cooking plate (12 mm thick) to facilitate the drainage of grease and liquids.
- The anti-scratch cooking plate ensures resistance to scratches and corrosion, while the striping enhances product grilling.
- •The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- The chrome-plated surface ensures less energy consumption and heat dispersion.
- 2 independent cooking zones.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- \bullet Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.

HEIGHT (X)

FOOT HEIGHT

PACKAGE WIDTH

PACKAGE HEIGHT

HARMONISED CODE

SENSIBLE HEAT RELEASE

GROSS WEIGHT

IPX RATING

DEPTH



155/250 mm

80 cm

90 cm

81 cm

0,80 m³

3120.0 W

4586.4 g/h

82,5000 kg

TECHNICAL DATA			
TOTAL POWER	7,8 kW	ELECTRIC POWER	7,8 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	50÷320 °C	CABINET DIMENSIONS	73x57,4x39,5 cm
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²	COOKING SURFACE	74,8x56,4 cm
ELECTRIC CABLE TYPE	H07 RN-F	PLATE TYPE	Brushed chrome-plated - ribbed
HEATING ZONES	n° 2	ELECTRICAL CONNECTION HEIGHT (H)	660 mm
ELECTRICAL CONNECTION	721 mm	ELECTRICAL CONNECTION	-63 mm

HEIGHT (Y)

WIDTH

HEIGHT

FOOT ADJUSTMENT

PACKAGE DEPTH

STEAM RELEASE

LATENT HEAT RELEASE

NET WEIGHT

VOLUME

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - SPARE BLADE KIT (10 PCS)

319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90 719005 TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)

719040 SIDE HEAT PROTECTION DEVICE

799503 SIDE COVERING PANEL FOR FREESTANDING MODULE

155 mm

70 cm

87 cm

114,0 cm

84198180

2574.0 W

102 kg

4

799506 PAIR OF CLOSING ELEMENTS (L=70CM)



INSTALLATION SCHEMES

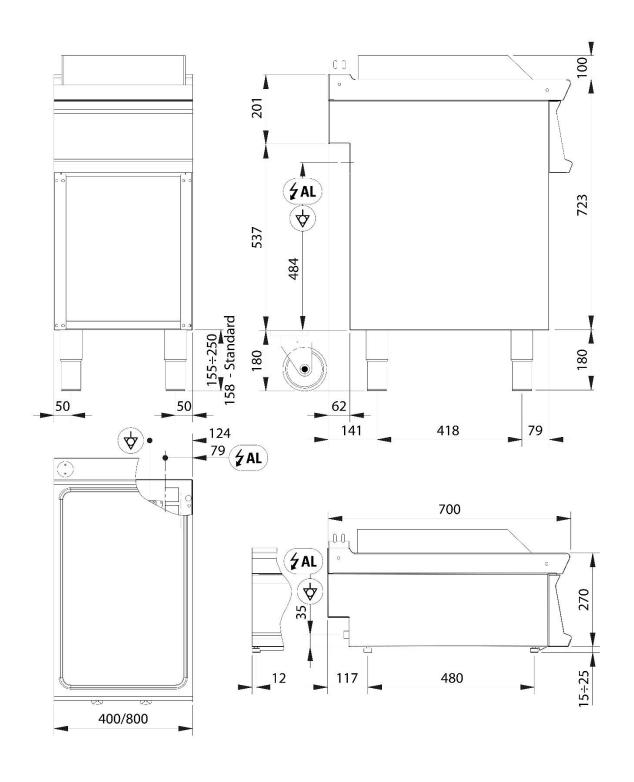


Fig.1 | Abb.1 | рис.1 - 5415.654.00