

954352

GOM10TSL

## TECNOCOMBI NEXT GAS COMBI STEAMER WITH 10 TRAYS GN1/1, TOUCH SCREEN, PROGRAMMABLE RECIPES, AUTOMATIC WASHING AND DIRECT STEAM



- 10-tray GN 1/1 gas combi steamer, Touch control screen, with direct steam and atmospheric burners.
- Deep drawn and hermetically welded cooking chamber.
- Cooking chamber lighting through LEDs in the door.
- Cooking chamber made of AISI 304 stainless steel (1 mm thick) featuring rounded corners to prevent dirt buildups. The polished steel finish improves heat refraction, reduces steel roughness, and prevents corrosion from chemicals, allowing easy removal of food residues.
- AISI 304 watertight door with high-performance and easily replaceable gasket and 2 glass panes: the outer pane is 4 mm thick and the inner pane is 6 mm thick with a thermal reflective treatment for enhanced energy efficiency. Air tunnel in the door for operator safety.
- Anti-slip and anti-fingerprint handle with right/left opening.
- The interface is as user-friendly as a smartphone, thanks to a 7-inch capacitive touch display.
- The cooking parameters are easily visible at a glance, thanks to the automatic distance display mode.
- The 8 cooking cycles help save energy and obtain excellent results.
- The professional fans are governed by an inverter, work with 4 speeds and stop instantly when rotation is reversed and the door is opened.
- In the mixed cycle you can manage up to 19 humidity levels at 5% intervals from 0% to 90%.
- Programmable steam puff up to 20 seconds, enhancing humidity levels in the cooking chamber during convection mode.
- Up to 300 cooking programs, including both uploaded and chef-created ones.
- Multifood technology for cooking several foods simultaneously.
- Automatic self-cleaning including 4 cycles, with the longest lasting only 62 minutes.
- Multipoint core probe with 4 detection points included.
- Cloud platform for controlling recipes and ovens easily.
- HACCP and consumption data recording.


## TECHNICAL DATA

TOTAL POWER	19 + 0,5 kW	GAS POWER	19 kW
ELECTRIC POWER	0,5 kW	FREQUENCY	50/60 Hz
VOLTAGE	220-240 ~ V	MOTOR FAN ELECTRIC POWER	0,5 kW
TRAY CAPACITY	n° 10xGN1/1	MAXIMUM FOOD LOAD	50 Kg
NATURAL GAS CONSUMPTION	2,01 m³/h	LPG CONSUMPTION	1.5 m³/h
COOKING CHAMBER DIMENSIONS	0053 cm	GUIDES	n° 10
VERTICAL DISTANCE BETWEEN TRAYS	6,5 cm	MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm²
THERMAL INSULATION THICKNESS	35 mm	STEAM CYCLE TEMPERATURE	50÷120 °C
MIXED CYCLE TEMPERATURE	50÷250 °C	CONVECTION CYCLE TEMPERATURE	50÷265 °C
TIMER	0-540 min	ELECTRIC CABLE TYPE	H07 RN-F
OVEN TYPE	Digital - GN1/1 tray	FAN SPEED	4
CE GAS CERTIFICATE NUMBER	CE-0085CP0593	WATER CONNECTION POSITION	4cm
WATER DRAIN POSITION	4cm	ELECTRICAL CONNECTION HEIGHT (H)	41 mm
ELECTRICAL CONNECTION HEIGHT (X)	155 mm	ELECTRICAL CONNECTION HEIGHT (Y)	0 mm
GAS CONNECTION HEIGHT (H)	126 mm	GAS CONNECTION HEIGHT (X)	27 mm
GAS CONNECTION HEIGHT (Y)	0 mm	WATER CONNECTION DIAMETER	3/4"
WATER CONNECTION HEIGHT (H)	126 mm	WATER CONNECTION HEIGHT (X)	185 mm
WATER CONNECTION HEIGHT (Y)	0 mm	SOFTEN WATER CONNECTION HEIGHT (H)	126 mm
SOFTEN WATER CONNECTION HEIGHT (X)	125 mm	SOFTEN WATER CONNECTION HEIGHT (Y)	0 mm
DRAIN DIAMETER	1,9685"	DRAIN CONNECTION HEIGHT (H)	38 mm
DRAIN CONNECTION HEIGHT (X)	65 mm	DRAIN CONNECTION HEIGHT (Y)	67 mm
FOOT HEIGHT	65 mm	FOOT ADJUSTMENT	65/75 mm
IPX RATING	4	WIDTH	86 cm
DEPTH	72 cm	HEIGHT	102 cm
PACKAGE WIDTH	93 cm	PACKAGE DEPTH	85 cm
PACKAGE HEIGHT	126 cm	NET WEIGHT	129 kg
GROSS WEIGHT	143,2 kg	VOLUME	0,99 m³
HARMONISED CODE	84198180	NOMINAL THERMAL POWER	19 kW
LATENT HEAT RELEASE	3420.0 W	SENSIBLE HEAT RELEASE	2850.0 W
STEAM RELEASE	5035.0 g/h		

## ACCESSORIES

091910	GN1/1 STAINLESS STEEL BAKING GRID FOR POULTRY	091946	STAINLESS STEEL MESH BASKET FOR PRE-FRIED FOOD
091947	TEFLON-COATED ALUMINIUM SPECIAL GRID FOR VEGETABLES	091949	STAINLESS STEEL BAKING GRID FOR SKEWERS
091950	ALUMINIUM TEFLON-COATED SPECIAL GRID FOR MEAT AND FISH	091951	ALUMINIUM TEFLON COATED TRAY FOR EGGS AND OMELETTES
091952	ALUMINIUM SMOOTH TEFLON-COATED TRAY H=20MM	091953	ALUMINIUM SMOOTH TEFLON-COATED TRAY H=40MM
091954	ALUMINIUM SMOOTH TEFLON-COATED TRAY H 65MM	9032	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=20MM
9033	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=40MM	9034	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=65MM
9055	GN1/1 STAINLESS STEEL BAKING GRID	9056	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=20MM
9057	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=40MM	9058	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=65MM
9059	GN1/1 ENAMELLED BACKING TRAY H=20MM	9060	GN1/1 ENAMELLED BACKING TRAY H=40MM
9061	GN1/1 ENAMELLED BACKING TRAY H=65MM	951912	EXTERNAL SPRAY GUN
951915	ALKALINE DETERGENT TANK (10LT) FOR OVENS	951917	ALUMINIUM TRAY WITH HEAT RETENTION FOR PIZZA (GN1/1)
951933	ALUMINIUM SMOOTH TEFLON COATED TRAY WITH HEAT RETENTION	951934	ALUMINIUM RIBBED TEFLON COATED TRAY WITH HEAT RETENTION
951935	DRAUGHT DIVERTER FOR TECNOCOMBI GAS OVENS	951938	CLOSED CABINET WITH SIDE RUNNERS AND DETERGENT TANK SUPPORT FOR GN1/1 OVENS - 7 TRAYS CROSSWISE
951939	HOT CLOSED CABINET, SIDE RUNNERS FOR GN 1/1 OVENS - 7 TRAYS CROSSWISE	951950	NEEDLE CORE PROBE FOR VACUUM COOKING
951953	TEFLON COATED ALUMINIUM TRAY GN1/1	951954	PERFORATED TEFLON COATED ALUMINIUM TRAY GN1/1
951961	PIPING KIT FOR WATER INLET AND OUTLET	951972	COVERING PANEL FOR TECNOCOMBI OVENS WITH EXHAUST HOOD ON BASE, CABINET, HOT CABINET OR HUMIFIED CABINET
951974	BASE FOR 6 AND 10 GN1/1 TRAY TECNOCOMBI OVENS	951976	BASE WITH SIDE RUNNERS FOR 6 AND 10 GN1/1 TRAYS TECNOCOMBI OVENS
951981	STACKING ELEMENT FOR 6 AND 10 GN1/1 TRAY TECNOCOMBI OVENS ON 5-TRAY BLAST FREEZERS	951983	WHEELS KIT FOR OVENS BASE

INSTALLATION SCHEMES

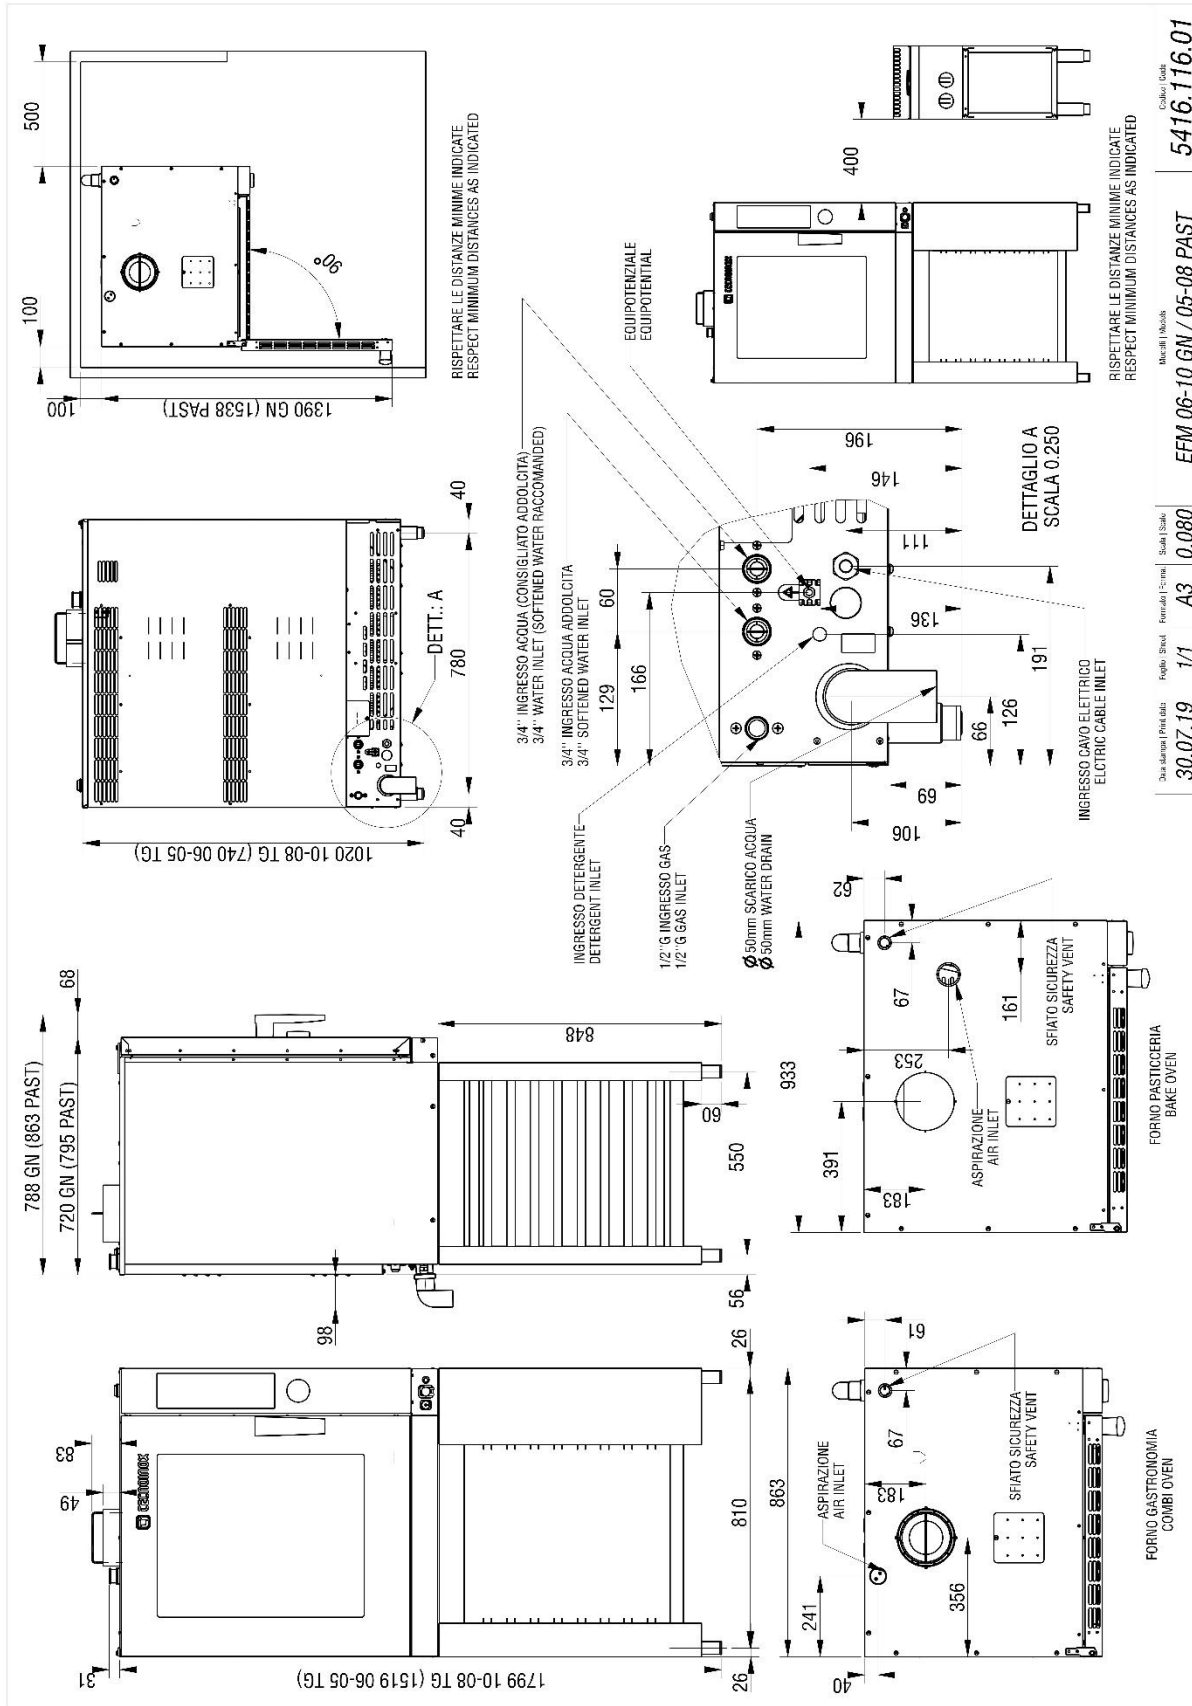

Data Stampa / Print Date: **30.07.19**    Foglio / Sheet: **1/1**    Formato / Format: **A3**    Scala / Scale: **0.080**    Macchina / Model: **EFM 06-10 GN / 05-08 PAST**    Collo / Code: **5416.116.01**