

962342

GOP08D

D SERIES TECNOBAKE GAS COMBI STEAMER (PASTRY VERSION) WITH 8 TRAYS (600X400MM), ELECTRONIC CONTROL, PROGRAMMABLE RECIPES AND DIRECT STEAM



- 8-tray pastry gas digital combi steamer (60x40 cm) with direct steam and atmospheric burners.
- Cooking chamber made of AISI 304 stainless steel (1 mm thick) featuring rounded corners to prevent dirt buildups. The polished steel finish improves heat refraction, reduces steel roughness, and prevents corrosion from chemicals, allowing easy removal of food residues.
- AISI 304 watertight door with high-performance and easily replaceable gasket and 2 glass panes: the outer pane is 4 mm thick and the inner pane is 6 mm thick with a thermal reflective treatment for enhanced energy efficiency. Air tunnel in the door for operator safety.
- Anti-slip and anti-fingerprint handle with right/left opening.
- The capacitive touch buttons and push & scroll dial speed up the selection and confirmation procedures.

The control panels are equipped with:

- two alphanumeric displays: one for temperature control and one for time or the temperature detected by the core probe;
- a high-visibility colour LCD-TFT display, ensuring optimal visualisation of recipes and 8 energy-efficient cooking cycles for excellent end results.
- The professional fans are governed by an inverter, work with 4 speeds and stop instantly when rotation is reversed and the door is opened.
- In the mixed cycle you can manage up to 19 humidity levels at 5% intervals from 0% to 90%.
- The play button lights up in different colours to show the status of the oven.
- Programmable steam puff up to 20 seconds, enhancing humidity levels in the cooking chamber during convection mode.
- Larger vent (6 cm diameter) for improved humidity control.
- Up to 300 cooking programs, including both uploaded and chef-created ones.
- Cloud platform for controlling recipes and ovens easily.


TECHNICAL DATA

TOTAL POWER	19 + 0,5 kW	GAS POWER	19 kW
ELECTRIC POWER	0,5 kW	FREQUENCY	50/60 Hz
VOLTAGE	220-240 ~ V	MOTOR FAN ELECTRIC POWER	0,5 kW
TRAY CAPACITY	n° 8x(600x400)	NATURAL GAS CONSUMPTION	2,01 m³/h
LPG CONSUMPTION	1.5 m³/h	COOKING CHAMBER DIMENSIONS	66x45x77 cm
GUIDES	n° 8	VERTICAL DISTANCE BETWEEN TRAYS	9 cm
MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm²	THERMAL INSULATION THICKNESS	35 mm
STEAM CYCLE TEMPERATURE	50÷120 °C	MIXED CYCLE TEMPERATURE	50÷250 °C
CONVECTION CYCLE TEMPERATURE	50÷265 °C	TIMER	0-540 min
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Digital - tray 400 x 600 mm
FAN SPEED	4	CE GAS CERTIFICATE NUMBER	CE-0085CP0593
WATER CONNECTION POSITION	4cm	WATER DRAIN POSITION	4cm
ELECTRICAL CONNECTION HEIGHT (H)	41 mm	ELECTRICAL CONNECTION HEIGHT (X)	155 mm
ELECTRICAL CONNECTION HEIGHT (Y)	0 mm	GAS CONNECTION HEIGHT (H)	126 mm
GAS CONNECTION HEIGHT (X)	27 mm	GAS CONNECTION HEIGHT (Y)	0 mm
WATER CONNECTION DIAMETER	3/4"	WATER CONNECTION HEIGHT (H)	126 mm
WATER CONNECTION HEIGHT (X)	185 mm	WATER CONNECTION HEIGHT (Y)	0 mm
SOFTEN WATER CONNECTION HEIGHT (H)	126 mm	SOFTEN WATER CONNECTION HEIGHT (X)	125 mm
SOFTEN WATER CONNECTION HEIGHT (Y)	0 mm	DRAIN DIAMETER	1,9685"
DRAIN CONNECTION HEIGHT (H)	38 mm	DRAIN CONNECTION HEIGHT (X)	65 mm
DRAIN CONNECTION HEIGHT (Y)	67 mm	FOOT HEIGHT	65 mm
FOOT ADJUSTMENT	65/75 mm	IPX RATING	4
WIDTH	93 cm	DEPTH	78,5 cm
HEIGHT	102 cm	PACKAGE WIDTH	100 cm
PACKAGE DEPTH	93 cm	PACKAGE HEIGHT	128 cm
NET WEIGHT	125 kg	GROSS WEIGHT	152,5 kg
VOLUME	1,19 m³	HARMONISED CODE	84198180
NOMINAL THERMAL POWER	19 kW	LATENT HEAT RELEASE	3420.0 W
SENSIBLE HEAT RELEASE	2850.0 W	STEAM RELEASE	5035.0 g/h

ACCESSORIES

9037	CHROME-PLATED GRID (600X400MM)	9041	SMOOTH ALUMINIUM TRAY 600X400 H=20MM
9045	PERFORATED ALUMINIUM TRAY 600X400 H=65MM	9046	ALUMINIUM BAGUETTES BAKING TRAY
951912	EXTERNAL SPRAY GUN	951915	ALKALINE DETERGENT TANK (10LT) FOR OVENS
951935	DRAUGHT DIVERTER FOR TECNOCOMBI GAS OVENS	951950	NEEDLE CORE PROBE FOR VACUUM COOKING
951961	PIPING KIT FOR WATER INLET AND OUTLET	951983	WHEELS KIT FOR OVENS BASE
961910	ALUMINIUM TRAY WITH HEAT RETENTION FOR PIZZA (600X400 MM)	961937	CLOSED CABINET WITH SIDE RUNNERS AND DETERGENT TANK SUPPORT FOR PASTRY OVENS
961938	CROSSWISE HUMIDIFIED (WATER INJECTION) CABINET WITH GLASS DOORS, 14 TRAYS (600X400MM)	961939	LENGTHWISE HUMIDIFIED (WATER INJECTION) CABINET WITH GLASS DOORS, 14 TRAYS (600X400MM)
961950	TEFLON COATED ALUMINIUM TRAY (600X400MM)	961951	TEFLON COATED ALUMINIUM PERFORATED TRAY (600X400MM)
961971	CONDENSATE EXHAUST HOOD TECNOBAKE OVENS WITH 5 AND 8 TRAYS OR TECNODUAL OVENS WITH 6 AND 10 TRAYS, 220-240V, 50/60HZ, 0.25KW MOTOR	961972	COVERING PANEL FOR A 5-TRAY TECNOBAKE OR TECNODUAL OVEN WITH EXHAUST HOOD ON HOT OR NEUTRAL CLOSED, HUMIDIFIED CABINET OR BASE
961973	BASES FOR 5 AND 8-TRAY TECNOBAKE OVENS OR 6 OR 10-TRAY TECNODUAL OVENS	961974	BASE UNIT WITH SIDE RUNNERS FOR TECNOBAKE OVENS WITH 5 AND 8 TRAYS

INSTALLATION SCHEMES

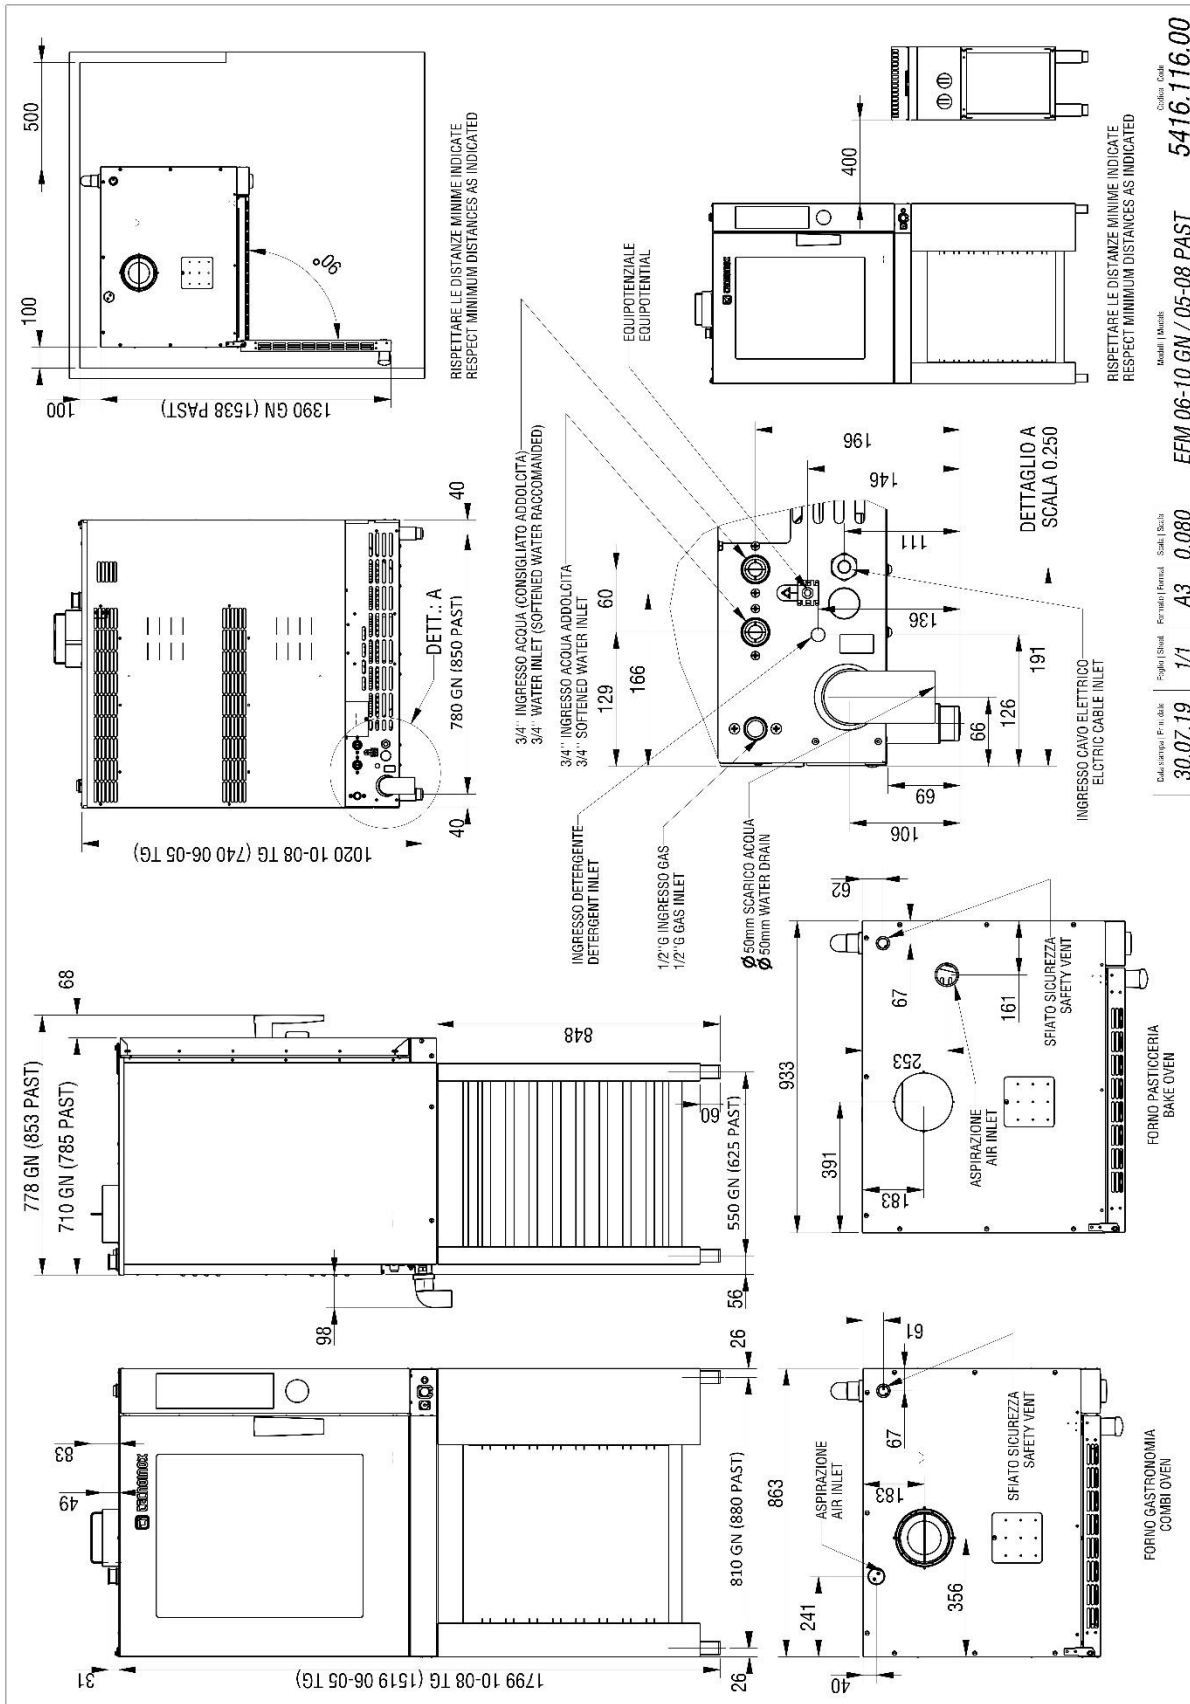

30.07.19 1/1 A3 0.080 EFM 06-10 GN / 05-08 PAST 5416.116.00

Dati tecnici F.r. in d.lla Foglio Sheet F.r. in d.lla Fornero Form. Scat. 18/24
 Modelli / Models
 Codice Code