

316039

PF12E9

ELECTRIC COOKER WITH 6 SQUARED HERMETIC PLATES (30X30CM - 11.8X11.8 IN) ON GN2/1 ELECTRIC STATIC OVEN WITH 1 GRID



- Electric cooker with 6 squared plates on a GN 2/1 electric static oven (80 cm) and a cabinet with a door (40 cm).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron squared electric plates (30x30) hermetically fixed to the deep drawn worktop..
- 4 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are ignited.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 ELECTRIC STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.


>> Heating through upper and lower heating elements that can be activated together or separately.

>> Thermostatic control 60-270°C.

>> Stainless steel removable side tray racks.

>> 1 grid included.

- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the electrical network.

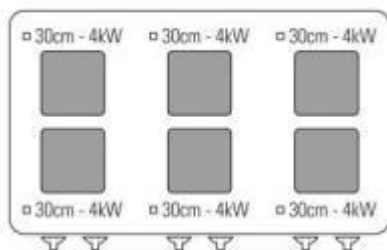

TECHNICAL DATA

TOTAL POWER	29,3 kW	ELECTRIC POWER	29,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
OVEN POWER	5,3 kW	BOILING TOP POWER	24 kW
COOKING ZONE POWER	6x4 n°- kW	TRAY CAPACITY	n° 4xGN2/1
COOKING CHAMBER DIMENSIONS	57,5x65x30 cm	OVEN DIMENSIONS	GN2/1
ELECTRIC PLATE DIMENSIONS	30x30 cm	CABINET DIMENSIONS	33x76,1x39,5 cm
GUIDES	n° 4	NUMBER OF COOKING ZONES	n° 6
VERTICAL DISTANCE BETWEEN TRAYS	6 cm	OVEN TEMPERATURE RANGE	60÷270 °C
MINIMUM POWER CABLE CROSS-SECTION	5 x 10 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
OVEN TYPE	Static	ELECTRICAL CONNECTION HEIGHT (H)	484 mm
ELECTRICAL CONNECTION HEIGHT (X)	1129 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	133 mm	FOOT ADJUSTMENT	133/195 mm
IPX RATING	4	WIDTH	120 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	126,0 cm	PACKAGE DEPTH	100,0 cm
PACKAGE HEIGHT	116,0 cm	NET WEIGHT	143 kg
GROSS WEIGHT	165 kg	VOLUME	1,46 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	2344.0 W
SENSIBLE HEAT RELEASE	5860.0 W	STEAM RELEASE	3457.4 g/h

ACCESSORIES

220590	EXTRA OVEN GRID GN2/1 (53X63CM)
319011	REAR COVERING PANEL FOR CABINET (L=120CM)
399516	ADJUSTABLE WATER TAP
399532	TOP FRAME FOR 2 PLATES
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES



Fig.1 | Abb.1 | pvc.1 - 5415.561.00