


616120

PFC70E7

ELECTRIC GLASS CERAMIC BOILING TOP ON GN2/1 ELECTRIC STATIC OVEN WITH 1 GRID



- Glass ceramic electric cooker (70 cm) with 4 independent cooking zones on a GN 2/1 electric static oven.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent area.
- Energy regulator 0-6-infinite.
- Temperature limiter to prevent overheating.
- Heating commands and separated controls for each area by means of a thermostat.
- Lights warning when the heating areas are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 ELECTRIC STATIC OVEN

>> Stainless steel oven door and cooking chamber.

>> Long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Heating through upper and lower heating elements that can be enabled together or individually.

>> Thermostatic control 60-270°C.

>> Stainless steel removable side tray racks.

- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	13,9 kW	ELECTRIC POWER	13,9 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
OVEN POWER	5,3 kW	BOILING TOP POWER	8,6 kW
COOKING ZONE POWER	2x2,5 + 2x1,8 n°- kW	TRAY CAPACITY	n° 4xGN2/1
COOKING CHAMBER DIMENSIONS	57,5x65x30 cm	OVEN DIMENSIONS	GN2/1
2-ZONE HEATING ELEMENTS	n° 2	GUIDES	n° 4
NUMBER OF COOKING ZONES	n° 4	VERTICAL DISTANCE BETWEEN TRAYS	6 cm
OVEN TEMPERATURE RANGE	60÷270 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Static
HEATING ZONES	n° 4	ELECTRICAL CONNECTION HEIGHT (H)	0 mm
ELECTRICAL CONNECTION HEIGHT (X)	618 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-516 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	85 cm
PACKAGE WIDTH	76,0 cm	PACKAGE DEPTH	80,0 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	71,0000 kg
GROSS WEIGHT	88,0000 kg	VOLUME	0,7000 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	1112.0 W
SENSIBLE HEAT RELEASE	2780.0 W	STEAM RELEASE	1640.2 g/h

ACCESSORIES

220585	JOINT
220590	EXTRA OVEN GRID GN2/1 (53X63CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES

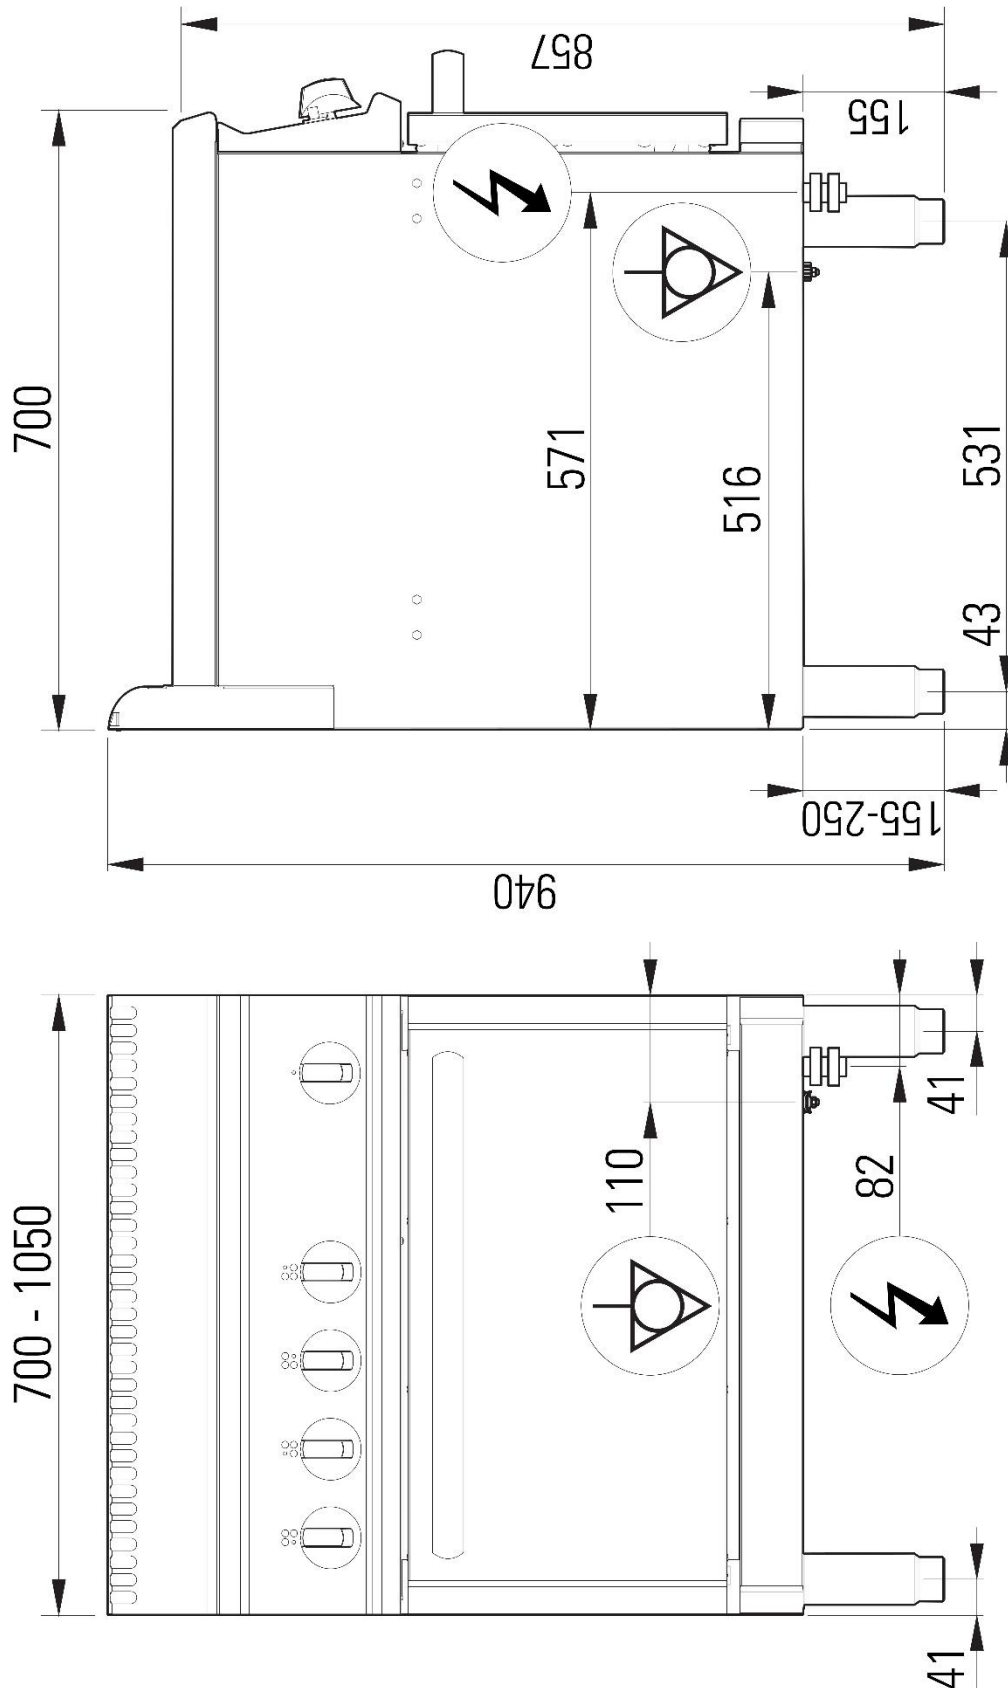


Fig.1 | Abb.1 | рис.1 - 5415.553.00