


113008

PF105G/6

6-BURNER GAS COOKER ON ELECTRIC CONVECTION OVEN WITH 1 GRID AND 1 TRAY

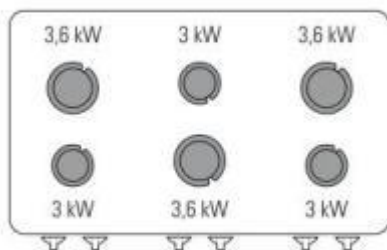

- 6-burner gas cooker on an electric convection oven (70 cm) and a cabinet with a door (35 cm).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Aluminium burners fixed to the worktop with a single ring (3.0 kW and 3.6 kW).
- Aluminium flame spreader with enamelled cast iron lid.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> ELECTRIC CONVECTION OVEN

- >> Enamelled cooking chamber (45x39.5x33.5 cm).
- >> Oven door with 2 tempered glass panes. Heat-reflecting inner glass.
- >> Removable silicone gasket.
- >> Heating via fan with heating element.
- >> Thermostatic control 0-275°C.
- >> 4 trays 440x365 mm.
- >> Timer 0-50 minutes.
- >> 1 grid and 1 tray included.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

TECHNICAL DATA

TOTAL POWER	19,8 + 2,5 kW	GAS POWER	19,8 kW
ELECTRIC POWER	2,5 kW	FREQUENCY	50/60 Hz
VOLTAGE	230 ~ V	OVEN POWER	2,5 kW
OPEN BURNER POWER	3x3 + 3x3,6 n°- kW	BOILING TOP POWER	19,8 kW
TRAY CAPACITY	n° 4x(440x380)	NATURAL GAS CONSUMPTION	2,09 m³/h
COOKING CHAMBER DIMENSIONS	46x41,5x32 cm	CABINET DIMENSIONS	36,5x57x42 cm
GUIDES	n° 4	NUMBER OF BURNERS	n° 6
VERTICAL DISTANCE BETWEEN TRAYS	1x8 + 2x5 cm	OVEN TEMPERATURE RANGE	0÷275 °C
MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm²	BOILING PAN SUPPORT	RAAF enamelled cast iron
TIMER	0-50 min	ELECTRIC CABLE TYPE	H07 RN-F
OVEN TYPE	Convection	CE GAS CERTIFICATE NUMBER	CE-0085AQ1145
GAS CONNECTION DIAMETER	1/2"G EN10226-1	IPX RATING	4
WIDTH	105 cm	DEPTH	60 cm
HEIGHT	85 cm	PACKAGE WIDTH	111 cm
PACKAGE DEPTH	75,0 cm	PACKAGE HEIGHT	115,0 cm
NET WEIGHT	70 kg	GROSS WEIGHT	89,4 kg
VOLUME	0,95 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.56 m³/h	LATENT HEAT RELEASE	2376.0 W
SENSIBLE HEAT RELEASE	5940.0 W	STEAM RELEASE	3484.8 g/h

ACCESSORIES

120585	JOINT FOR TECNO60, TECNO65
120655	PAN SUPPORT REDUCER
120667	BACK SPLASH GUARD L=1050MM

INSTALLATION SCHEMES

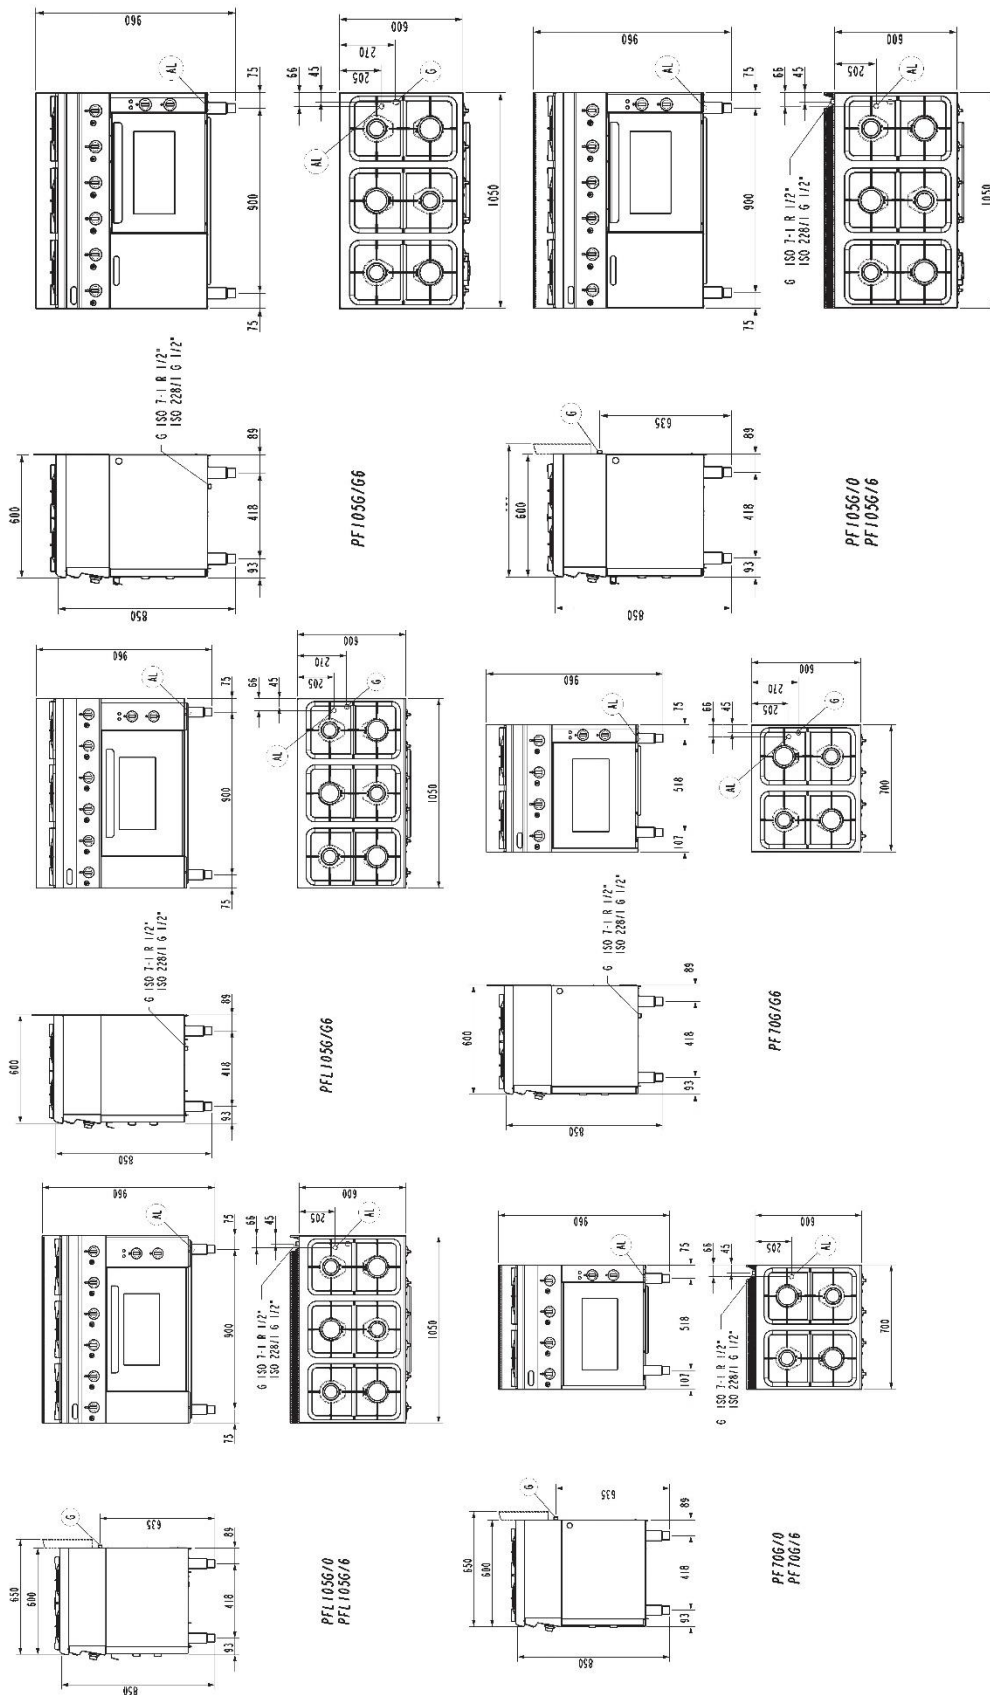


Fig.1 | Abb.1 | pvc.1 - 5415.671.00