


116002

PC35E/6/1

**ELECTRIC BOILING TOP WITH 2 HERMETIC ROUND
HOT PLATES (DIAM. 18CM - 7.1 IN, TOP VERSION)**



- Electric boiling top (35 cm top version) with 2 cast-iron, round plates (18 cm diameter).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.0 kW power for each plate adjustable to 6 levels.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Plastic feet (H=51 mm).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.



TECHNICAL DATA

TOTAL POWER	4 kW	ELECTRIC POWER	4 kW
FREQUENCY	50/60 Hz	VOLTAGE	230 ~ V
BOILING TOP POWER	4 kW	COOKING ZONE POWER	2x2 n°- kW
ELECTRIC PLATE DIMENSIONS	Ø 18 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	3 x 2,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	307 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-445 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	60 cm
HEIGHT	30 cm	PACKAGE WIDTH	71,0 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	9,2 kg	GROSS WEIGHT	14,2 kg
VOLUME	0,1500 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	320.0 W	SENSIBLE HEAT RELEASE	800.0 W
STEAM RELEASE	472.0 g/h		

ACCESSORIES

120585	JOINT FOR TECNO60, TECNO65
120665	TECNO60 SPLASHBACK L=350MM

INSTALLATION SCHEMES

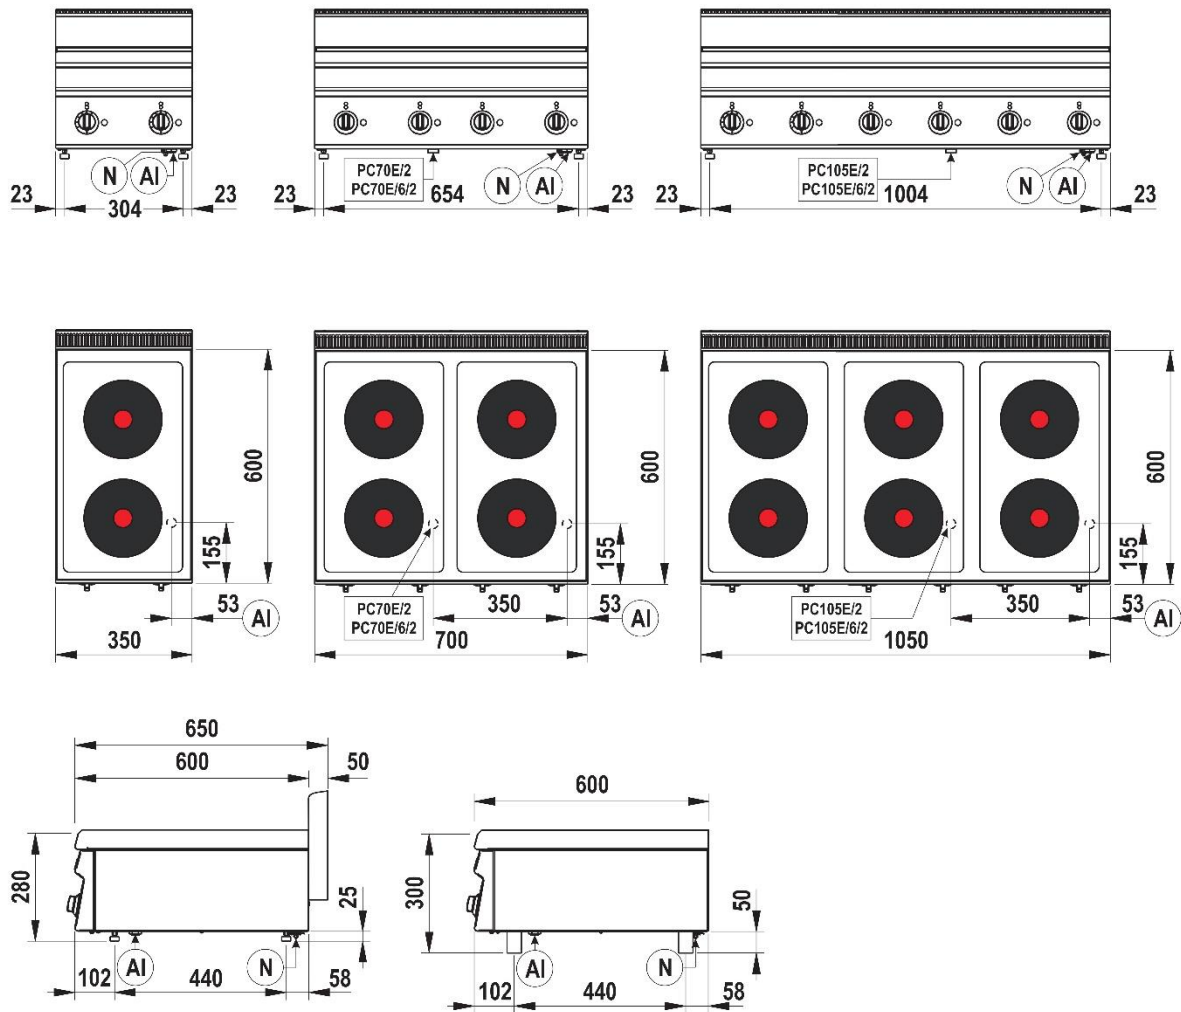


Fig.1 | Abb.1 | рис.1 - 5415.670.00