
116068**FTL70BE/6/2****ELECTRIC GRIDDLE WITH BRUSHED, CHROME-PLATED SMOOTH PLATE (TOP VERSION)**




- Electric griddle (70 cm top version) with a brushed, chrome-plated smooth cooking plate to cook a variety of products, from meat to fish and vegetables.
- Horizontal cooking plate (12 cm thick).
- One temperature control.
- Power: 6 kW.
- The anti-scratch cooking plate ensures resistance to scratches and corrosion, while the striping enhances product grilling.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- The chrome-plated surface ensures less energy consumption and heat dispersion.
- Scraper included.
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Appliances intended for direct cooking.
- Cooking plate hermetically sealed to the worktop.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Grooving with a cap and removable drawer for collecting grease and liquids.
- Removable splashback on 3 sides integrated into the worktop.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Plastic feet (H=51 mm).

TECHNICAL DATA

TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	220-240 ~ V
TEMPERATURE RANGE	50÷320 °C	MINIMUM POWER CABLE CROSS-SECTION	3 x 4 n° - mm ²
COOKING SURFACE	69,6x56,4 cm	ELECTRIC CABLE TYPE	H07 RN-F
PLATE TYPE	Brushed chrome-plated - smooth	HEATING ZONES	n° 1
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	647 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-445 mm	FOOT HEIGHT	51 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	60 cm	HEIGHT	30 cm
PACKAGE WIDTH	76,0 cm	PACKAGE DEPTH	71,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	47,5000 kg
GROSS WEIGHT	55,0000 kg	VOLUME	0,2900 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	2400.0 W
SENSIBLE HEAT RELEASE	1980.0 W	STEAM RELEASE	3528.0 g/h

ACCESSORIES

INSTALLATION SCHEMES

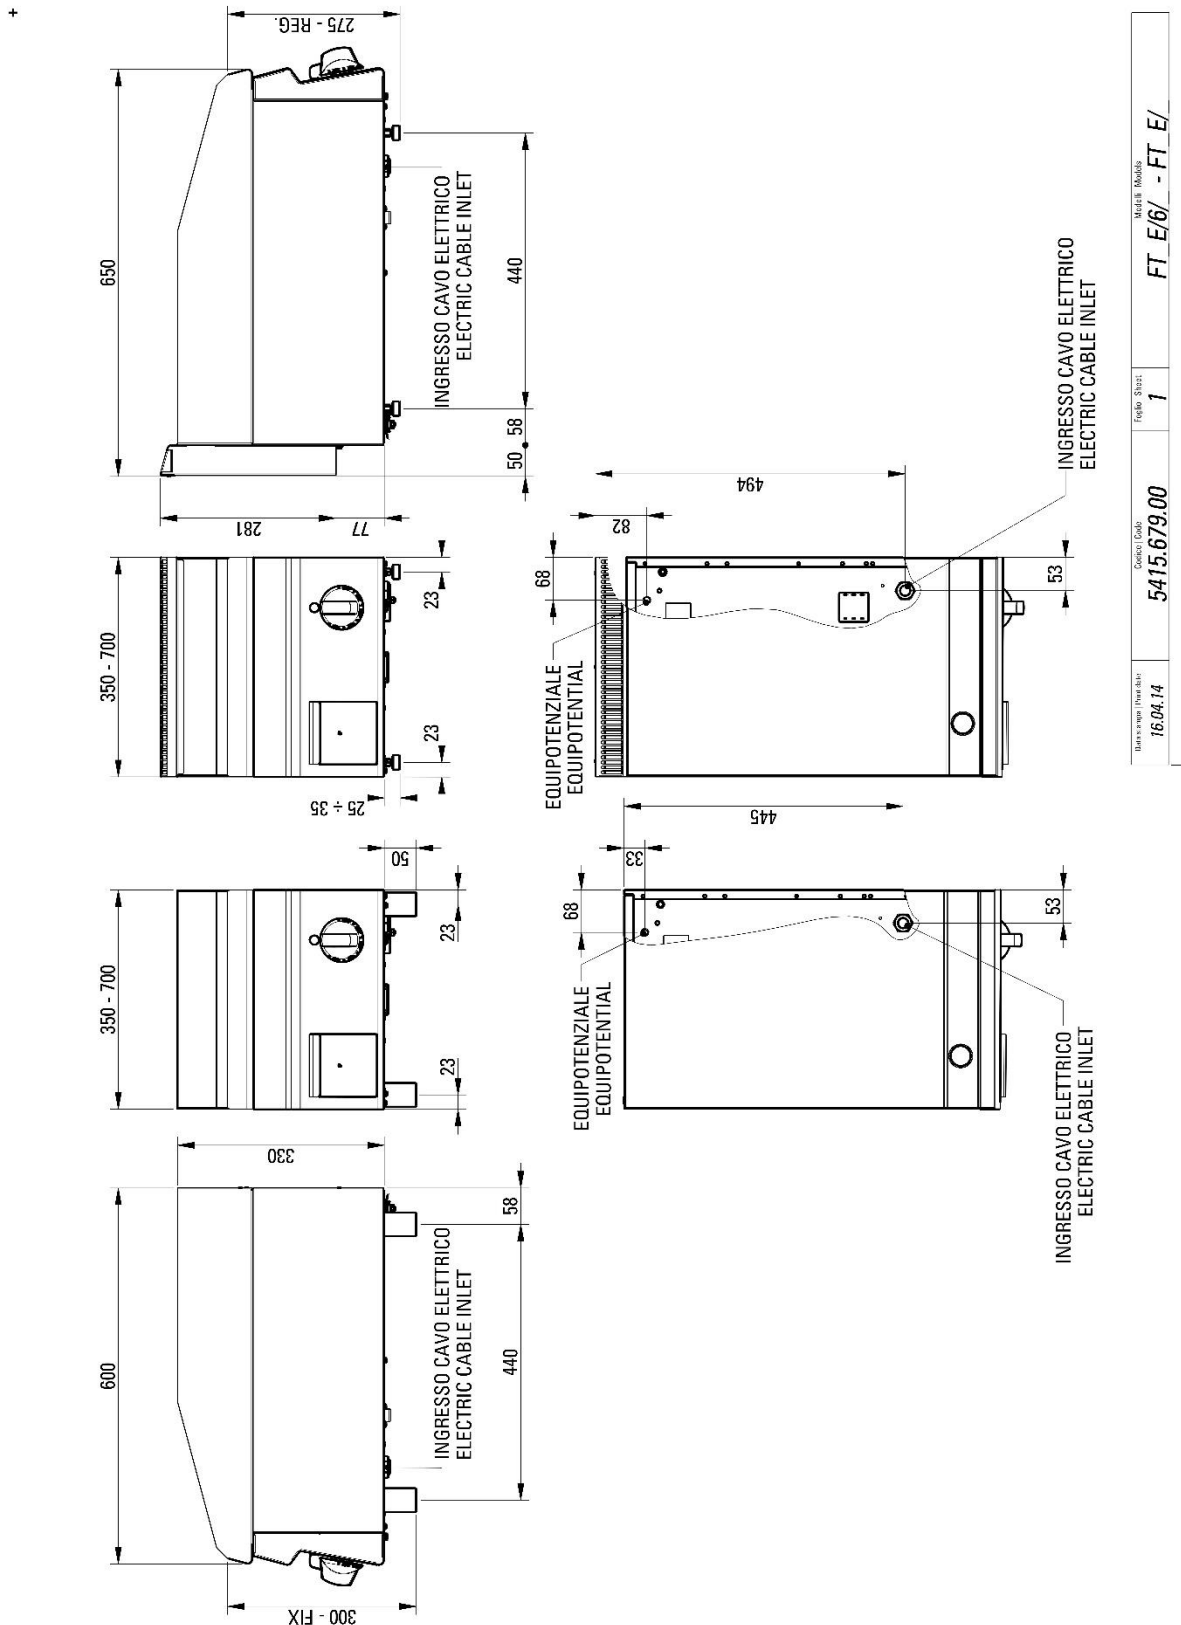

Drawing Code	16.04.14	Code	5415.679.00	Model	FT E/6/ - FT E/
Sheet	1				