

123028

FR70G/0

DOUBLE TANK 8+8L GAS FRYER WITH IN-TANK HEAT EXCHANGERS IN THE TANK - BASKETS AND LIDS INCLUDED



- Gas fryer (8+8 l, 70 cm top version) with 2 independent tanks.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 deep drawn tank with rounded corners seamlessly welded to an AISI 304 deep drawn worktop, Scotch Brite finish.
- Worktop with front area for oil and foam expansion.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- AISI 304 stainless steel round heat exchangers in the tank.
- Operating thermostatic valve with 7 adjustment levels. The valve's excellent reactivity prevents the oil temperature from dropping, ensuring a dry and crispy product on the outside and soft on the inside.
- Max. Temperature 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- Front drain with elbow extension included.
- Basket support on flue.
- Lid and basket included for each tank.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.


TECHNICAL DATA

TOTAL POWER	12,5 kW	GAS POWER	12,5 kW
TANK CAPACITY	8lt+8lt	NATURAL GAS CONSUMPTION	1,32 m³/h
TANK DIMENSIONS	22,5x34x22,5 cm	HEATING	Heat exchangers in the tank
TANK TYPE	AISI 304	TANKS	n° 2
CE GAS CERTIFICATE NUMBER	CE-0085BO0095	ELECTRICAL CONNECTION HEIGHT (H)	33 mm
ELECTRICAL CONNECTION HEIGHT (X)	655 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-50 mm
GAS CONNECTION DIAMETER	1/2"G EN10226-1	FOOT HEIGHT	25 mm
FOOT ADJUSTMENT	25/35 mm	WIDTH	70 cm
DEPTH	65 cm	HEIGHT	28 cm
PACKAGE WIDTH	75 cm	PACKAGE DEPTH	70 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	35,3 kg
GROSS WEIGHT	42,8 kg	VOLUME	0,2900 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	0.99 m³/h
LATENT HEAT RELEASE	8750.0 W	SENSIBLE HEAT RELEASE	1125.0 W
STEAM RELEASE	12875.0 g/h		

ACCESSORIES

- 120575 EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
- 120585 JOINT FOR TECNO60, TECNO65
- 120690 2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)

INSTALLATION SCHEMES

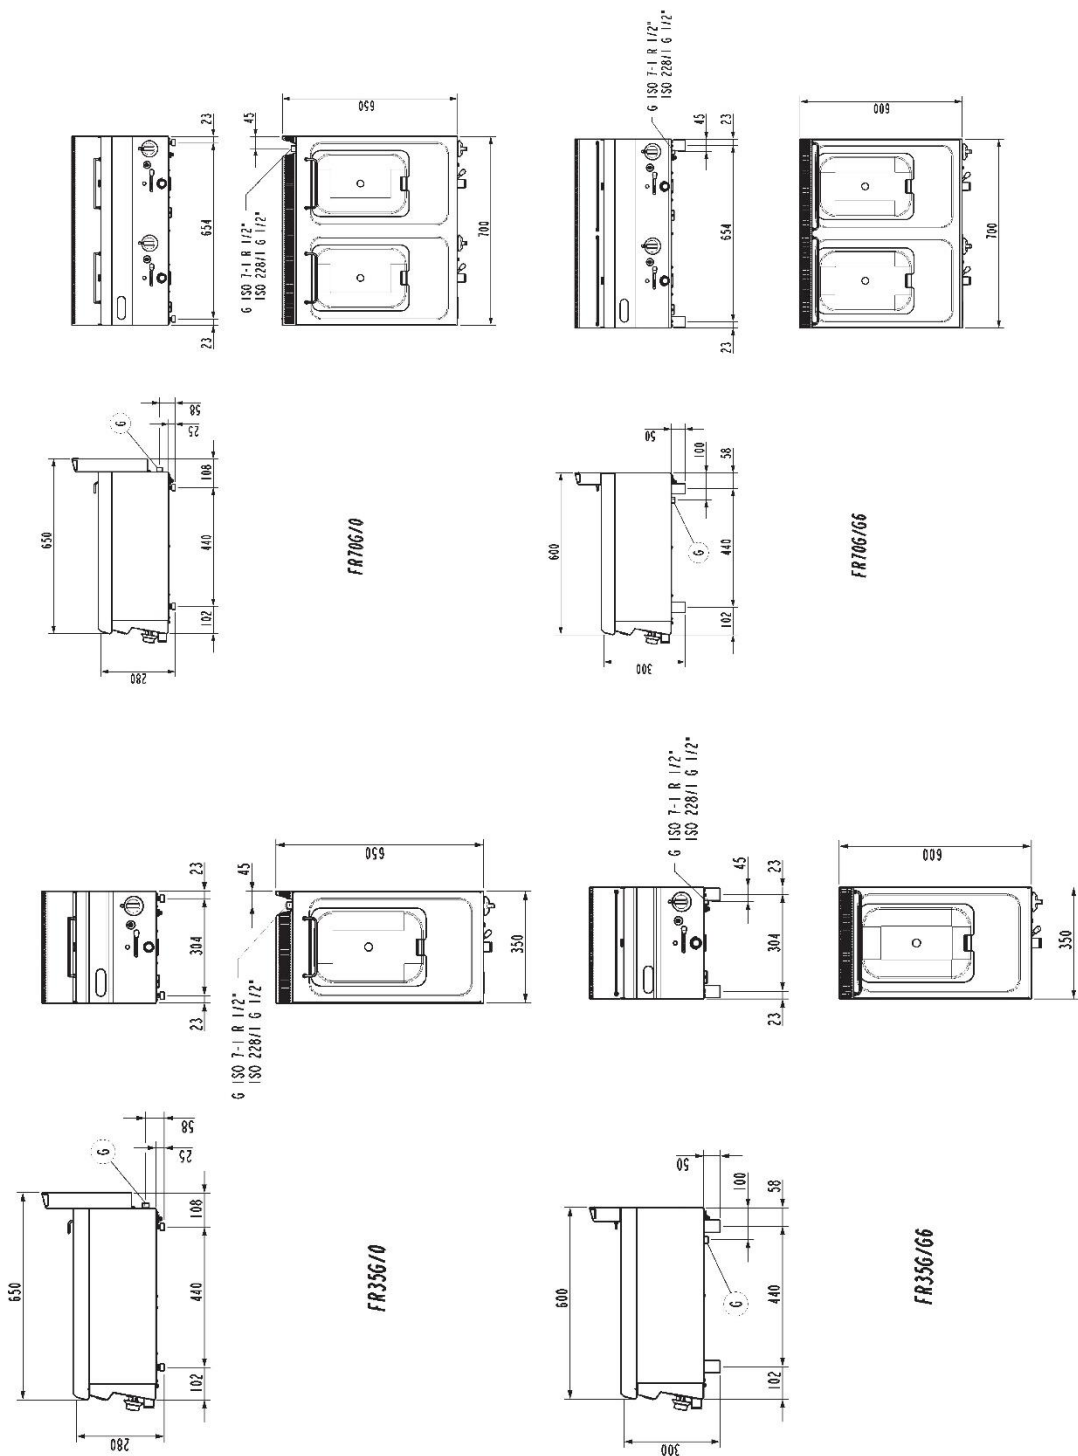

G 1/2" ISO 228-1 - G 1/2" EN 10226-1 = Attacco gas | Gas inlet connection | Gasanschluss | Подсоединение газ | Arrivie gaz | Entrada gas.

Fig.1 | Abb.1 | рис.1 - 5415.682.00