


---

**126001**

PC35E/0

**ELECTRIC BOILING TOP WITH 2 HERMETIC ROUND  
HOT PLATES (DIAM. 18CM - 7.1 IN, TOP VERSION)**

---



- Electric boiling top (35 cm top version) with 2 cast-iron, round plates (18 cm diameter).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.0 kW power for each plate adjustable to 6 levels.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Height-adjustable rubberised plastic feet (15-25 mm)
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.

## TECHNICAL DATA

TOTAL POWER	4 kW	ELECTRIC POWER	4 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	4 kW	COOKING ZONE POWER	2x2 n°- kW
ELECTRIC PLATE DIMENSIONS	Ø 18 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	307 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-495 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	65 cm
HEIGHT	28 cm	PACKAGE WIDTH	71,0 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	10,6 kg	GROSS WEIGHT	15,6 kg
VOLUME	0,1500 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	320.0 W	SENSIBLE HEAT RELEASE	800.0 W
STEAM RELEASE	472.0 g/h		

## ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

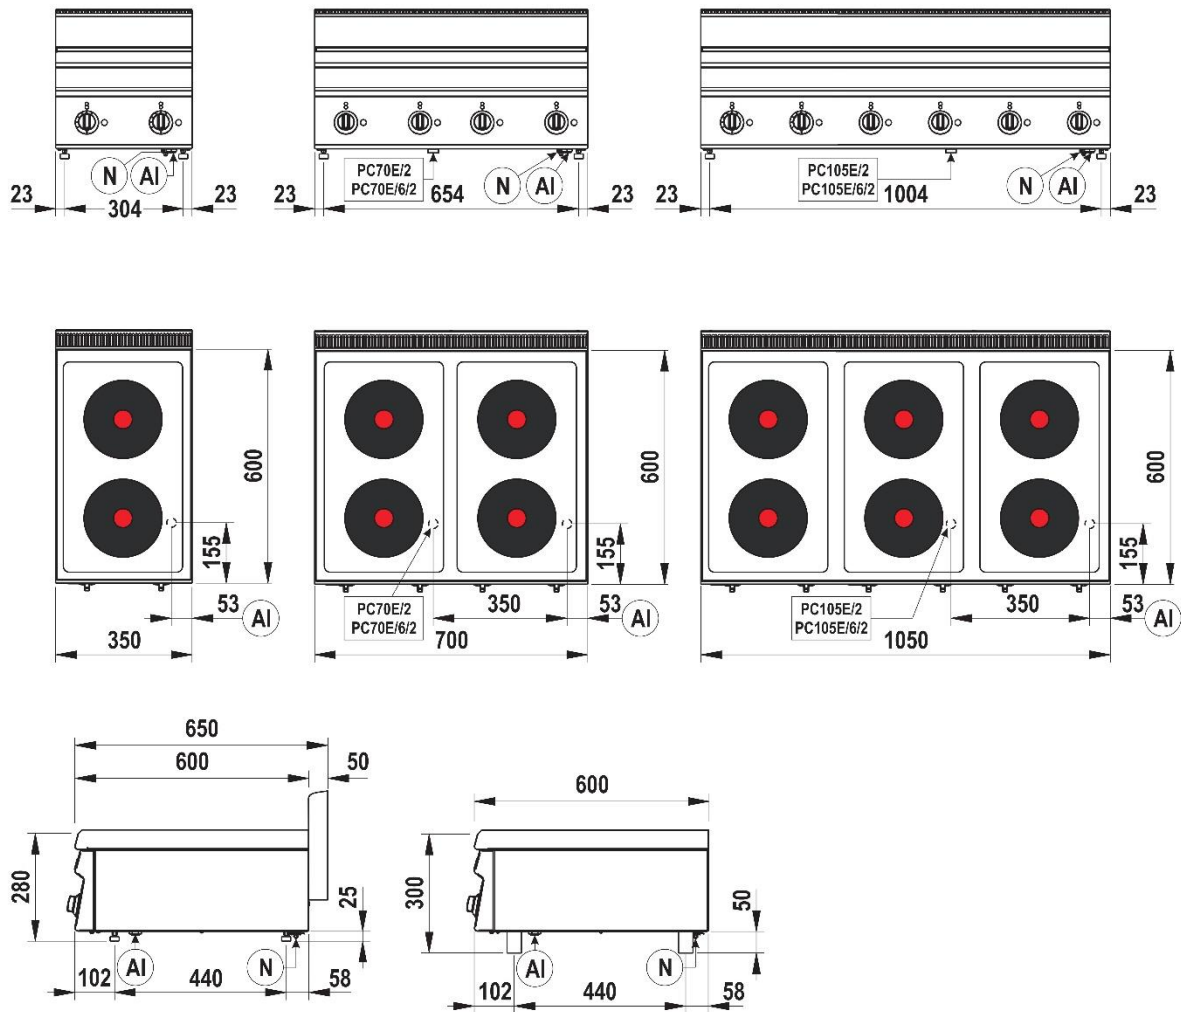


Fig.1 | Abb.1 | рис.1 - 5415.670.00