

126014

PFC70E/0

ELECTRIC COOKER WITH 4 HEATING ZONES ON ELECTRICAL CONVECTION OVEN WITH 1 GRID AND 1 TRAY



- Glass ceramic electric cooker (70 cm) with 4 independent cooking zones on an electric convection oven.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent area.
- Energy regulator 0-6-infinite.
- Separated heating commands and controls per plate.
- Lights warning when the heating areas are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> ELECTRIC CONVECTION OVEN

- >> Enamelled cooking chamber (45x39.5x33.5 cm).
- >> Oven door with 2 tempered glass panes. Heat-reflecting inner glass.
- >> Removable silicone gasket.
- >> Heating via fan with heating element.
- >> Thermostatic control 0-275°C.
- >> 4 trays 440x365 mm.
- >> Timer 0-50 minutes.
- >> 1 grid and 1 tray included.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

| | | | |
|-----------------------------------|------------------------------|-------------------------|----------------|
| TOTAL POWER | 11,1 kW | ELECTRIC POWER | 11,1 kW |
| FREQUENCY | 50/60 Hz | VOLTAGE | 400 3N ~ V |
| OVEN POWER | 2,5 kW | BOILING TOP POWER | 8,6 kW |
| COOKING ZONE POWER | 2x1,8 + 2x2,5 n°- kW | TRAY CAPACITY | n° 4x(440x380) |
| COOKING CHAMBER DIMENSIONS | 46x41,5x32 cm | 2-ZONE HEATING ELEMENTS | n° 2 |
| GUIDES | n° 4 | NUMBER OF COOKING ZONES | n° 4 |
| VERTICAL DISTANCE BETWEEN TRAYS | 1x8 + 2x5 cm | OVEN TEMPERATURE RANGE | 0÷275 °C |
| MINIMUM POWER CABLE CROSS-SECTION | 5 x 2,5 n° - mm ² | TIMER | 0-50 min |
| ELECTRIC CABLE TYPE | H07 RN-F | OVEN TYPE | Convection |
| HEATING ZONES | n° 4 | IPX RATING | 4 |
| WIDTH | 70 cm | DEPTH | 65 cm |
| HEIGHT | 85 cm | PACKAGE WIDTH | 76 cm |
| PACKAGE DEPTH | 75 cm | PACKAGE HEIGHT | 117 cm |
| NET WEIGHT | 53 kg | GROSS WEIGHT | 68 kg |
| VOLUME | 0,67 m ³ | HARMONISED CODE | 84198180 |
| LATENT HEAT RELEASE | 888.0 W | SENSIBLE HEAT RELEASE | 2220.0 W |
| STEAM RELEASE | 1309.8 g/h | | |

ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

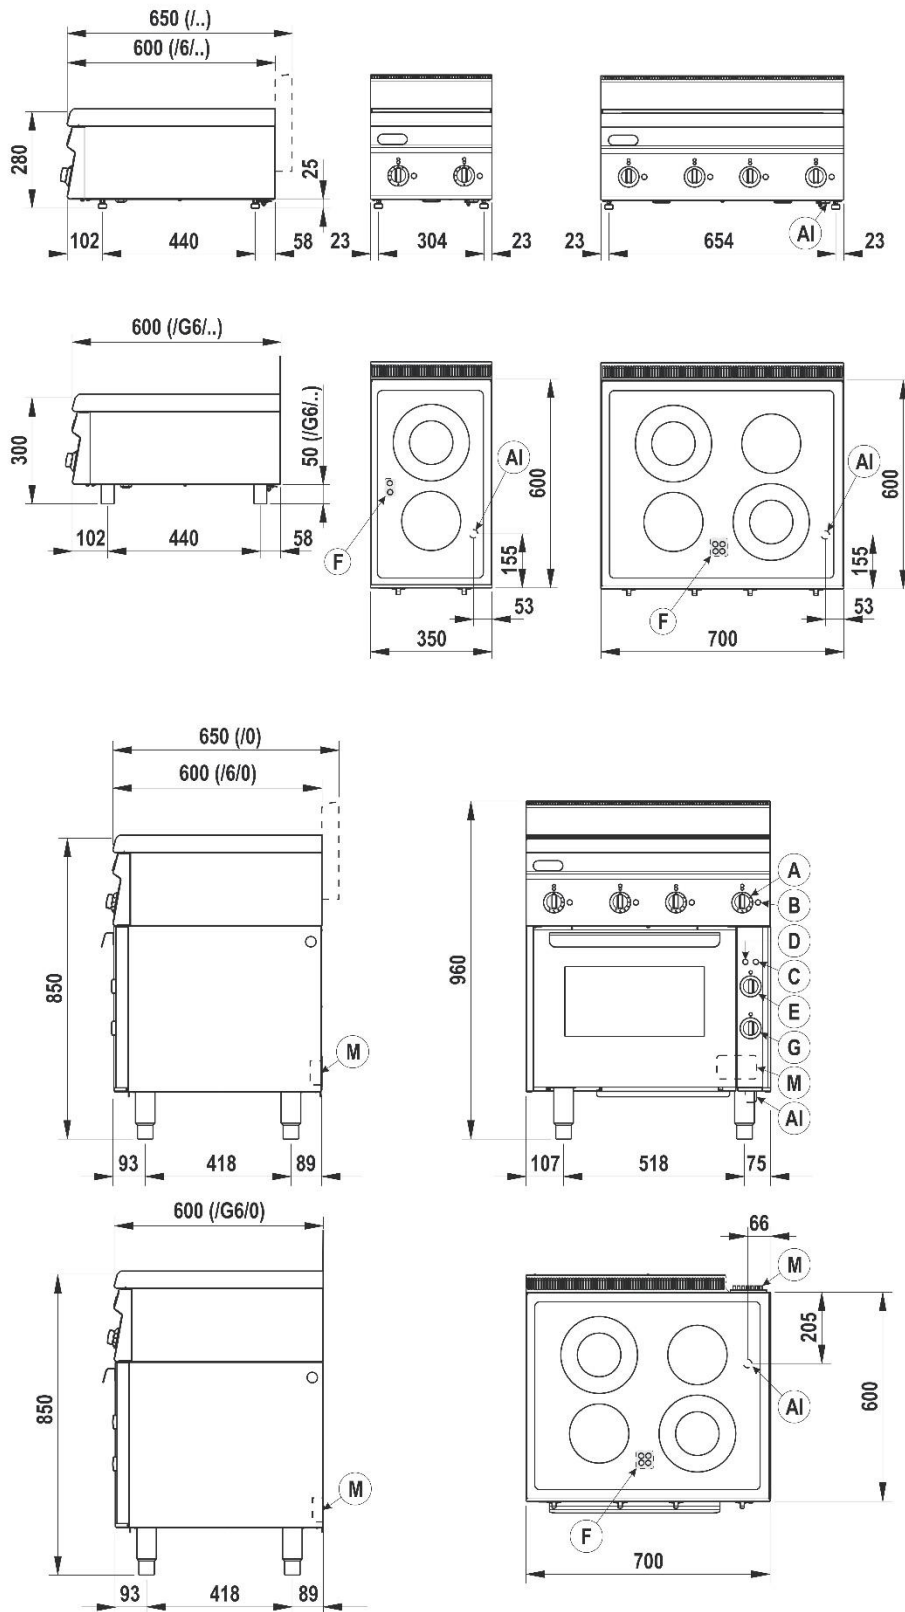


Fig.1 | Abb.1 | рис.1 - 5415.673.00