

---

**133005****DPCG35G****2-BURNER GAS BOILING TOP (DROP-IN VERSION)**

---



- 2-burner gas drop-in (35 x 60 x 30.7 cm).
- Drop-ins are appliances inserted into worktops of different non-flammable materials. Modules can rest on the worktop or be installed flush the worktop.
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning.
- Cast-iron enamelled burners fixed to the worktop with a single ring (3.3 kW and 5.2 kW).
- Brass flame spreader.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Stainless steel control panel.
- AISI 304 stainless steel worktop with Scotch Brite finish.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- Unless specified otherwise, the models in the price list are tested with G20 natural gas nozzles and include a set of nozzles for conversion to G30/G31 LPG gas or vice versa, based on customer order.

---

**TECHNICAL DATA**


TOTAL POWER	8,5 kW	GAS POWER	8,5 kW
OPEN BURNER POWER	1X3,3+1X5,2 n°- kW	BOILING TOP POWER	8,5 kW
NATURAL GAS CONSUMPTION	0,89 m³/h	NUMBER OF BURNERS	n° 2
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085BO0091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	WIDTH	35 cm
DEPTH	60 cm	HEIGHT	30,7 cm
PACKAGE WIDTH	71,0 cm	PACKAGE DEPTH	42 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	12 kg
GROSS WEIGHT	17 kg	VOLUME	0,16 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	0.67 m³/h

---

**ACCESSORIES**

120655 PAN SUPPORT REDUCER

INSTALLATION SCHEMES

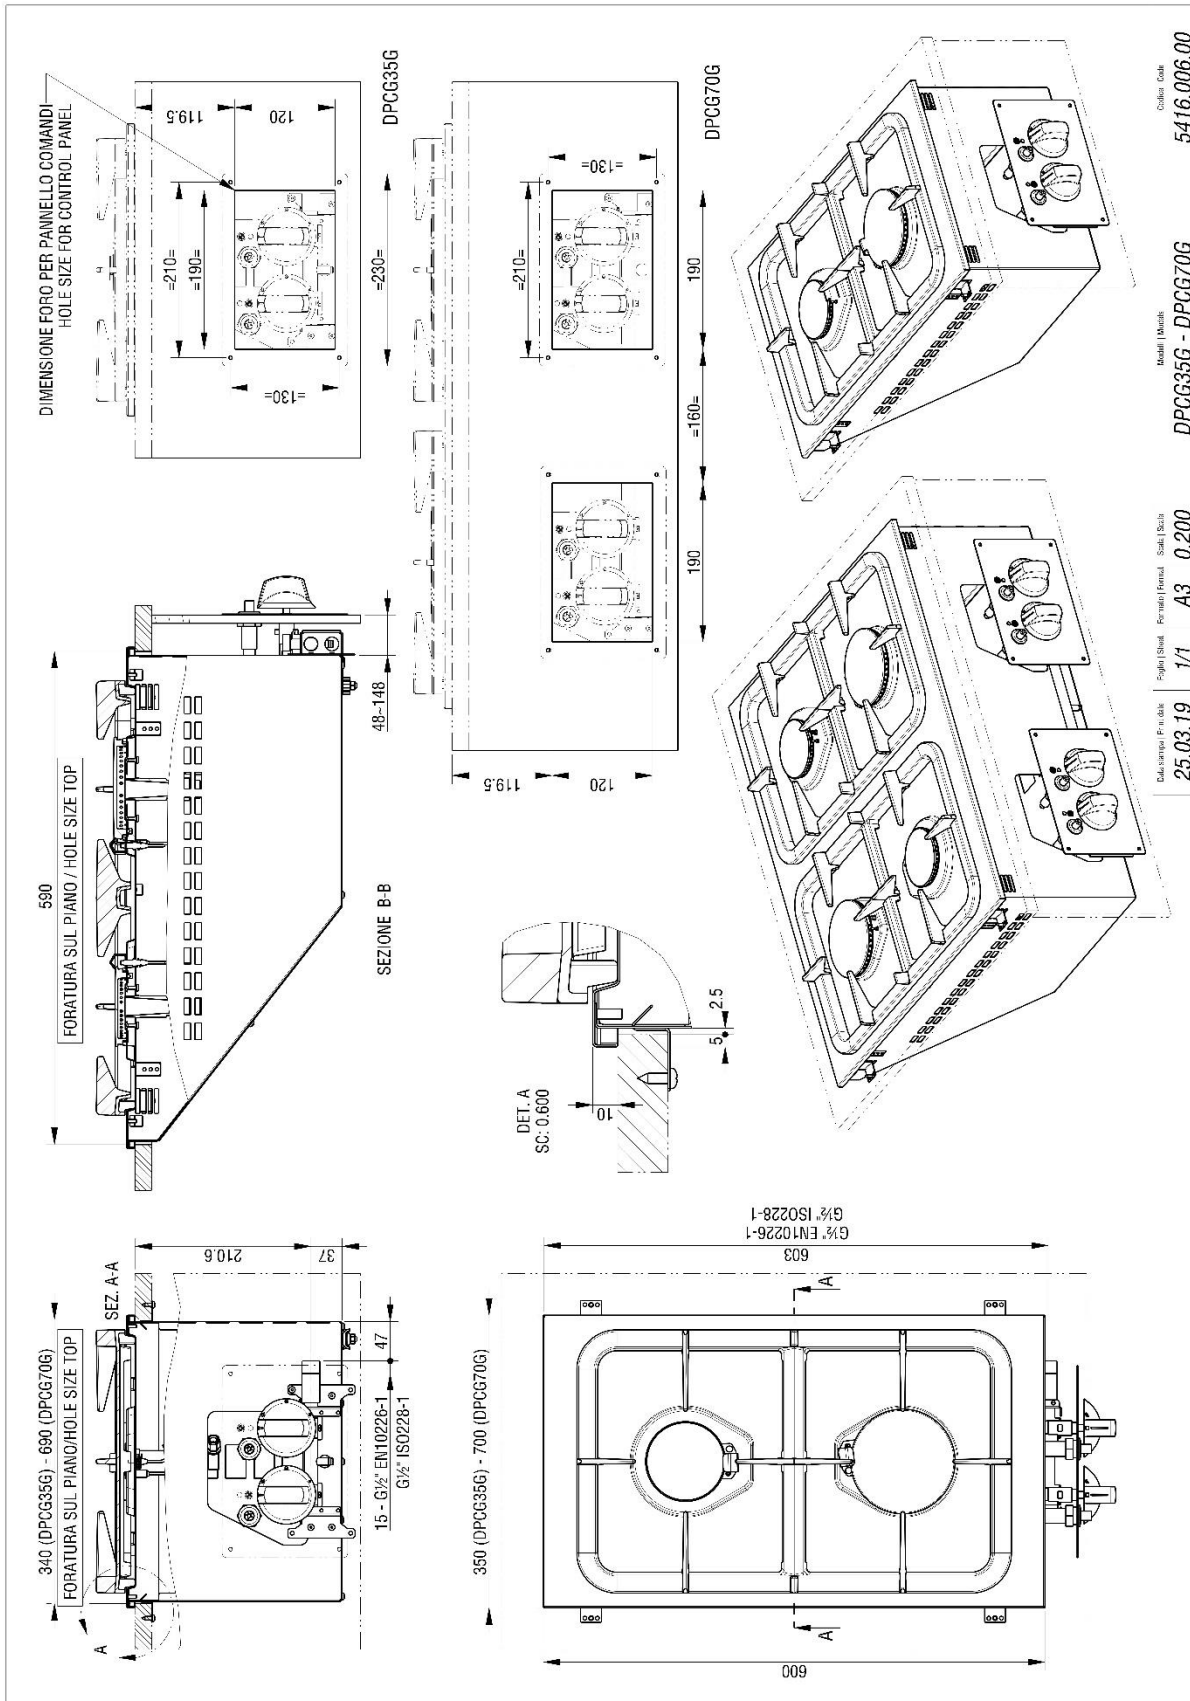

Data stamp: F. n. d. k. / Foglio Sheet / Formato Format. / Scala Scale  
 25.03.19 / 1/1 / A3 / 0.200  
 Modello Model / Codice Code  
 DPCG35G - DPCG70G / 5416.006.00