


313292

PFXH12HPGG9

6-BURNER HERMETIC GAS BOILING TOP HIGH POWER WITH CAST IRON GRIDS ON GAS STATIC FULLSIZE OVEN WITH 1 GRID

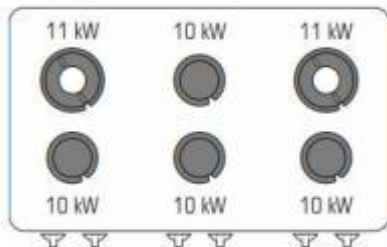

- 6-burner gas cooker on a FULL-SIZE gas static oven H30 92.5x63x30 cm, total width 120 cm, HIGH POWER.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> FULL-SIZE GAS STATIC OVEN H30 92.5x63x30CMm.

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber with 2 removable pickled steel bottoms (3 mm thick).

>> Long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Chrome-plated steel 2-branch tubular burner.

>> Operating thermostatic valve, maximum temperature 300°C.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Removable stainless steel side tray racks.

>> 1 grid included.

- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	71 kW	GAS POWER	71 kW
OVEN POWER	9 kW	OPEN BURNER POWER	10X4 + 11X2 n°- kW
BOILING TOP POWER	62 kW	TRAY CAPACITY	n° 4x(883x603)
NATURAL GAS CONSUMPTION	7,51 m³/h	COOKING CHAMBER DIMENSIONS	92,5x63x30 cm
OVEN DIMENSIONS	Full size H. 30 cm	GUIDES	n° 4
NUMBER OF BURNERS	n° 6	VERTICAL DISTANCE BETWEEN TRAYS	6 cm
OVEN TEMPERATURE RANGE	150÷290 °C	BOILING PAN SUPPORT	RAAF enamelled cast iron
OVEN TYPE	Static	CE GAS CERTIFICATE NUMBER	CE-0085BQ0326
GAS CONNECTION DIAMETER	3/4" G EN10226-1	WIDTH	120 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	126 cm	PACKAGE DEPTH	100,0 cm
PACKAGE HEIGHT	116,0 cm	NET WEIGHT	205 kg
GROSS WEIGHT	227,8 kg	VOLUME	1,46 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	5.59 m³/h
LATENT HEAT RELEASE	8520.0 W	SENSIBLE HEAT RELEASE	21300.0 W
STEAM RELEASE	12496.0 g/h		

ACCESSORIES

220595	EXTRA FULL-SIZE OVEN GRID (88X62CM)
319011	REAR COVERING PANEL FOR CABINET (L=120CM)
319067	10KW HERMETIC FLAME SPREADER
399516	ADJUSTABLE WATER TAP
399538	PAN SUPPORT REDUCER
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)
619013	FULL SIZE INOX TRAY

INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة