
316140

PCU4FE9

FREESTANDING ELECTRIC BOILING TOP WITH 2 SQUARED TILTING PLATES (30X30 CM - 11.8X11.8 IN) ON OPEN CABINET



- Freestanding boiling top with 2 coplanar, tilting, electric plates on an open cabinet (40 cm).
- Coplanar, tilting, squared, cast iron electric plates (30x30 cm and 8 mm thick) not hermetically sealed to the worktop.
- 3 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Drawer to collect cooking residue.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	6 kW	COOKING ZONE POWER	2X3 n°- kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	CABINET DIMENSIONS	33x76,1x39,5 cm
NUMBER OF COOKING ZONES	n° 2	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	133 mm	FOOT ADJUSTMENT	133/195 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	101 cm	PACKAGE DEPTH	46 cm
PACKAGE HEIGHT	116 cm	NET WEIGHT	60 kg
GROSS WEIGHT	77 kg	VOLUME	0,53 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	480.0 W
SENSIBLE HEAT RELEASE	1200.0 W	STEAM RELEASE	708.0 g/h

ACCESSORIES

- 319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
- 319009 REAR COVERING PANEL FOR CABINET (L=40CM)
- 399516 ADJUSTABLE WATER TAP
- 399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

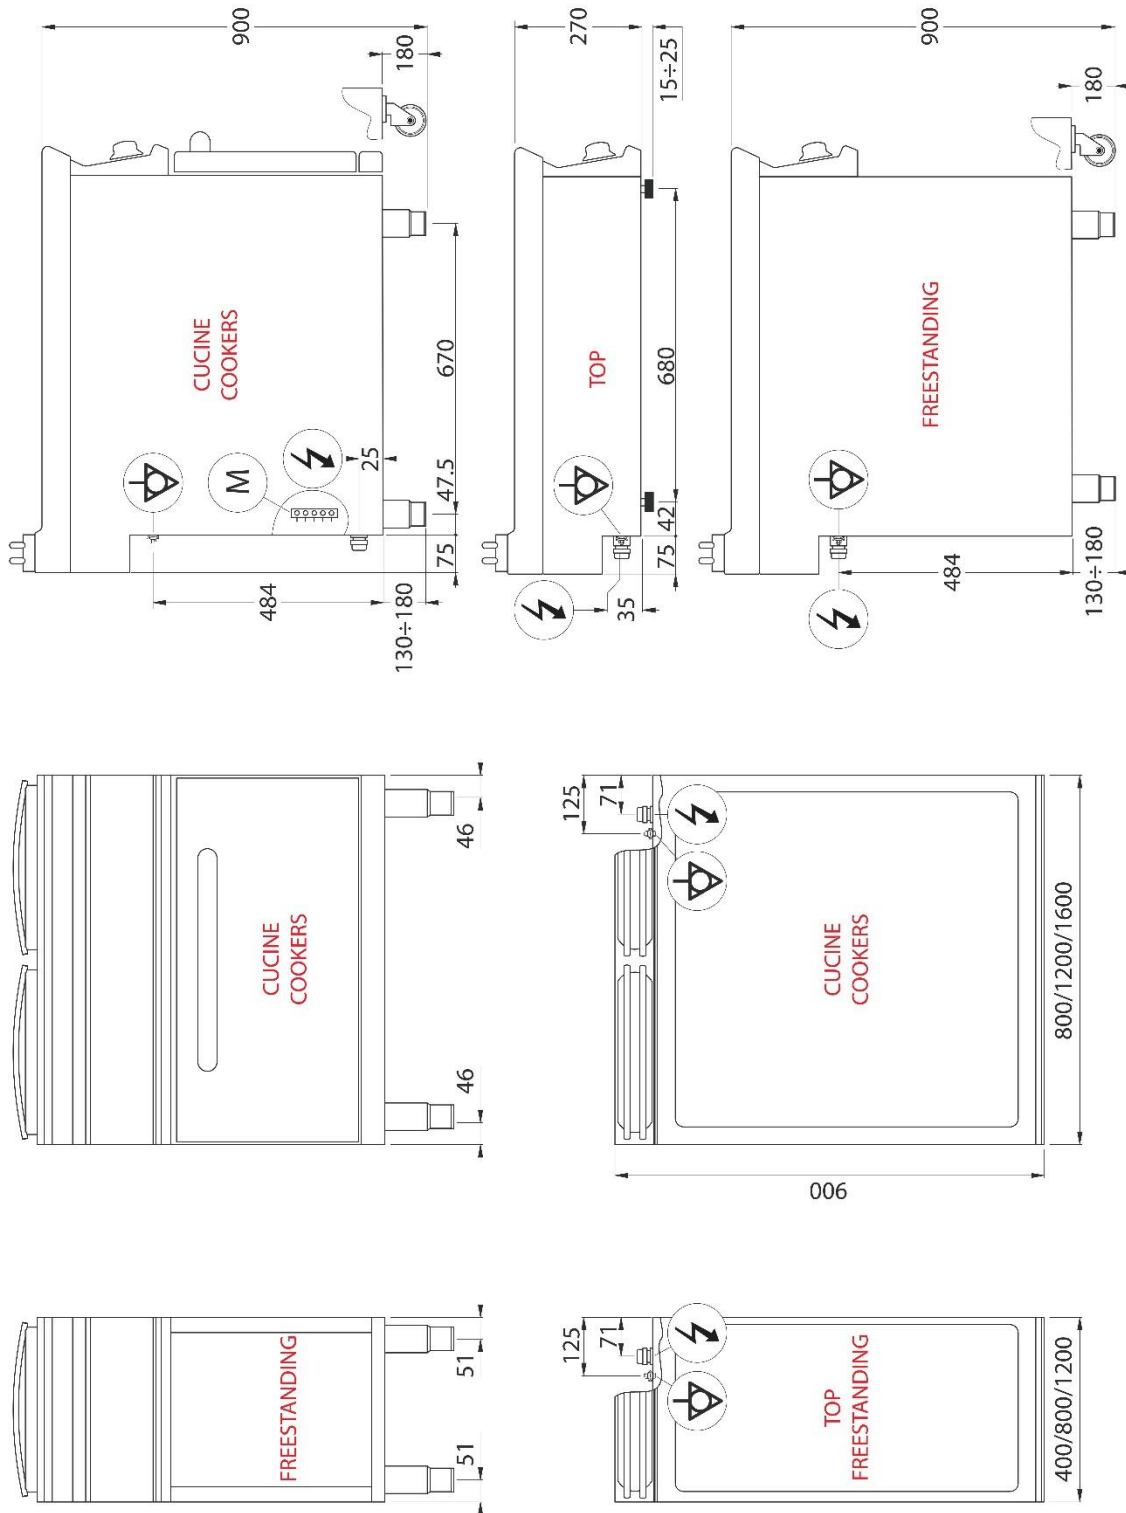


Fig.1 | Abb.1 | pvc.1 - 5415.561.00