


613001

PC35G7

2-BURNER GAS BOILING TOP WITH CAST IRON GRIDS (TOP VERSION)



- 2-burner gas boiling top (35 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 kW) and double ring (7.2 kW).
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

TECHNICAL DATA

TOTAL POWER	10,5 kW	GAS POWER	10,5 kW
OPEN BURNER POWER	1x7,2 + 1x3,3 n°- kW	BOILING TOP POWER	10,5 kW
NATURAL GAS CONSUMPTION	1,12 m³/h	NUMBER OF BURNERS	n° 2
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	26 mm
GAS CONNECTION HEIGHT (X)	307 mm	GAS CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	35 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	23,4 kg	GROSS WEIGHT	27,8 kg
VOLUME	0,1700 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	0.83 m³/h	LATENT HEAT RELEASE	1260.0 W
SENSIBLE HEAT RELEASE	3150.0 W	STEAM RELEASE	1848.0 g/h

ACCESSORIES

120655 PAN SUPPORT REDUCER

INSTALLATION SCHEMES

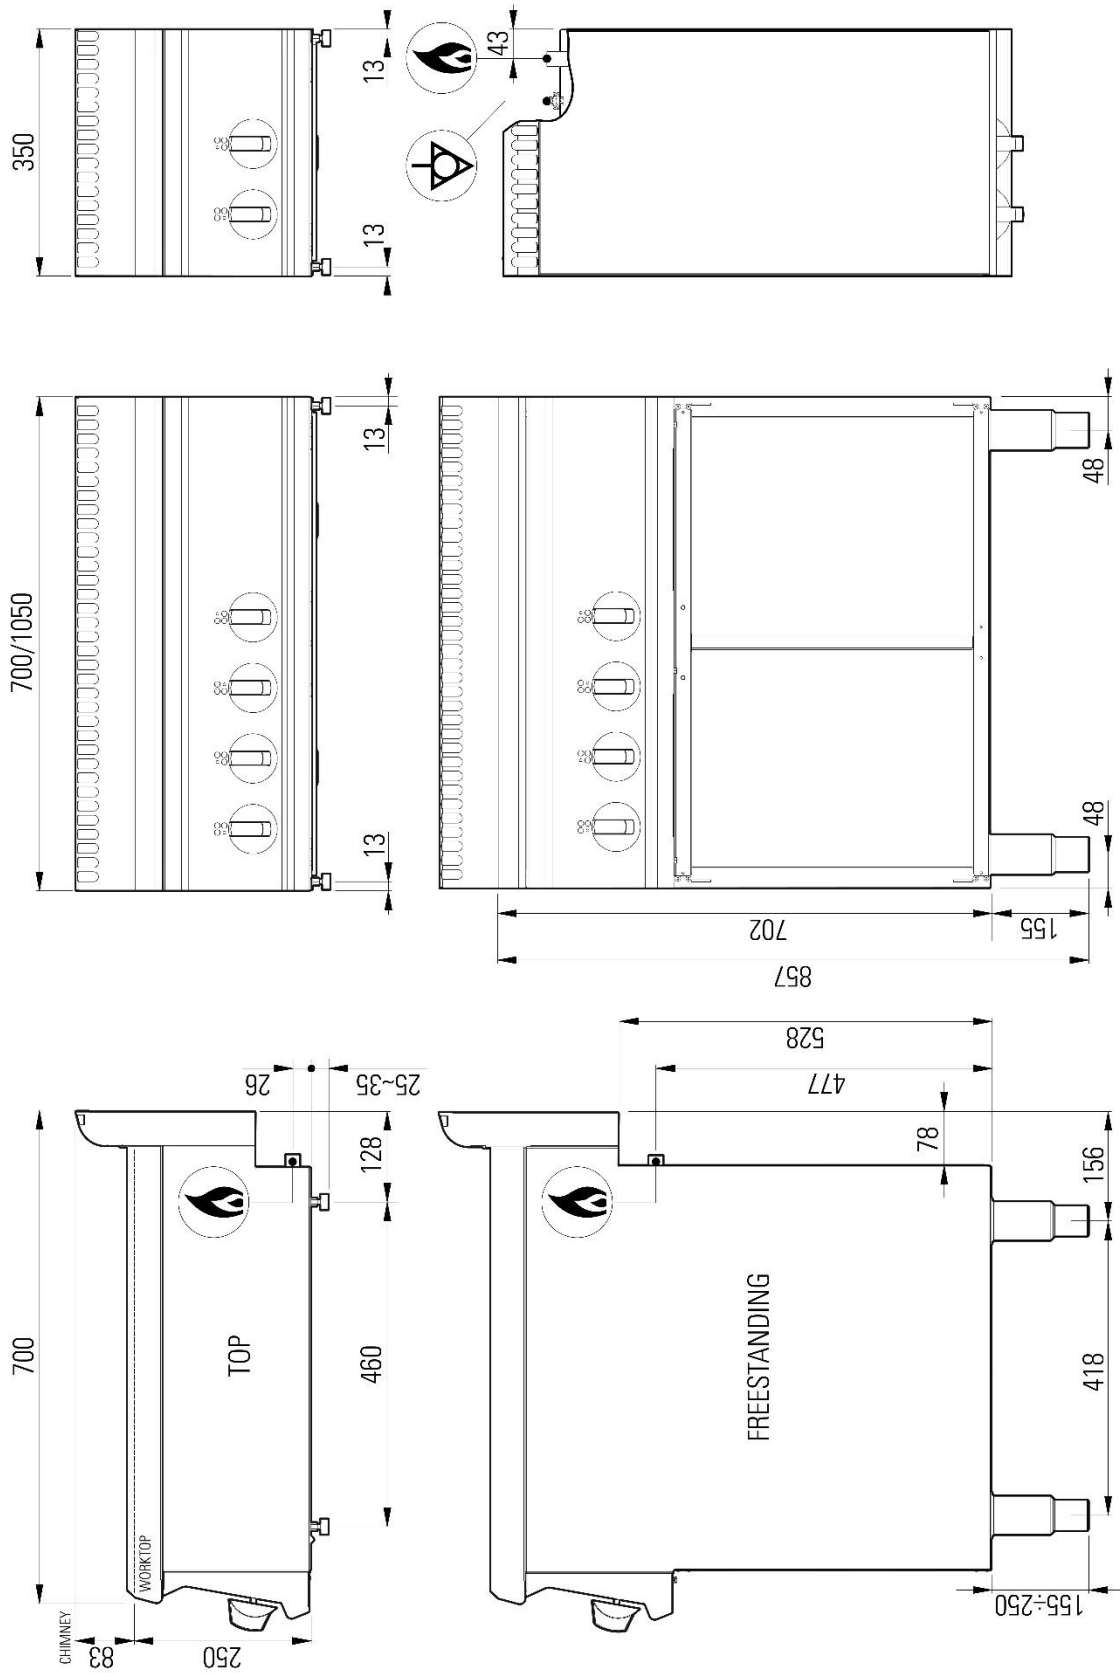


Fig.1 | Abb.1 | рис.1 - 5415.550.00