


**616005**

PCR70E7

**ELECTRIC BOILING TOP WITH 3+1 ROUND HERMETIC PLATES (DIAM. 22CM - 8.7 IN, & DIAM 15 CM - 5.9 IN, TOP VERSION)**



- Electric boiling top (70 cm top version) with cast-iron, round plates (3 with a diameter of 22 cm and 1 with a diameter of 15 cm).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 3x2.6 kW and 1x1.5 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



---

**TECHNICAL DATA**

TOTAL POWER	9,3 kW	ELECTRIC POWER	9,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	9,3 kW	COOKING ZONE POWER	3x2,6 + 1x1,5 n°- kW
ELECTRIC PLATE DIMENSIONS	3xØ22 + 1xØ15 cm	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	77,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	25,6000 kg	GROSS WEIGHT	32 kg
VOLUME	0,3300 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	744.0 W	SENSIBLE HEAT RELEASE	1860.0 W
STEAM RELEASE	1097.4 g/h		

---

**ACCESSORIES**

220585 JOINT

INSTALLATION SCHEMES

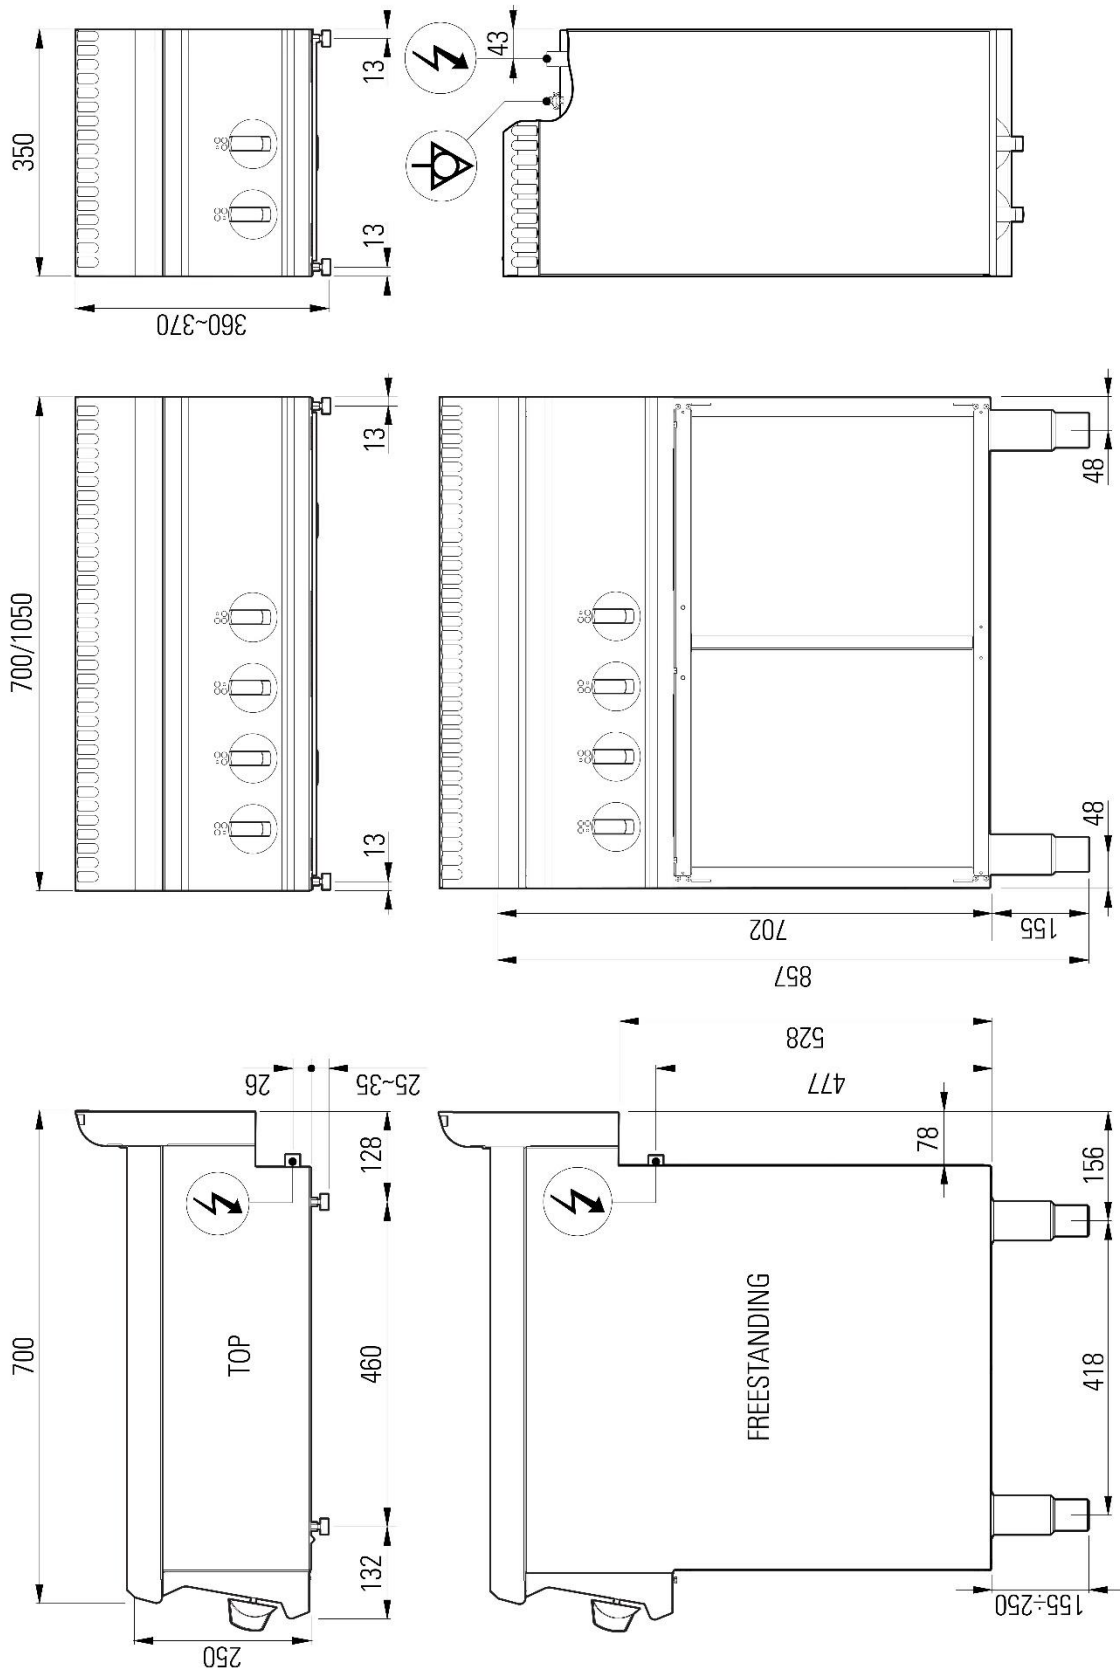


Fig.1 | Abb.1 | рис.1 - 5415.661.00