


616008

PCS35E7

**ELECTRIC BOILING TOP WITH 2 SQUARED
HERMETIC PLATES (22X22 CM - 8.7X8.7 IN, TOP
VERSION)**



- Electric boiling top (35 cm, top version) with 2 squared cast iron plates (22x22 cm).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	5,2 kW	ELECTRIC POWER	5,2 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	5,2 kW	COOKING ZONE POWER	2x2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	22x22 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	26 mm	ELECTRICAL CONNECTION HEIGHT (X)	307 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	40 cm	PACKAGE HEIGHT	52 cm
NET WEIGHT	19,6000 kg	GROSS WEIGHT	23,6 kg
VOLUME	0,1700 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	416.0 W	SENSIBLE HEAT RELEASE	1040.0 W
STEAM RELEASE	613.6 g/h		

ACCESSORIES

220585 JOINT
220690 TOP FRAME FOR 2 SQUARE HOT PLATES

INSTALLATION SCHEMES

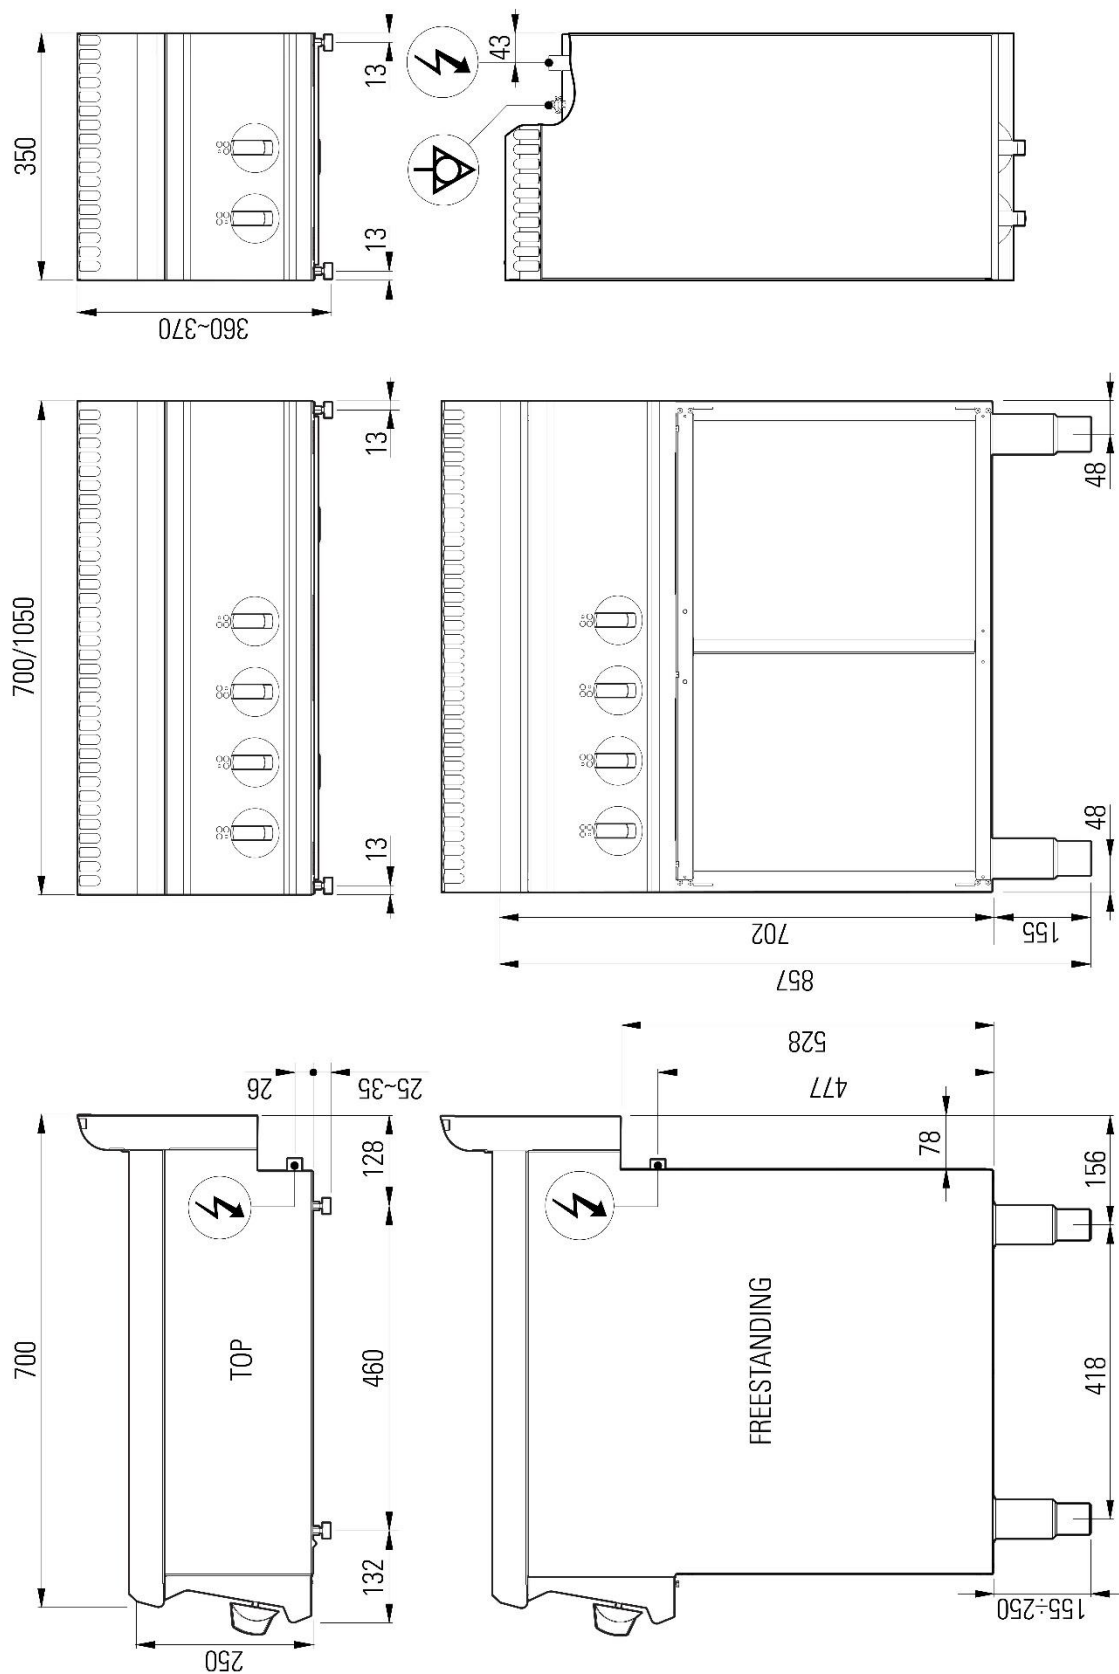


Fig.1 | Abb.1 | рис.1 - 5415.661.00