


616009

PCS70E7

ELECTRIC BOILING TOP WITH 4 SQUARED HERMETIC PLATES (22X22 CM - 8.7X8.7 IN, TOP VERSION)



- Electric boiling top (70 cm, top version) with 4 squared cast iron plates (22x22 cm).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	10,4 kW	ELECTRIC POWER	10,4 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	10,4 kW	COOKING ZONE POWER	4x2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	22x22 cm	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	26 mm	ELECTRICAL CONNECTION HEIGHT (X)	657 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	77,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	31,600 kg	GROSS WEIGHT	42,0000 kg
VOLUME	0,3300 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	832.0 W	SENSIBLE HEAT RELEASE	2080.0 W
STEAM RELEASE	1227.2 g/h		

ACCESSORIES

220585 JOINT
220690 TOP FRAME FOR 2 SQUARE HOT PLATES

INSTALLATION SCHEMES

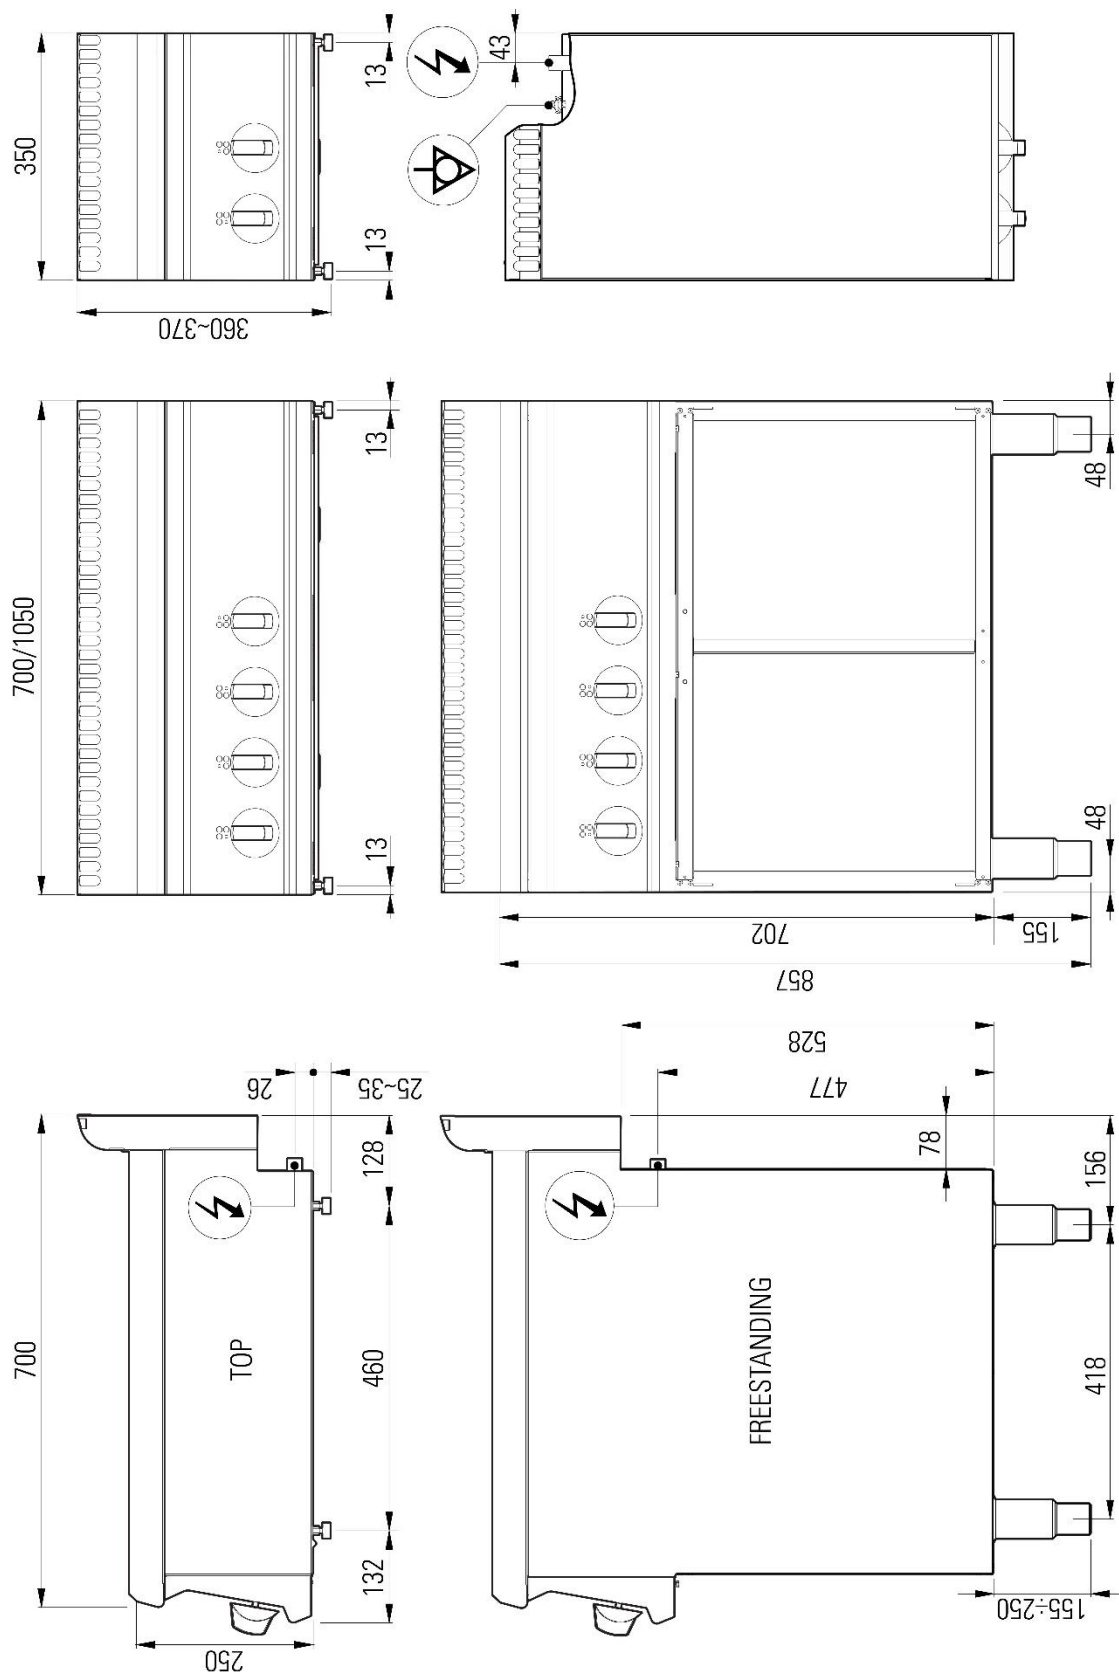


Fig.1 | Abb.1 | рис.1 - 5415.661.00