


713151

PFG8G7

## 4 BURNERS GAS BOILING TOP WITH CAST IRON GRIDS ON GN2/1 ELECTRIC STATIC OVEN WITH 1 GRID



- 4-burner gas cooker on a GN 2/1 electric static oven (80 cm).
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 and 4.5 kW) and double ring (7.2 kW).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 ELECTRIC STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre seal gasket resistant to high temperatures.

>> Heating through upper and lower heating elements that can be activated together or separately.

>> Thermostatic control 60-270°C.

>> Stainless steel removable side tray racks

>> 1 grid supplied included.

- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

## TECHNICAL DATA

TOTAL POWER	19,5 + 5,3 kW	GAS POWER	19,5 kW
ELECTRIC POWER	5,3 kW	FREQUENCY	50/60 Hz
VOLTAGE	380-415 3N~ V	OVEN POWER	5,3 kW
OPEN BURNER POWER	1x3,3+2x4,5+1x7,2 n°- kW	BOILING TOP POWER	19,5 kW
TRAY CAPACITY	n° 4xGN2/1	NATURAL GAS CONSUMPTION	2,06 m³/h
COOKING CHAMBER DIMENSIONS	57,5x65x30 cm	OVEN DIMENSIONS	GN2/1
GUIDES	n° 4	NUMBER OF BURNERS	n° 4
VERTICAL DISTANCE BETWEEN TRAYS	6 cm	OVEN TEMPERATURE RANGE	60÷270 °C
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²	BOILING PAN SUPPORT	RAAF enamelled cast iron
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Static
CE GAS CERTIFICATE NUMBER	CE-0085BO0091	ELECTRICAL CONNECTION HEIGHT (H)	0 mm
ELECTRICAL CONNECTION HEIGHT (X)	650 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-580 mm
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	0 mm
GAS CONNECTION HEIGHT (X)	766 mm	GAS CONNECTION HEIGHT (Y)	-412 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	80 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	86 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	113 kg
GROSS WEIGHT	123,5 kg	VOLUME	0,7900 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	1,54 m³/h
LATENT HEAT RELEASE	2340.0 W	SENSIBLE HEAT RELEASE	5850.0 W
STEAM RELEASE	3432.0 g/h		

## ACCESSORIES

220590	EXTRA OVEN GRID GN2/1 (53X63CM)
399516	ADJUSTABLE WATER TAP
619012	GN2/1 INOX TRAY
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

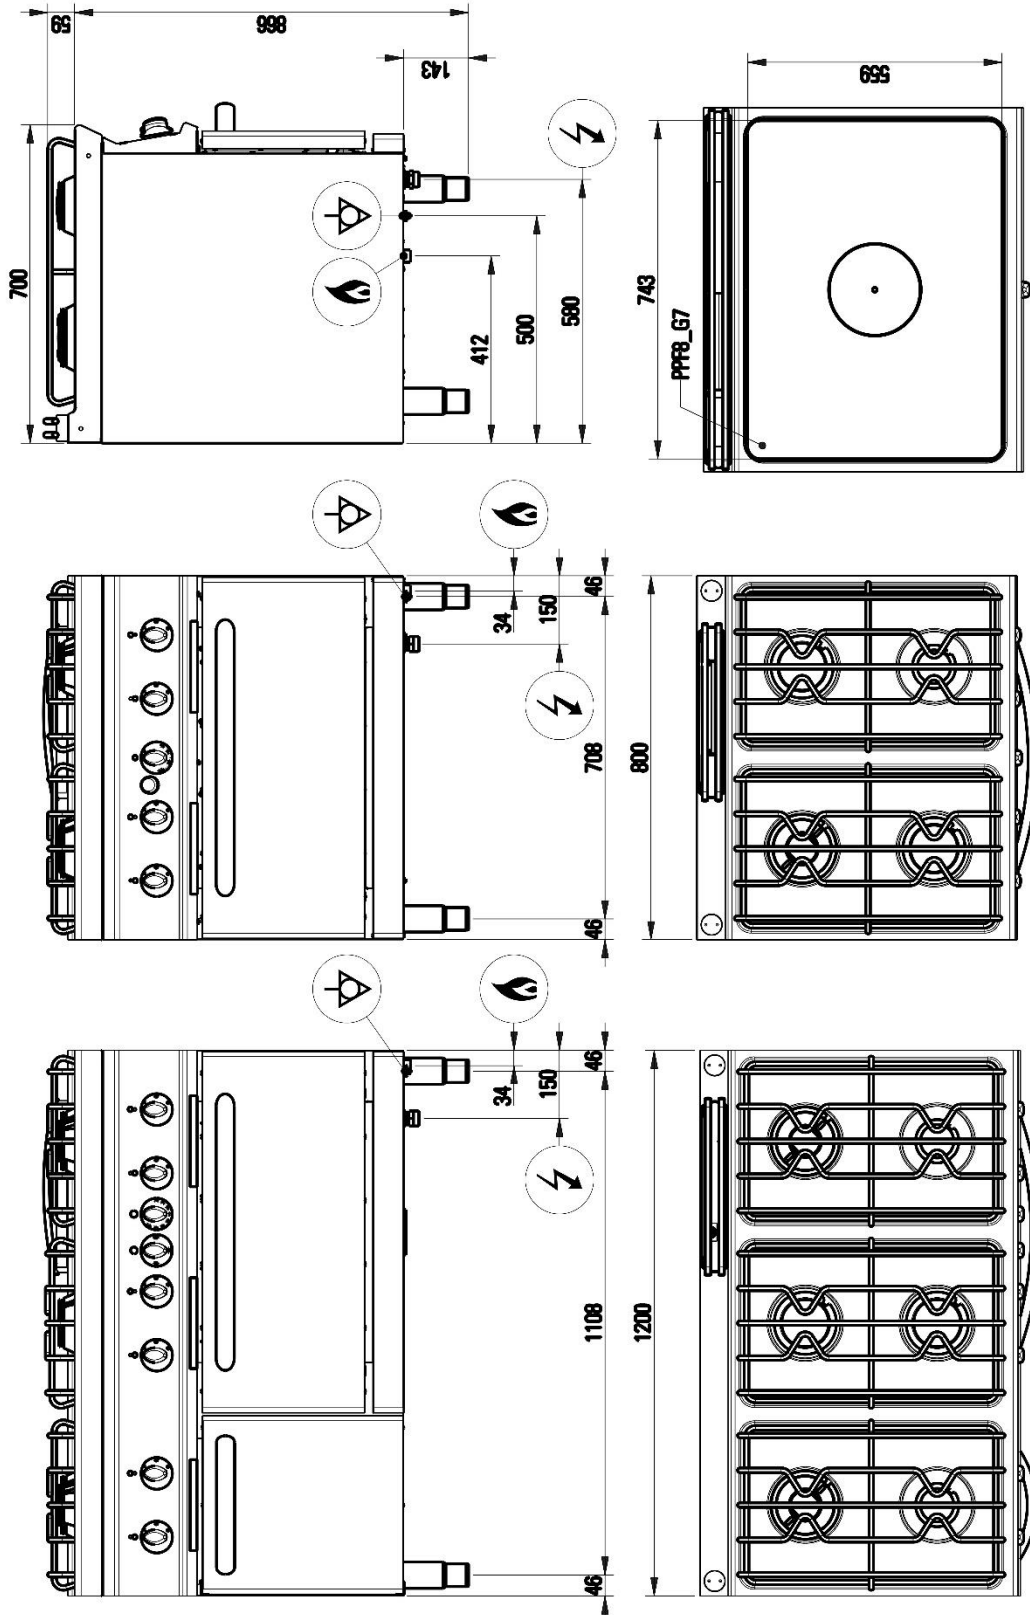


Fig.1 | Abb.1 | pnc.1 - 5415.647.00