

713154

FTL12G7

GAS GRIDDLE WITH A SMOOTH PLATE (TOP VERSION)



- Gas griddle (120 cm), top version with a smooth steel plate.
- The cooking plate recessed and hermetically welded to the worktop allows you to cook large quantities of different foods.
- Sloped cooking plate (15 mm thick) to facilitate the drainage of grease and liquids.
- Heating through 3 2-branch chrome-plated steel burners (7 kW) with 3 independent working zones.
- Operating thermostatic valve.
- Height-adjustable (15/25 mm) rubbed plastic feet.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Ignition through a piezoelectric device with a water protection cap.
- Pilot burner and safety thermocouple.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Removable splashback on 3 sides and cap included.
- Technical compartment for easy connection to the gas network.
- \bullet The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA

TOTAL POWER	21.6 kW	GAS POWER	21.6 kW
TEMPERATURE RANGE	60÷300 °C	NATURAL GAS CONSUMPTION	2,22 m³/h
COOKING SURFACE	113x56 cm	PLATE TYPE	Smooth
HEATING ZONES	n° 3	CE GAS CERTIFICATE NUMBER	CE-0085BO0093
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	127 cm
PACKAGE DEPTH	81 cm	PACKAGE HEIGHT	54 cm
NET WEIGHT	123 kg	GROSS WEIGHT	132 kg
VOLUME	0,55 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.7 m³/h	LATENT HEAT RELEASE	8640.0 W
SENSIBLE HEAT RELEASE	7560.0 W	STEAM RELEASE	12700.8 g/h

ACCESSORIES

120595 GRIDDLE-CLEANING SCRAPER

120597 SCRAPER - SPARE BLADE KIT (10 PCS) 719040 SIDE HEAT PROTECTION DEVICE

799506 PAIR OF CLOSING ELEMENTS (L=70CM)



INSTALLATION SCHEMES

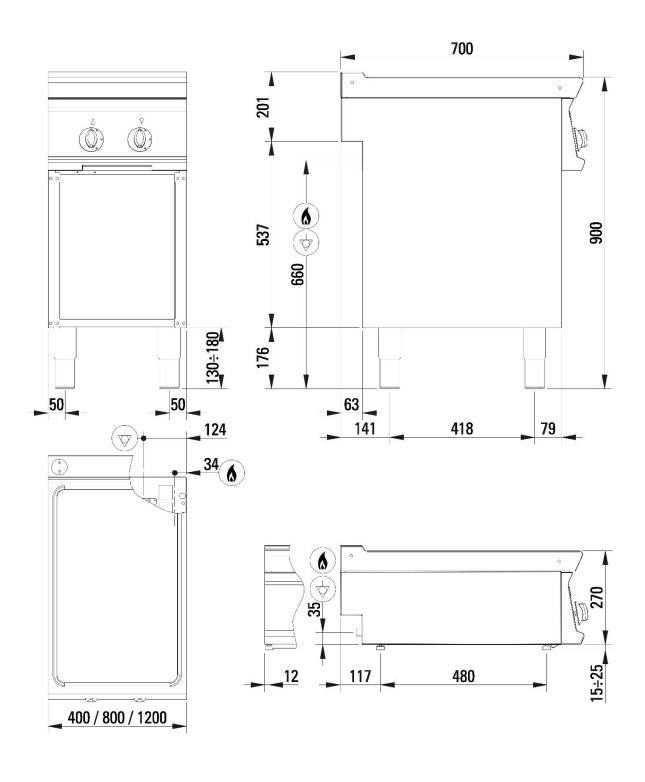


Fig.1 | Abb.1 | рис.1 - 5415.649.00