

713177

FTL4FG7

## FREESTANDING GAS GRIDDLE WITH SMOOTH PLATE ON OPEN CABINET



- Freestanding gas griddle with a smooth steel cooking plate on an open cabinet (40 cm).
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Sloped cooking plate (12 mm thick) to facilitate the drainage of grease and liquids.
- Heating through 1 2-branch chrome-plated steel burner (7 kW).
- Valved gas cock with maximum temperature of 390°C.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Ignition through a piezoelectric device with a water protection cap.
- Pilot burner and safety thermocouple.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Removable splashback on 3 sides and cap included.
- Technical compartment for easy connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

## TECHNICAL DATA

TOTAL POWER	7 kW	GAS POWER	7 kW
NATURAL GAS CONSUMPTION	0,74 m <sup>3</sup> /h	CABINET DIMENSIONS	33x57,4x39,5 cm
COOKING SURFACE	35,3x56,4 cm	PLATE TYPE	Smooth
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085B00093
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	660 mm
GAS CONNECTION HEIGHT (X)	366 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	82 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	116 cm
NET WEIGHT	52,5 kg	GROSS WEIGHT	62,5 kg
VOLUME	0,44 m <sup>3</sup>	HARMONISED CODE	84198180
LPG CONSUMPTION	0.55 m <sup>3</sup> /h	LATENT HEAT RELEASE	2800.0 W
SENSIBLE HEAT RELEASE	2450.0 W	STEAM RELEASE	4116.0 g/h

## ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - SPARE BLADE KIT (10 PCS)
319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719004	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

## INSTALLATION SCHEMES

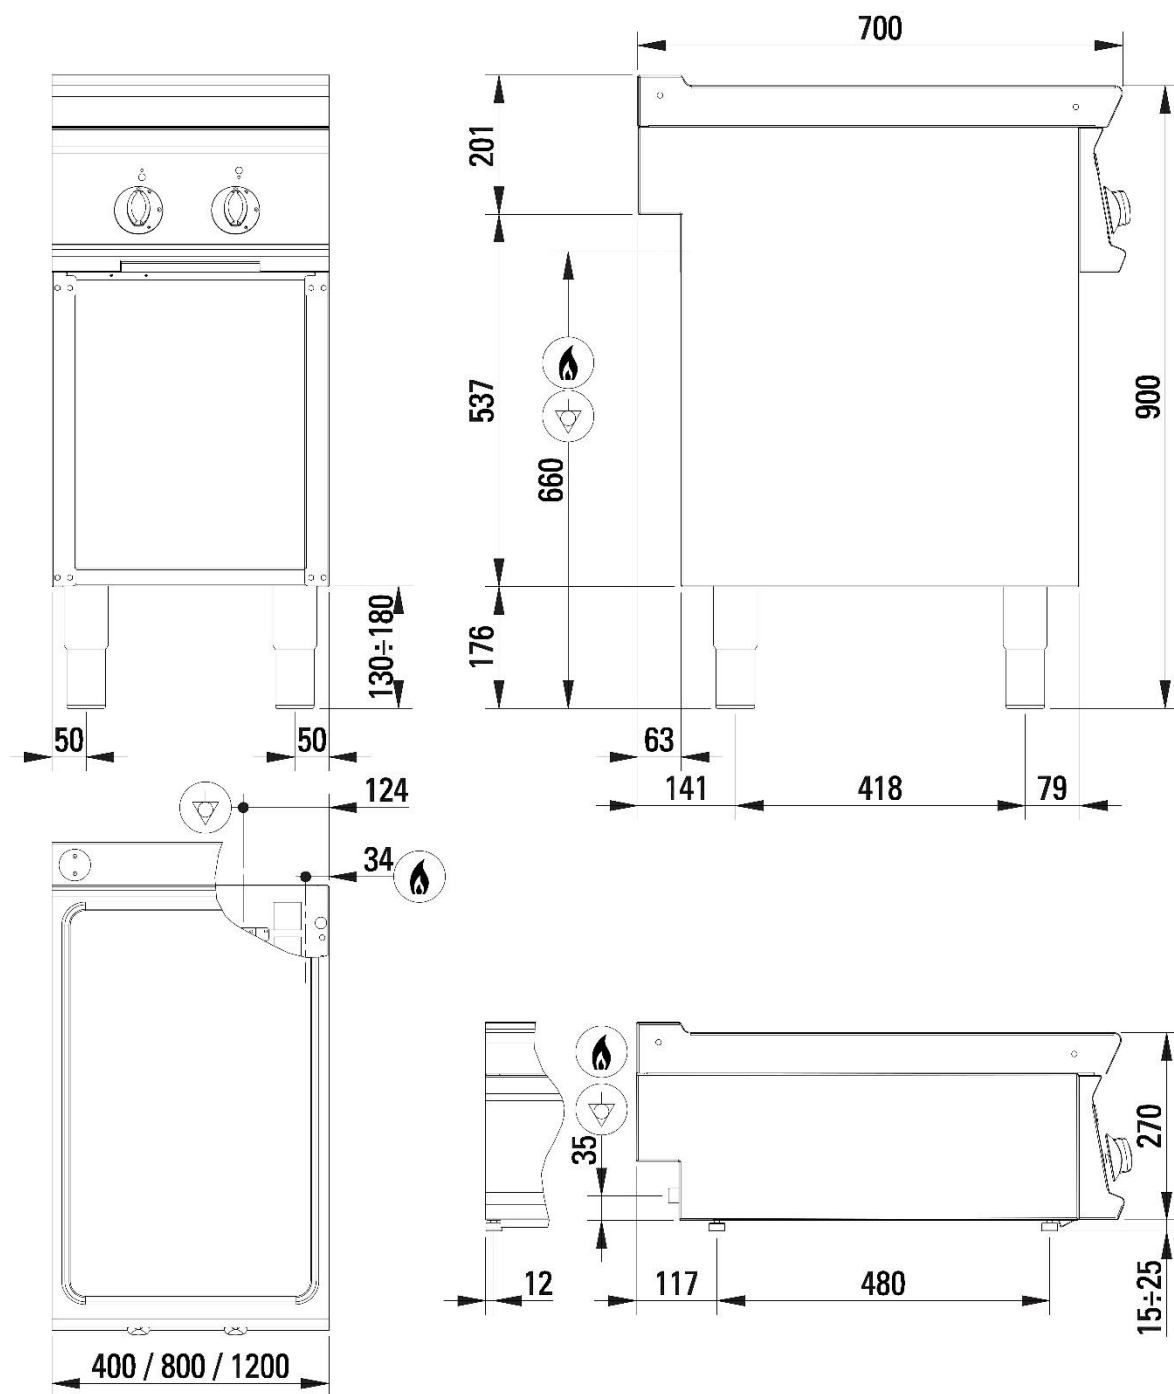


Fig.1 | Abb.1 | рис.1 - 5415.649.00