


713204

PCH12FG7

6-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRIDS ON OPEN CABINET





- Freestanding 6-burner gas boiling top on an open cabinet (120 cm).
- High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- · Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA			
TOTAL POWER	37,5 kW	GAS POWER	37,5 kW
OPEN BURNER POWER	3x5 + 3x7,5 n°- kW	BOILING TOP POWER	37,5 kW
NATURAL GAS CONSUMPTION	3,96 m³/h	LPG CONSUMPTION	2.96 m³/h
CABINET DIMENSIONS	113x57,4x39,5 cm	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	RAAF enamelled cast iron	GAS CONNECTION DIAMETER	3/4"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	1166 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	125,0 cm	PACKAGE DEPTH	80 cm
PACKAGE HEIGHT	113 cm	NET WEIGHT	93,7 kg
GROSS WEIGHT	116,6 kg	VOLUME	1,13 m³

LATENT HEAT RELEASE

STEAM RELEASE

4500.0 W

6600.0 g/h

ACCESSORIES

HARMONISED CODE

SENSIBLE HEAT RELEASE

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

84198180

11250.0 W



INSTALLATION SCHEMES

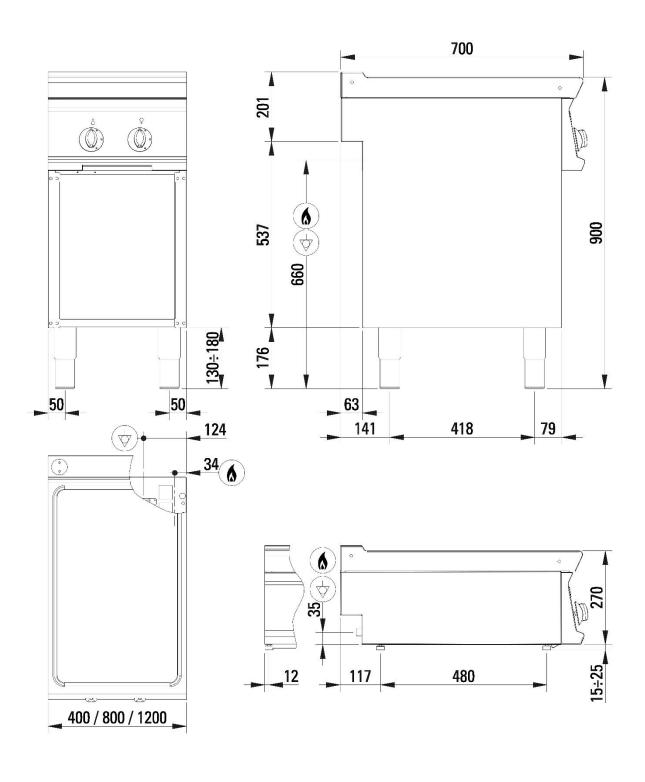


Fig.1 | Abb.1 | рис.1 - 5415.649.00