


716013

PCS8FE7

ELECTRIC BOILING TOP WITH 4 SQUARED HERMETIC PLATES (22X22 CM - 8.7X8.7 IN) ON OPEN CABINET



- Freestanding electric boiling top (80 cm) with 4 squared cast iron plates (22x22 cm) on an open cabinet.
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron electric plates hermetically sealed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	10,4 kW	ELECTRIC POWER	10,4 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	10,4 kW	COOKING ZONE POWER	4x2,6 n° - kW
ELECTRIC PLATE DIMENSIONS	22x22 cm	CABINET DIMENSIONS	73x57,4x39,5 cm
NUMBER OF COOKING ZONES	n° 4	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	ELECTRICAL CONNECTION HEIGHT (H)	660 mm
ELECTRICAL CONNECTION HEIGHT (X)	721 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	80 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	86 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	113 cm	NET WEIGHT	53,5000 kg
GROSS WEIGHT	66,8 kg	VOLUME	0,7900 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	832.0 W
SENSIBLE HEAT RELEASE	2080.0 W	STEAM RELEASE	1227.2 g/h

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
620690	TOP FRAME FOR 2 SQUARE HOT PLATES
719005	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

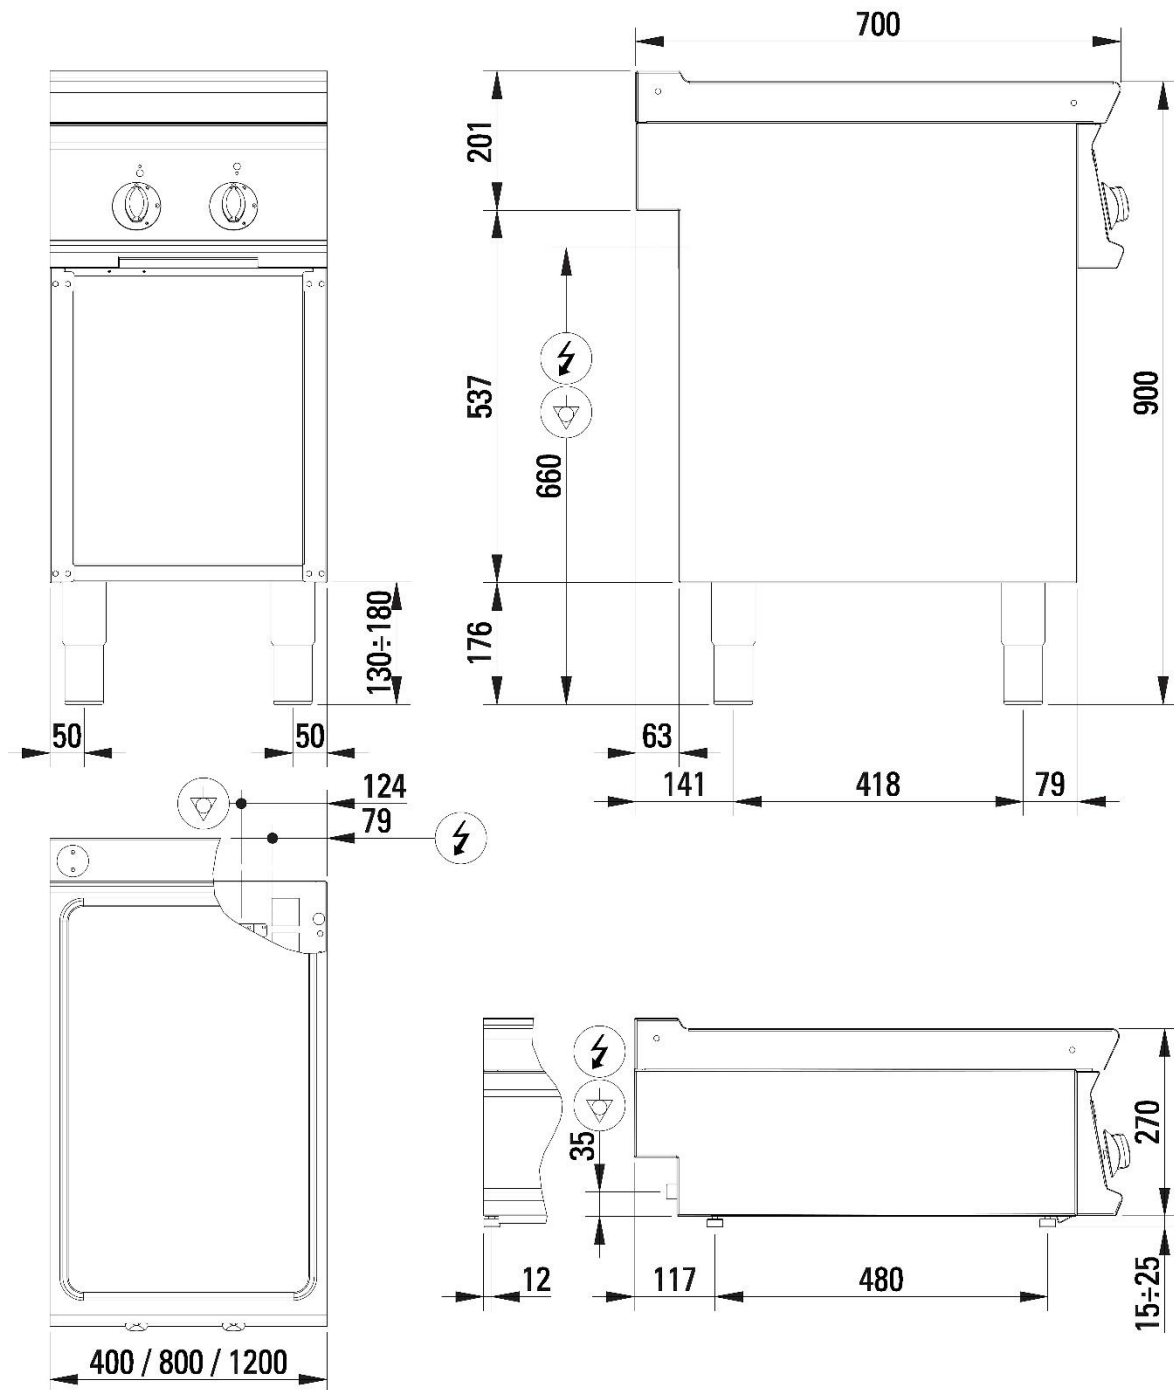


Fig.1 | Abb.1 | рис.1 - 5415.648.00