

716053

FR8FE7

**FREESTANDING DOUBLE TANK 8+8L ELECTRIC
FRYER WITH IN-TANK TILTING HEATING ELEMENTS
ON OPEN CABINET - BASKETS AND LIDS
INCLUDED**



- Electric fryer with 2 tanks 8+8 L on an open cabinet (80 cm).
- Power: 2x6 kW.
- Heating through AISI 304 stainless steel tilting armoured heating elements for easy cleaning of the tank.
- Basket support fixed to the tilting device.
- Front drain with elbow extension supplied.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- Baskets and lids included.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Deep drawn worktop with a seamlessly welded AISI 304 deep drawn cooking tank, featuring rounded corners.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Large front basin and front zone for oil and foam expansion.
- Adjustable operating thermostat ranging between 100°C and 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- A safety thermostat triggers in case of abnormal operation.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Technical compartment for easy connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	12 kW	ELECTRIC POWER	12 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	100÷190 °C	TANK CAPACITY	8lt+8lt
TANK DIMENSIONS	22,7x34x22,5 cm	HEATING	Heating elements in the tank
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
TANK TYPE	AISI 304	TANKS	n° 2
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	85 cm
PACKAGE DEPTH	82 cm	PACKAGE HEIGHT	114 cm
NET WEIGHT	52,2 kg	GROSS WEIGHT	61 kg
VOLUME	0,79 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	8400.0 W	SENSIBLE HEAT RELEASE	1080.0 W
STEAM RELEASE	12360.0 g/h		

ACCESSORIES

120575	EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
120690	2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)
319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719005	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

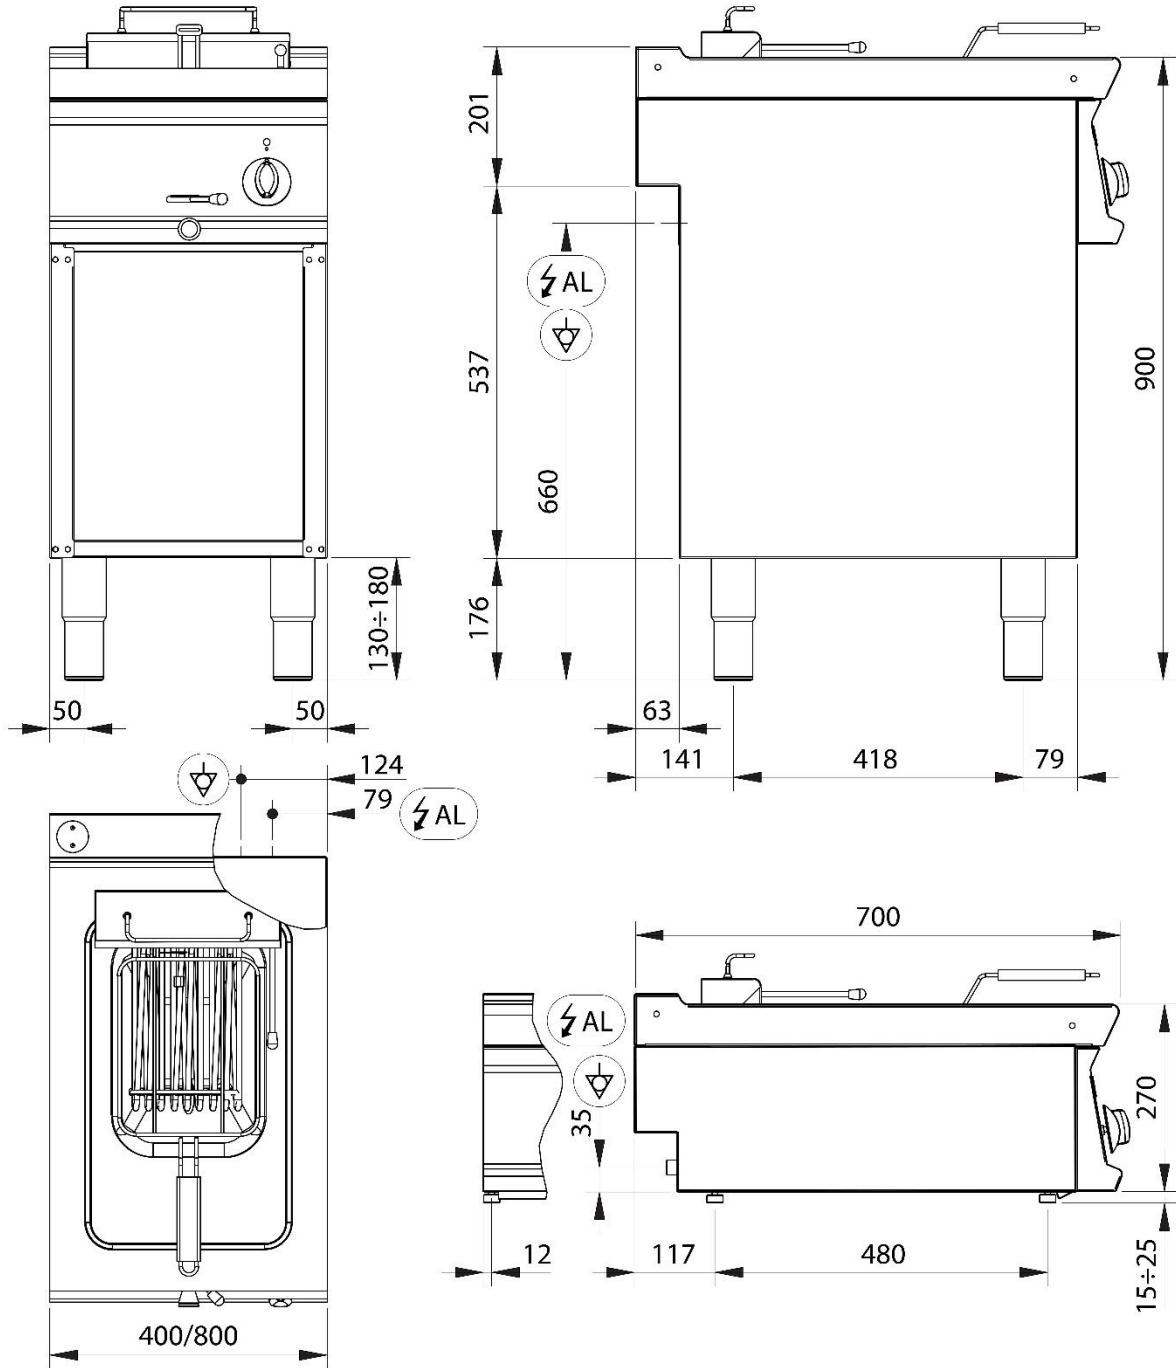


Fig.1 | Abb.1 | рис.1 - 5415.656.00