

716059

CP4FE7

**GN2/3 FREESTANDING SINGLE TANK 24L
ELECTRIC PASTA COOKER ON CLOSED CABINET -
BASKETS NOT INCLUDED**



- Freestanding GN2/3 electric pasta cooker 24 L on a closed cabinet (40 cm).
- Power: 6.0 kW.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Pasta cookers are used to boil rice, vegetables, meat and other products.
- Deep drawn worktop with a seamlessly welded deep drawn cooking tank, featuring rounded corners, overflow-proof tank and large foam expansion area.
- AISI 316 stainless steel tank, drainpipe, and false bottom for long-lasting resistance against salt corrosion.
- Water filling control inside the cabinet.
- Heating through armoured heating elements in Incoloy alloy outside the cooking tank to facilitate cleaning and enhance durability.
- Switch with 3 power levels 0-1-2-3.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Green light indicating the voltage presence.
- Water dispenser on the rear of the worktop.
- Overflow for draining starch in the front part of the tank.
- Bottom draining.
- Technical compartment for easy connection to the electrical network.
- Baskets not included.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

TECHNICAL DATA


TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TANK CAPACITY	24lt	LOADING WATER	Water inlet on the worktop
TANK DIMENSIONS	30,5x34,1x30,3 cm	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	TANK TYPE	AISI 316
WATER CONNECTION POSITION	Bottom	WATER DRAIN POSITION	Bottom
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	375 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-471 mm	GAS CONNECTION DIAMETER	1/2"G EN10226-1
WATER CONNECTION DIAMETER	1/2"	DRAIN DIAMETER	1"
DRAIN CONNECTION HEIGHT (H)	0 mm	DRAIN CONNECTION HEIGHT (X)	145 mm
DRAIN CONNECTION HEIGHT (Y)	-365 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	45 cm	PACKAGE HEIGHT	113 cm
NET WEIGHT	39,0000 kg	GROSS WEIGHT	50 kg
VOLUME	0,41 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1200.0 W	SENSIBLE HEAT RELEASE	210.0 W
STEAM RELEASE	1764.0 g/h		

ACCESSORIES

120620	PASTA COOKER BASKETS (2 X GN1/3) - DIM. CM (29X16X20H)
120625	PASTA COOKER BASKET (4 X GN1/6) - DIM. CM (14X14X20H)
120635	PASTA COOKER BASKET (1 X GN2/3) - DIM. CM (29X29X20H)
120652	PASTA COOKER LID (GN2/3)
120660	PASTA COOKER BASKET (1 X GN1/3 + 2 X GN1/6) - DIM. CM (29X16X20H) (14X14X20H)
120700	PASTA COOKER BASKET (2 X GN2/6) - DIM. CM (14,5X29X20H)
719004	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

+

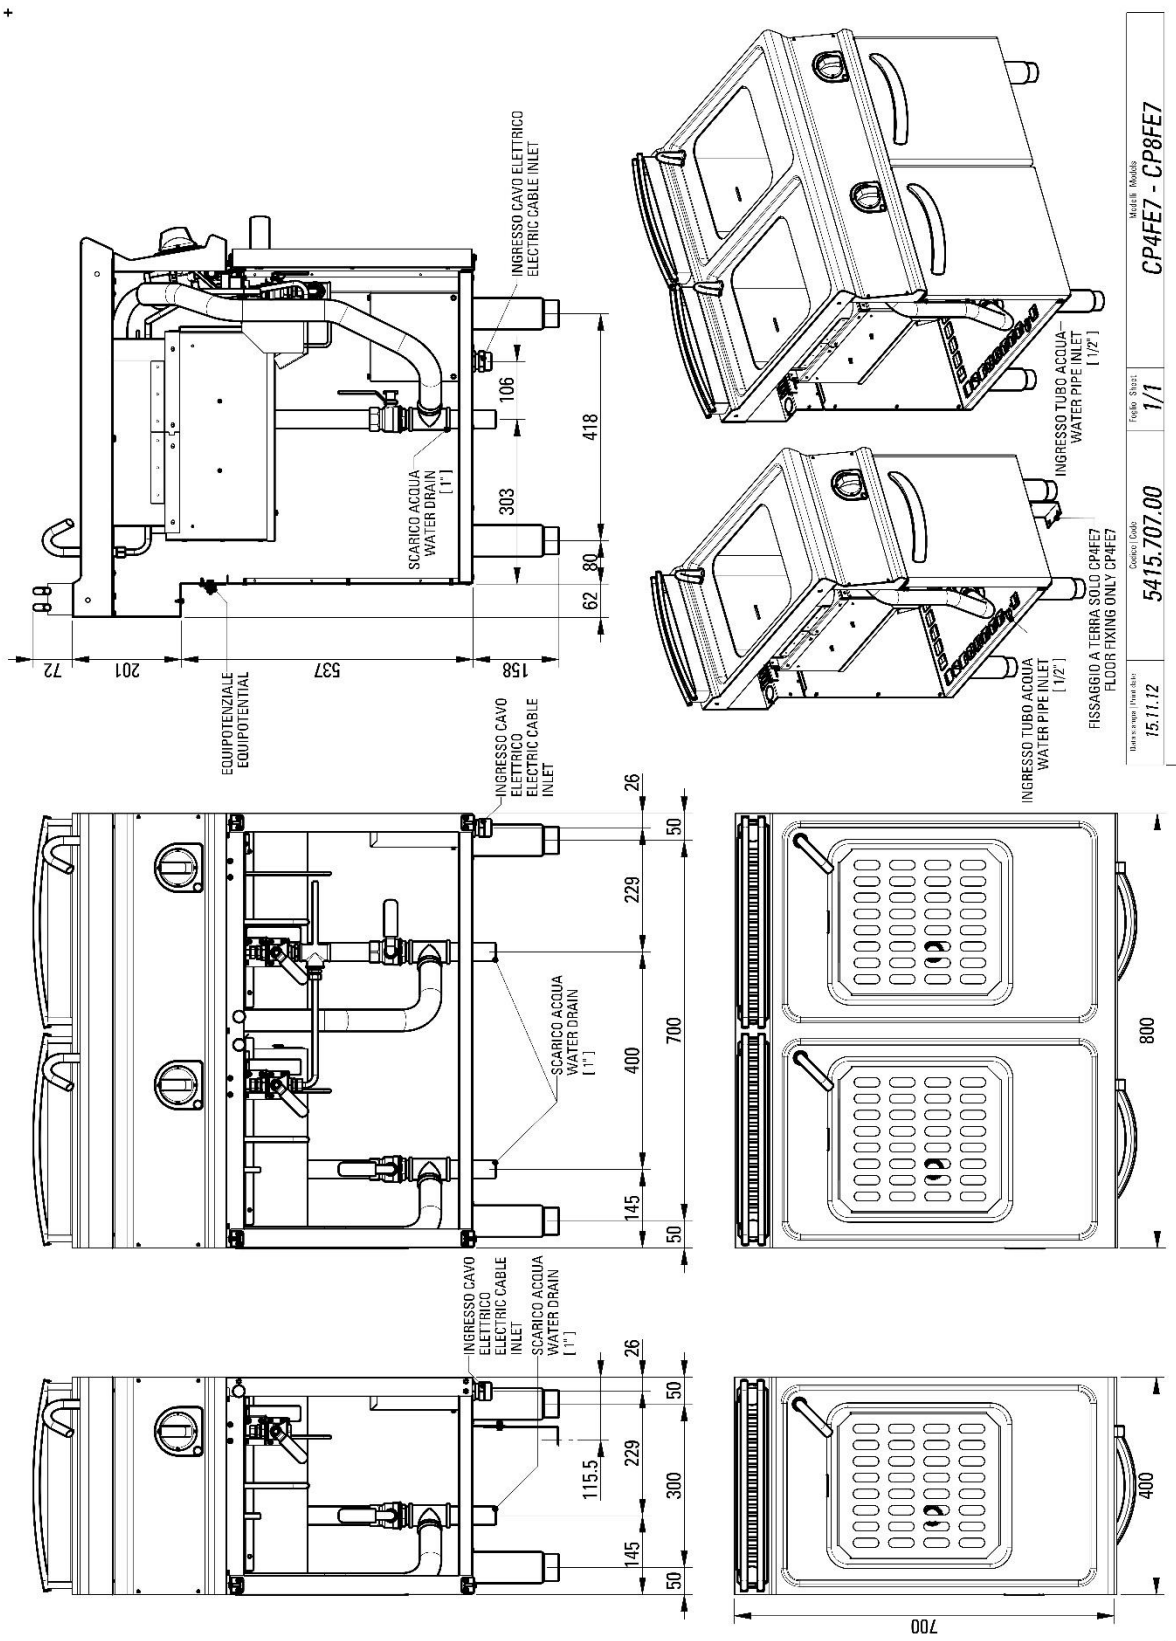

Modello / Model	CP4FE7 - CP8FE7
Versione / Version	1/1
Prezzo / Price	5415.707,00
Reviz. / Rev.	15.11.12