
716072

BRM8FE7

**FREESTANDING ELECTRIC MULTI-PURPOSE
BRATT PAN 28L WITH DUPLEX TANK ON OPEN
CABINET**



- Freestanding multi-purpose electric bratt pan 28 L on an open cabinet (80 cm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- The bratt pan is intended to braise and prepare stews, sauces, risottos, pan-fried vegetables and cooking with minimal liquid. Use as a fryer is not allowed.
- Fixed tank with rounded corners seamlessly welded to the worktop. DUPLEX tank bottom (12 mm) and AISI 304 stainless steel walls (2 mm).
- Heating through infrared heating elements placed under the tank bottom, reducing heat dispersion and allowing for faster reaching of the operating temperature.
- Thermostatic regulation 0-325°C.
- The tank is emptied by lifting the Teflon cap and the product is collected in a GN1/1 h 15 cm container inside the cabinet.
- Green light indicating voltage presence.
- A safety thermostat triggers in case of abnormal operation.
- Technical compartment for easy connection to the electrical network.
- AISI 304 height-adjustable feet (133/195 mm).

TECHNICAL DATA

TOTAL POWER	9 kW	ELECTRIC POWER	9 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	50÷320 °C	TANK CAPACITY	28t
TANK DIMENSIONS	67,2x57x10,2 cm	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
TANK BOTTOM THICKNESS	10 mm	DRAINING THE TANK	Drain in the tank
ELECTRIC CABLE TYPE	H07 RN-F	WIDTH	80 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	87 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	66 kg
GROSS WEIGHT	83,5 kg	VOLUME	0,80 m ³
HARMONISED CODE	84198180		

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719005	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

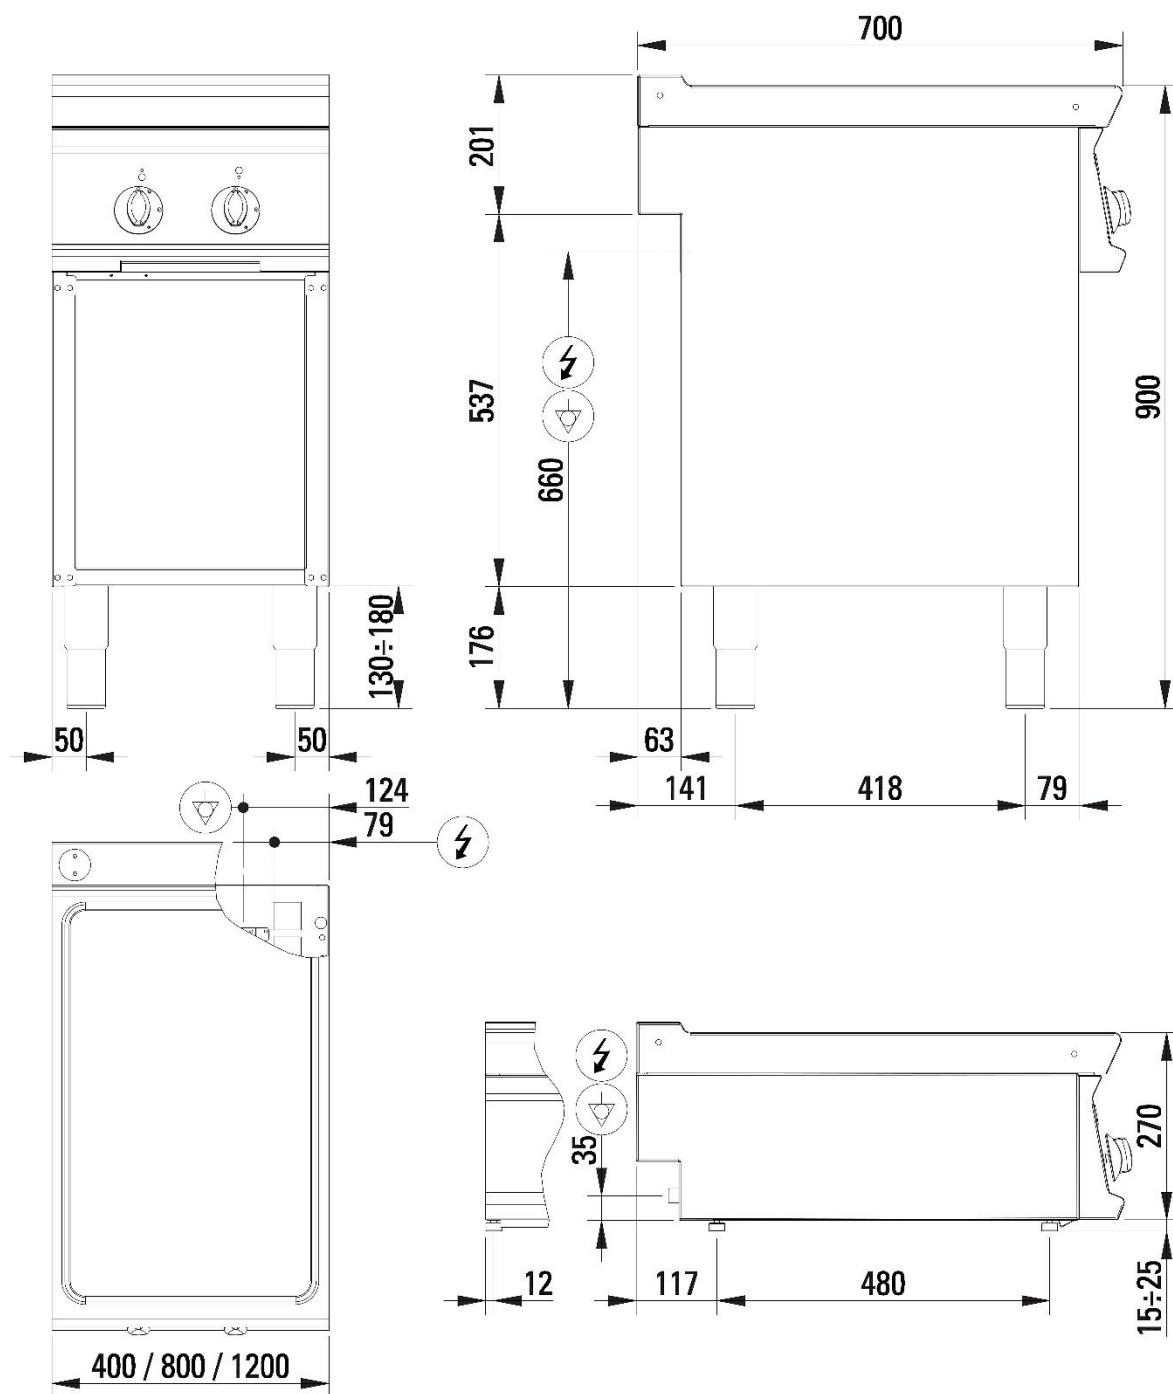


Fig.1 | Abb.1 | рис.1 - 5415.648.00