
716101

PCU4FE7

FREESTANDING ELECTRIC BOILING TOP WITH 2 SQUARED COPLANAR TILTING PLATES (30X30 CM - 11.8X11.8 IN) ON OPEN CABINET



- Freestanding boiling top with 2 coplanar, tilting, electric plates on an open cabinet (40 cm).
- Coplanar, tilting, squared, cast iron electric plates (30x30 cm and 8 mm thick) not hermetically sealed to the worktop.
- 3 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are on.
- Drawer to collect cooking residue.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	6 kW	COOKING ZONE POWER	2X3 n° - kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	CABINET DIMENSIONS	33x57,4x39,5 cm
NUMBER OF COOKING ZONES	n° 2	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	30,0000 kg
GROSS WEIGHT	42,0000 kg	VOLUME	0,4300 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	480.0 W
SENSIBLE HEAT RELEASE	1200.0 W	STEAM RELEASE	708.0 g/h

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719004	TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
799503	SIDE COVERING PANEL FOR FREESTANDING MODULE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

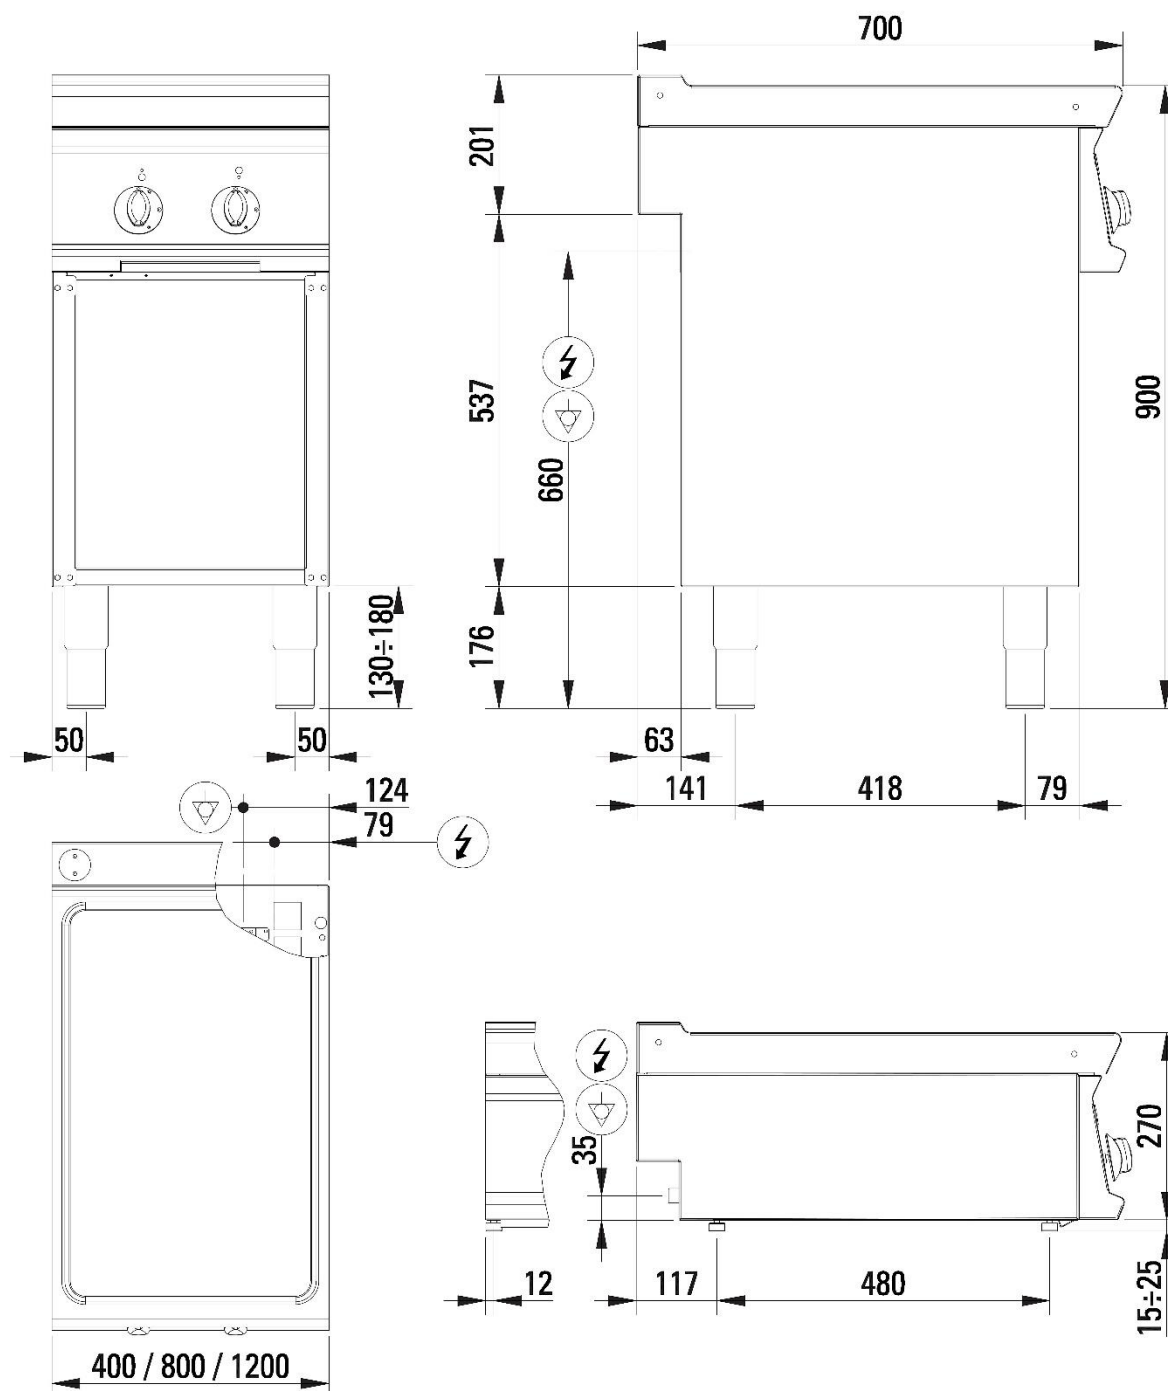


Fig.1 | Abb.1 | рис.1 - 5415.648.00