
716201

FTL12E7

ELECTRIC GRIDDLE WITH SMOOTH PLATE (TOP VERSION)



- Electric griddle (120 cm), top version with a smooth steel cooking plate.
- Recessed cooking plate hermetically sealed to the worktop allowing for the preparation of large quantities of diverse foods.
- The cooking plate, recessed and hermetically welded to the worktop, allows you to cook large quantities of different foods.
- Inclined cooking plate (15 cm thick) to promote the drainage of grease and liquids.
- Sloped cooking plate (15 mm thick) to facilitate the drainage of grease and liquids.
- 3 independent cooking zones.
- Height-adjustable (15/25 mm) rubbed plastic feet.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.

TECHNICAL DATA

TOTAL POWER	11,7 kW	ELECTRIC POWER	11,7 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TEMPERATURE RANGE	60÷270 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²
COOKING SURFACE	113x56 cm	ELECTRIC CABLE TYPE	H07 RN-F
PLATE TYPE	Smooth	HEATING ZONES	n° 3
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	721 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	127 cm
PACKAGE DEPTH	79 cm	PACKAGE HEIGHT	54 cm
NET WEIGHT	123 kg	GROSS WEIGHT	132 kg
VOLUME	0,55 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	4680.0 W	SENSIBLE HEAT RELEASE	3861.0 W
STEAM RELEASE	6879.6 g/h		

ACCESSORIES

120595	GRIDDLE-CLEANING SCRAPER
120597	SCRAPER - SPARE BLADE KIT (10 PCS)
719040	SIDE HEAT PROTECTION DEVICE
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

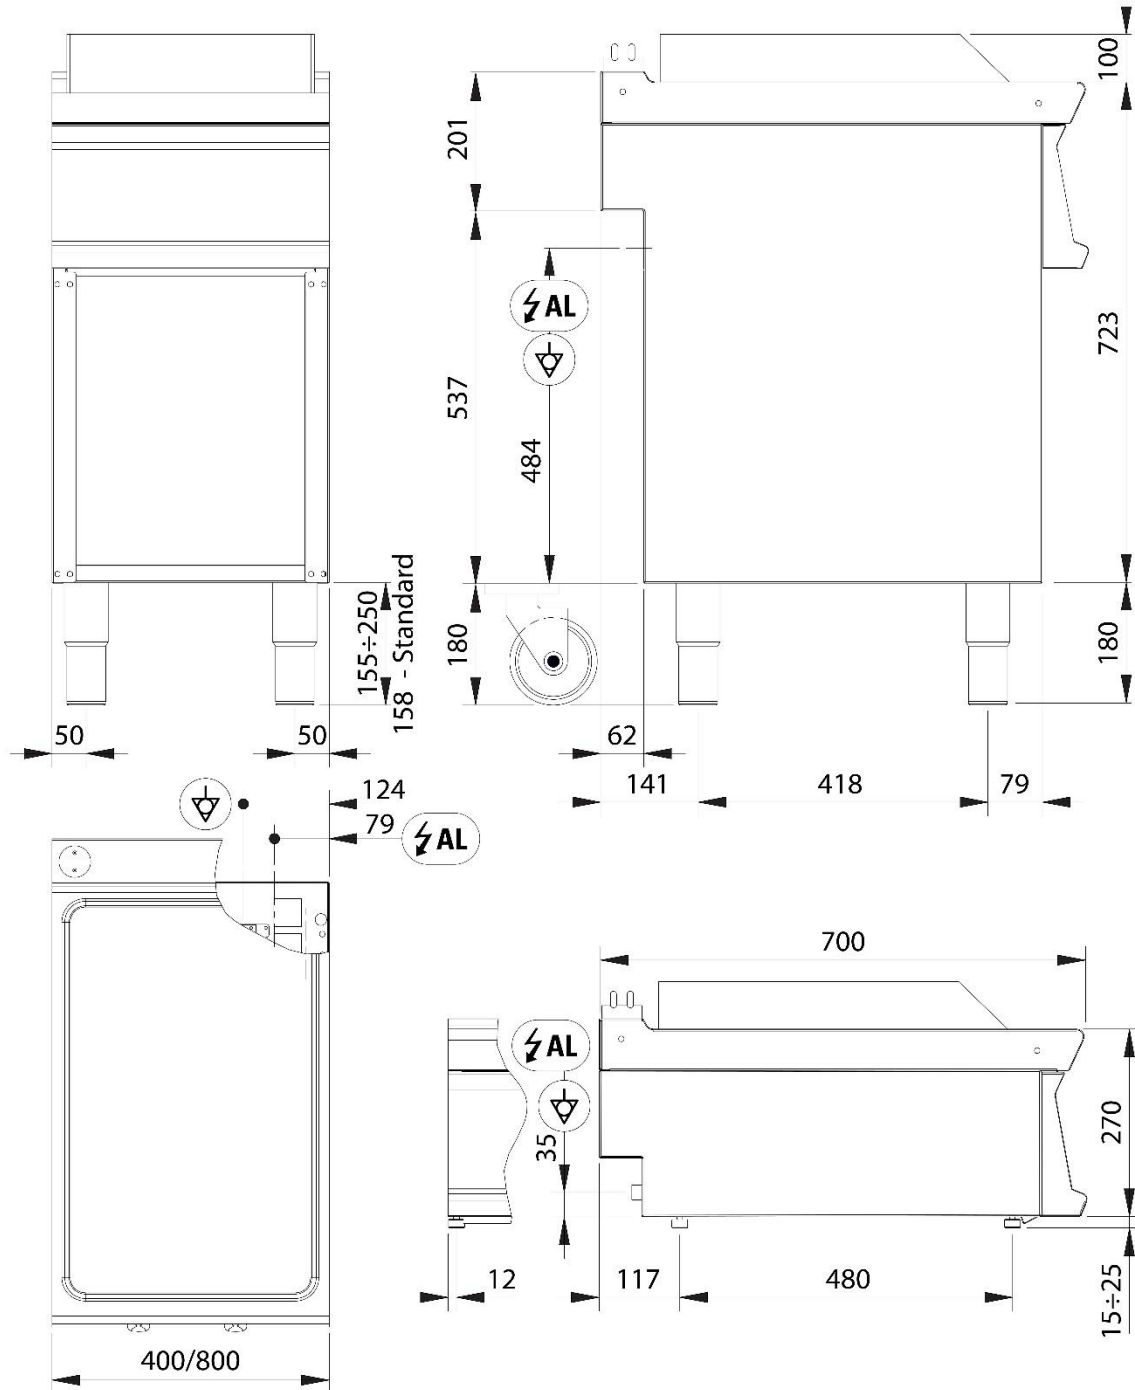


Fig.1 | Abb.1 | рис.1 - 5415.654.00